

Silicon PNP Power Transistors

BD440 BD442

DESCRIPTION


- With TO-126 package
- Complement to type BD439, BD441

APPLICATIONS

- For medium power linear and switching applications

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector; connected to mounting base
3	Base

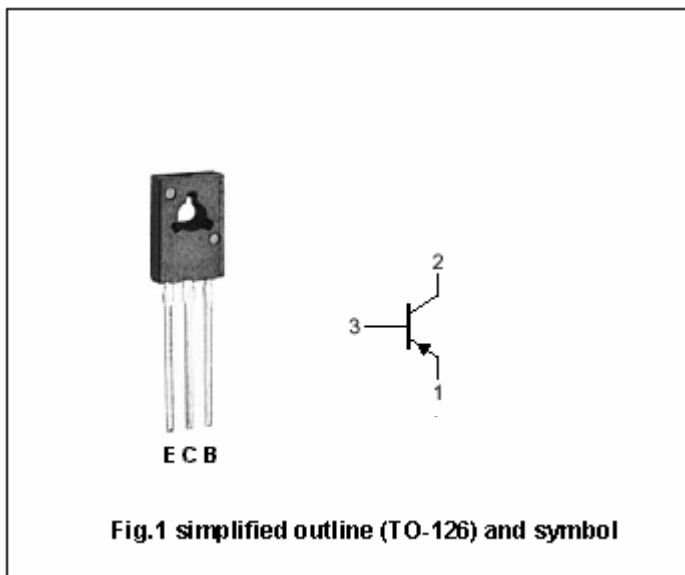

Absolute maximum ratings (Ta=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	BD440	-60	V
		BD442	-80	
V _{CEO}	Collector-emitter voltage	BD440	-60	V
		BD442	-80	
V _{EBO}	Emitter -base voltage	Open collector	-5	V
I _C	Collector current (DC)		-4	A
I _{CM}	Collector current-Peak		-7	A
I _B	Base current		-1	A
P _C	Collector power dissipation	T _C =25	36	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-65~150	

Silicon PNP Power Transistors

BD440 BD442

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEsat}	Collector-emitter saturation voltage	I _C =-2A; I _B =-0.2A			-0.8	V
V _{BE-1}	Base-emitter on voltage	I _C =-10mA; V _{CE} =-5V		-0.58		V
V _{BE-2}	Base-emitter on voltage	I _C =-2A; V _{CE} =-1V			-1.5	V
V _{CEO(SUS)}	Collector-emitter sustaining voltage	BD440	I _C =-0.1A; I _B =0	-60		V
		BD442		-80		
I _{CBO}	Collector cut-off current	BD440	V _{CB} =-60V; I _E =0		-100	μA
		BD442		V _{CB} =-80V; I _E =0		
I _{CES}	Collector cut-off current	BD440	V _{CE} =-60V; V _{BE} =0		-100	μA
		BD442		V _{CE} =-80V; V _{BE} =0		
I _{EBO}	Emitter cut-off current	V _{EB} =-5V; I _C =0			-1	mA
h _{FE-1}	DC current gain	BD440	I _C =-10mA; V _{CE} =-5V	20	130	
		BD442		15		
h _{FE-2}	DC current gain	I _C =-0.5A; V _{CE} =-1V	40		140	
h _{FE-3}	DC current gain	BD440	I _C =-2A; V _{CE} =-1V	25		
		BD442		15		
f _T	Transition frequency	I _C =-250mA; V _{CE} =-1V	3			MHz

Silicon PNP Power Transistors

BD440 BD442

PACKAGE OUTLINE

