

KR 2508 3.5 MHz Lowpass Filter

General Description

KR 2508 is a 3.5 MHz lowpass filter. Please consult the factory for other frequencies.


Features

- 3.5 MHz cutoff frequency
- Small DIP package
- 75 Ω Source and Load

Typical Performance


Amplitude & Group Delay

(0.5 dB/div & 20 nsec/div) 0.1 MHz to 3.5 MHz

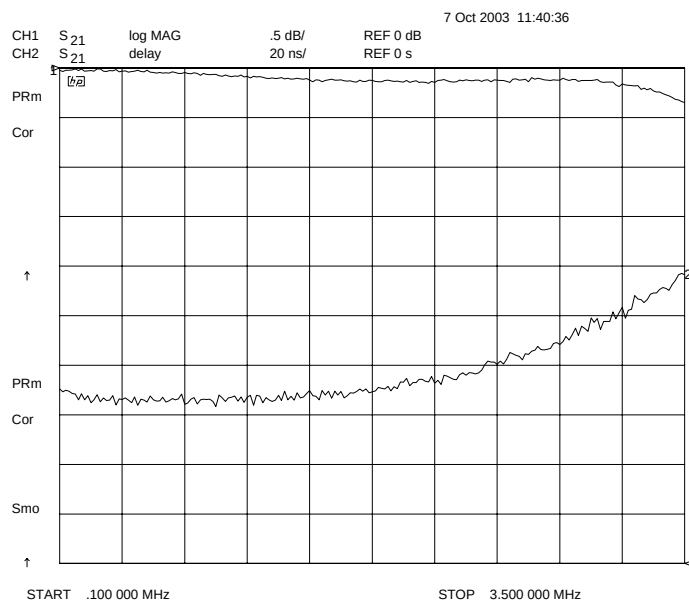

Overall Response

(5 dB/div) 100 KHz to 100 MHz

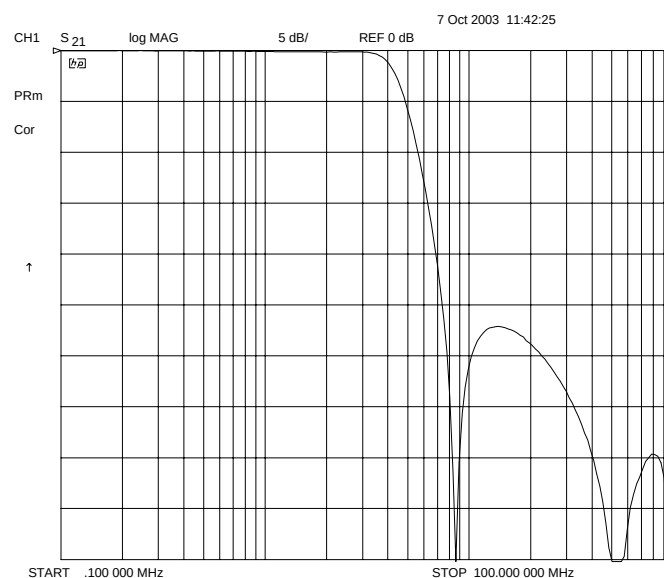

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Series 2508 Lowpass Filter

Specifications

Parameter	Specification
Filter type	Lowpass
End of passband (< 3 dB)	3.5 MHz
Start of stopband (> 25 dB)	8.5 MHz
Source & Load	75 Ω

Physical Dimensions

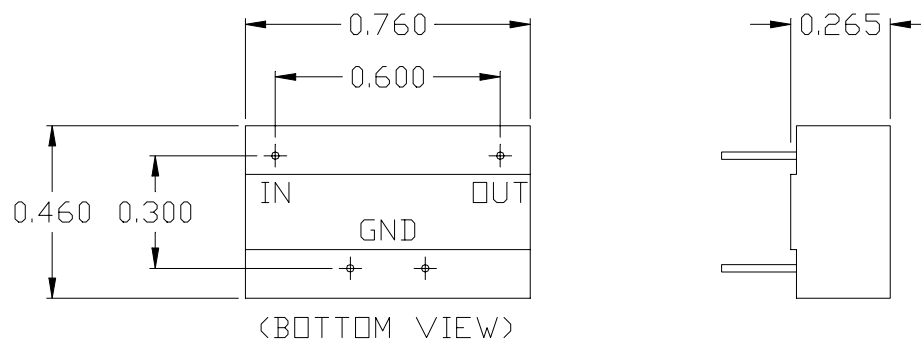

- NOTES:
1. TOLERANCE UNLESS NOTED ± 0.010 "
 2. LEAD DIAMETER 0.020"

All Dimensions Shown in inches