

GLASS PASSIVATED BRIDGE RECTIFIERS


REVERSE VOLTAGE - **50 to 1000** Volts
FORWARD CURRENT - **1.0** Amperes

FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead tin Pb/Sn copper
- The plastic material has UL flammability classification 94V-0

MECHANICAL DATA

- Polarity: As marked on Body
- Weight: 0.02 ounces, 0.38 grams
- Mounting position: Any

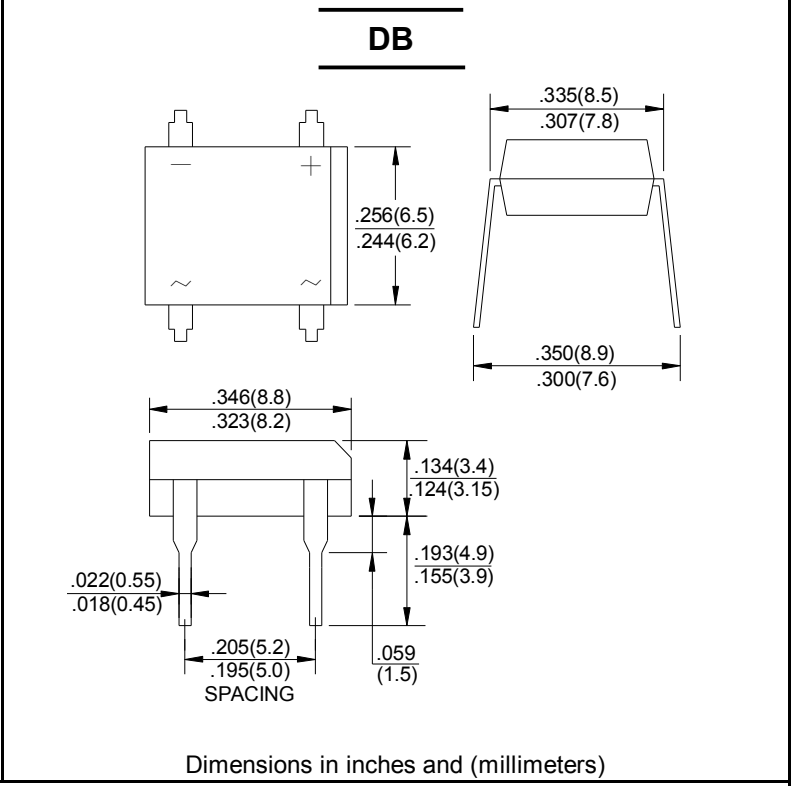

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

| CHARACTERISTICS | SYMBOL | DB101 | DB102 | DB103 | DB104 | DB105 | DB106 | DB107 | UNIT |
|---|-------------------|------------------------|-------|-------|-------|-------|-------|-------|------------------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Current @T _A =40°C | I _(AV) | 1.0 | | | | | | | A |
| Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method) | I _{FSM} | 50 | | | | | | | A |
| Maximum Forward Voltage at 1.0A DC | V _F | 1.1 | | | | | | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C | I _R | 10 | | | | | | | μA |
| | | @T _J =125°C | | | | | | | 500 |
| I ² t Rating for Fusing (t<8.3ms) | I ² t | 10.4 | | | | | | | A ² s |
| Typical Junction Capacitance Per Element (Note1) | C _J | 25 | | | | | | | pF |
| Typical Thermal Resistance (Note2) | R _{θJC} | 40 | | | | | | | °C/W |
| Operating Temperature Range | T _J | -55 to +150 | | | | | | | °C |
| Storage Temperature Range | T _{STG} | -55 to +150 | | | | | | | °C |

Note: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC
2. Thermal resistance from junction to ambient mounted on P.C.B with 0.5*0.5" (13*13mm) copper pads.

RATING AND CHARACTERISTIC CURVES

DB101 thru DB107



FIG.1-FORWARD CURRENT DERATING CURVE

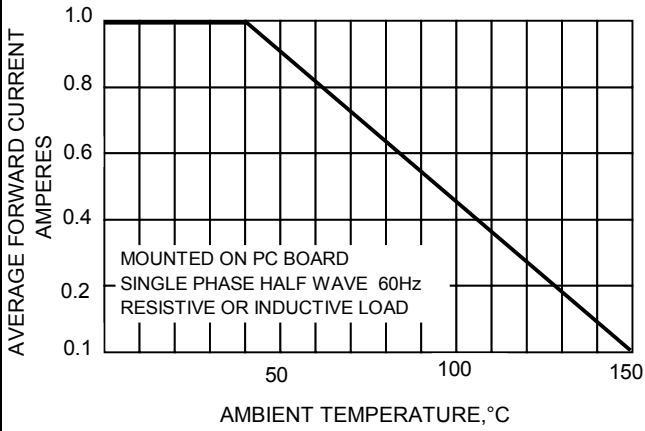


FIG.2-MXIMUM NON-REPETITIVE SURGE CURRENT

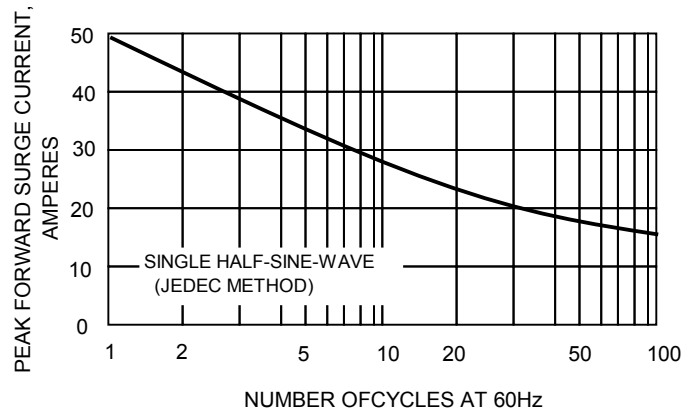


FIG.3-TYPICAL JUNCTION CAPACITANCE

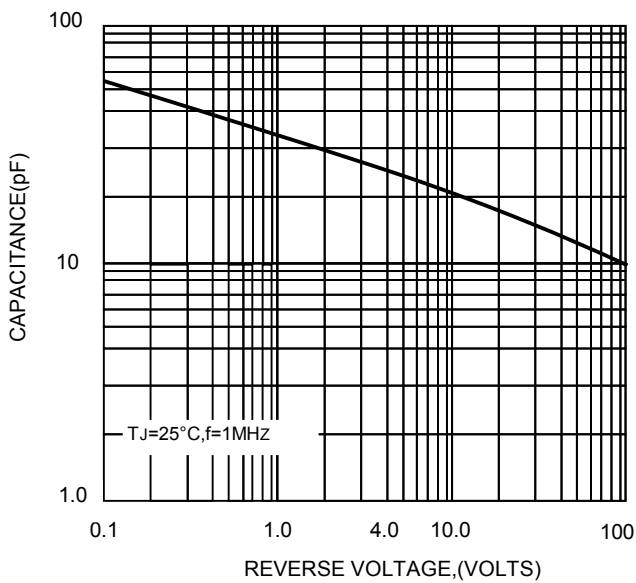


FIG.4-TYPICAL FORWARD CHARACTERISTICS

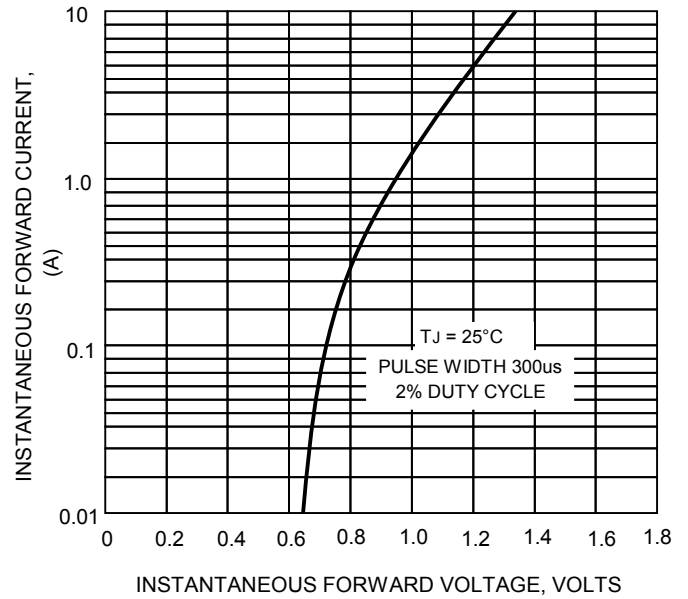


FIG.5-TYPICAL REVERSE CHARACTERISTICS

