



1. Dimensions:

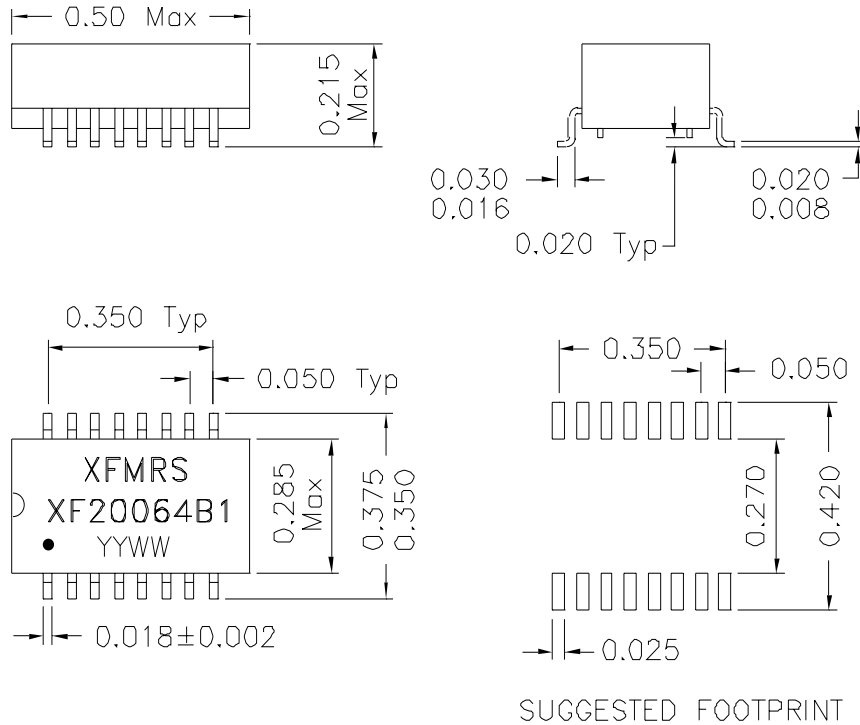

2. Schematic:

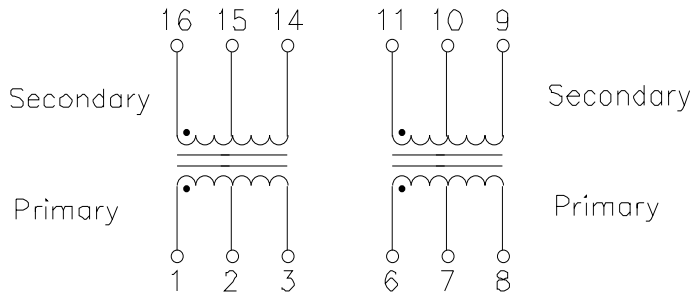

3. Electrical Specifications:@25°C

Isolation Voltage: 1500 VAC
 Turns Ratio: (1-2-3):(16-15-14)=1CT:1CT ±2%
 Turns Ratio: (6-7-8):(11-10-9)=1CT:2CT ±2%
 PRI OCL: 200uH ±20% @100KHz 50mV
 Cw/w: 15pF Maximum @100KHz 50mV (Pri/Sec)
 Leakage Inductance: 0.3uH Maximum @100KHz 50mV
 @PRI, WITH SEC SHORTED

DCR: 0.30 Ohms Maximum (PIN1-3, PIN16-14, PIN6-8)
 DCR: 0.50 Ohms Maximum (PIN11-9)

Doc Rev B/1

XFMRs Inc		Title: 10 BASE T ISOLATION MAGNETICS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch		P/N: XF20064B1	REV. B
		DWN. 李湾儿	Jan13, 99
		CHK. 孙小松	Jan13, 99
SHEET 1 OF 1		APP. BUDDY W.	Jan13, 99