


Bandpass Filter 232052B



1. Features

- IF bandpass filter
- Low-Loss Filter
- Single-ended operation
- Ceramic Surface Mount Device(SMD) Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

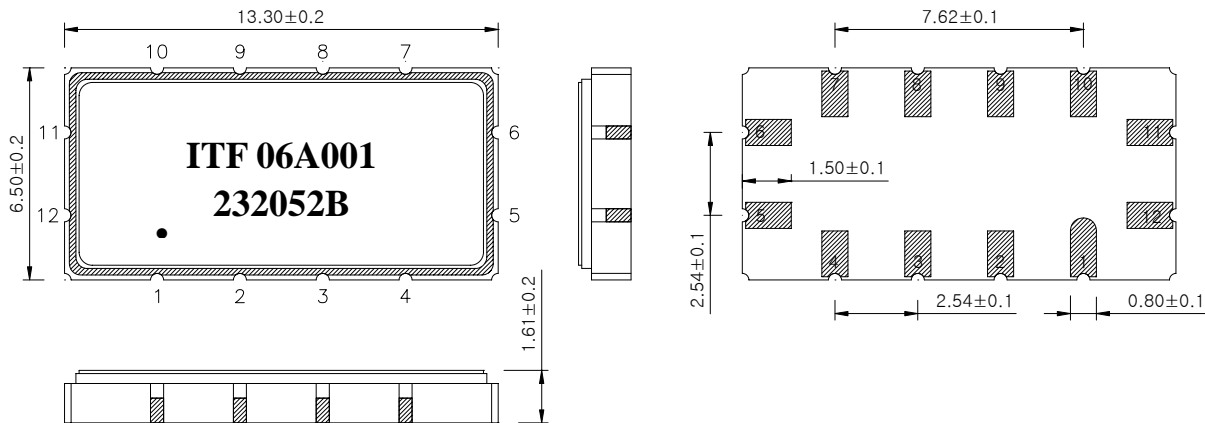

Package : S1365


Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Pin Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	232052B	
		Rev. Date	2007-01-04	
		Rev.	NJ6025-CS02	1/5

Bandpass Filter 232052B



3. Specifications


Fo = 75.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -30℃ ~ +80℃		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	75.0	-
Insertion Loss	dB	-	12.1	14.0
1dB Bandwidth	MHz	20.1	20.25	-
3dB Bandwidth	MHz	-	20.95	-
40dB Bandwidth	MHz	-	24.2	24.5
Amplitude Ripple (Fo +/- 9.32 MHz)	dB	-	0.35	1.0
Group Delay Variation (Fo +/- 9.32 MHz)	nsec	-	30	60
Absolute Delay	usec	-	1.07	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency (TCF)	ppm/°C	-	- 72	-

Room temperature : + 25℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	75.0	-
Insertion Loss	dB	-	12.1	13.5
Amplitude Ripple (Fo +/- 9.67 MHz)	dB	-	0.35	1.0
Group Delay Variation (Fo +/- 9.67 MHz)	nsec	-	30	60

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	232052B	
		Rev. Date	2007-01-04	
		Rev.	NJ6025-CS02	2/5

Bandpass Filter 232052B




Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss

4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

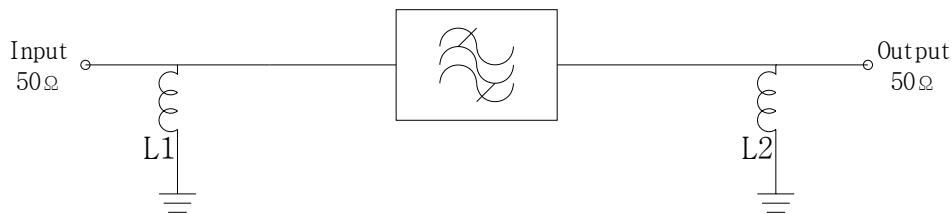

$$L1 = 120 \text{ nH}, \quad L2 = 56 \text{ nH}$$


5. Marking Configuration

ITF¹⁾06A001²⁾

232052B³⁾

●⁴⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Pad Number 1 Index

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	232052B	
		Rev. Date	2007-01-04	
		Rev.	NJ6025-CS02	3/5

Bandpass Filter 232052B







6. Typical Performance (at +25°C)

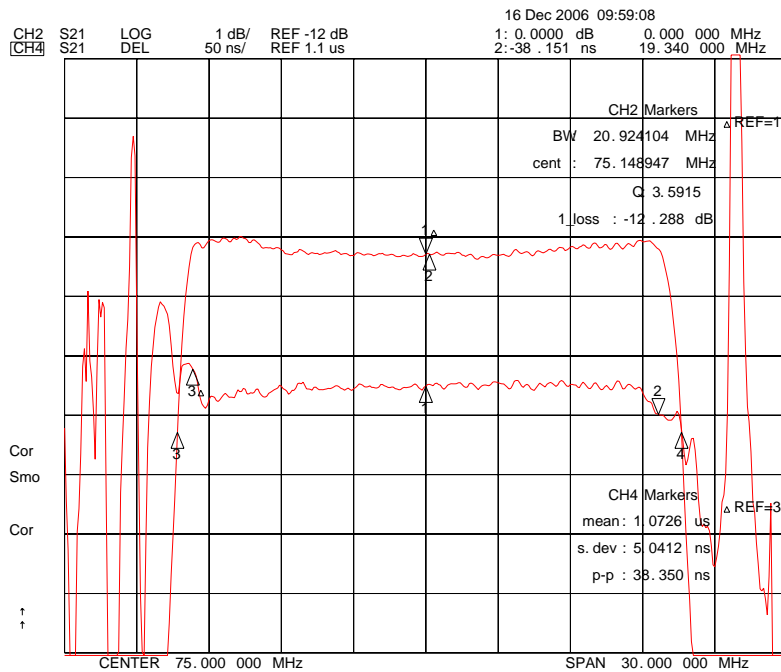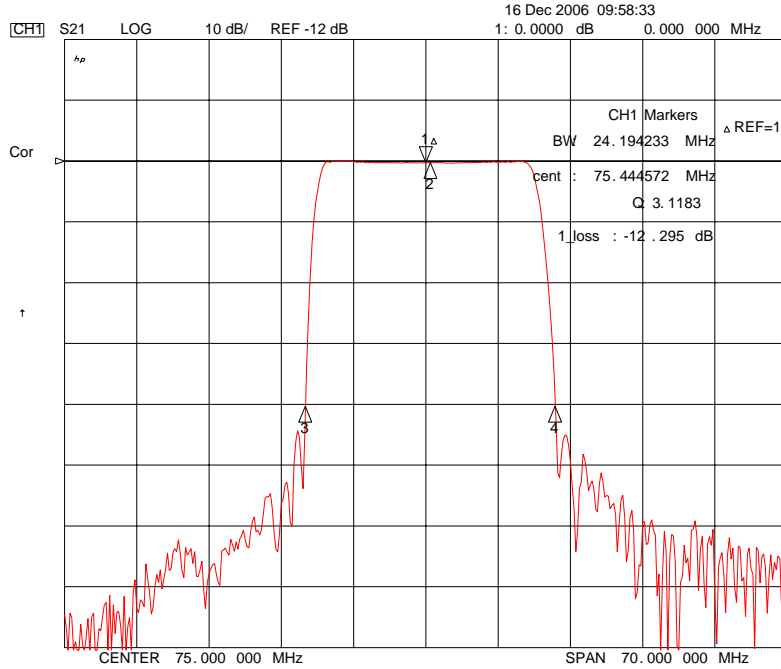

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	232052B	
		Rev. Date	2007-01-04	
		Rev.	NJ6025-CS02	4/5

Bandpass Filter 232052B

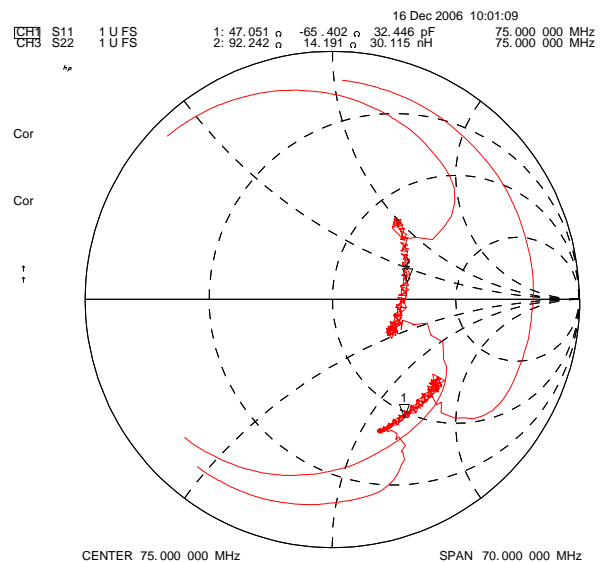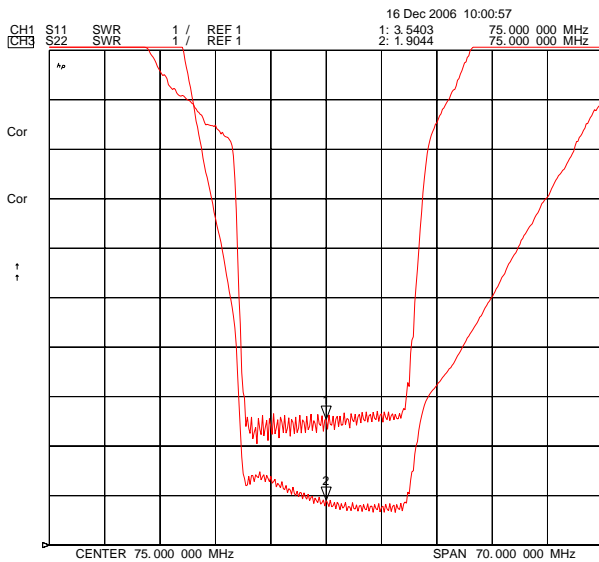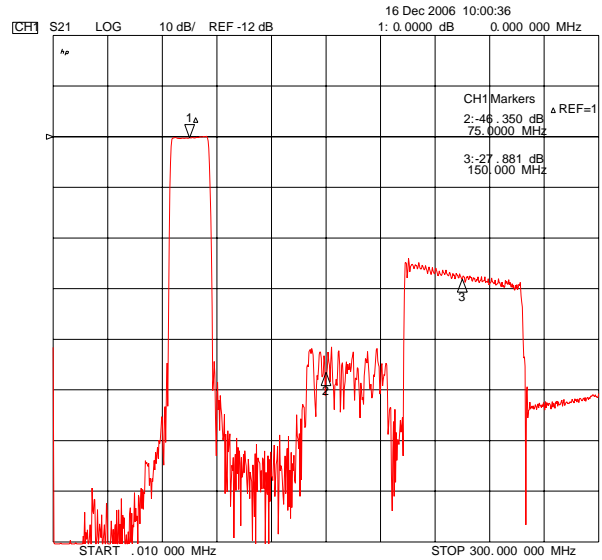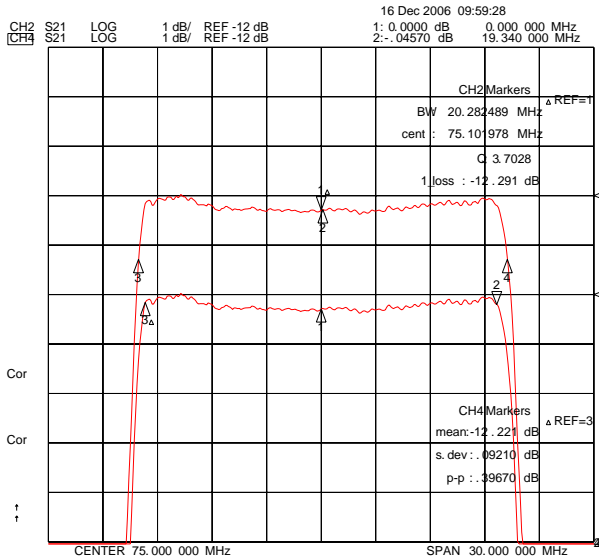

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	232052B	
		Rev. Date	2007-01-04	
		Rev.	NJ6025-CS02	5/5