


FEMALE HEADERS

FEMALE HEADERS - 4.5mm PROFILE

- Industry compatible
- Competitively priced
- Single or dual row
- No. of contacts 02-80
- Gold plated contacts
- 2.00mm pitch

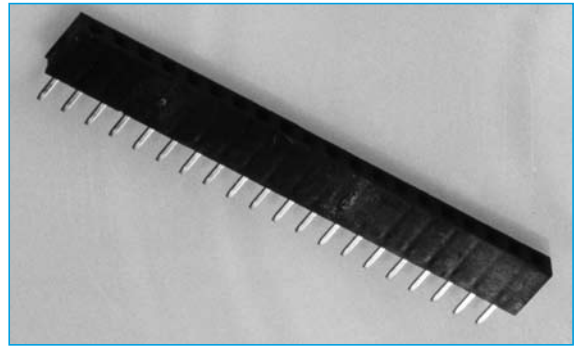

SECTION 8

SPECIFICATION

Material & Finish

Contact Material: Phosphor Bronze

Insulator Material: PBT & Glass-Fibre Reinforced UL-94V-0

Current Rating: 1 A DC


Contact Resistance: 30M Ω Max

Insulator Resistance: 3000M Ω Min


Dielectric Withstanding Voltage: 500V AC for One Minute

Operating Temperature: -40°C to + 105°C

OUTLINE DRAWING

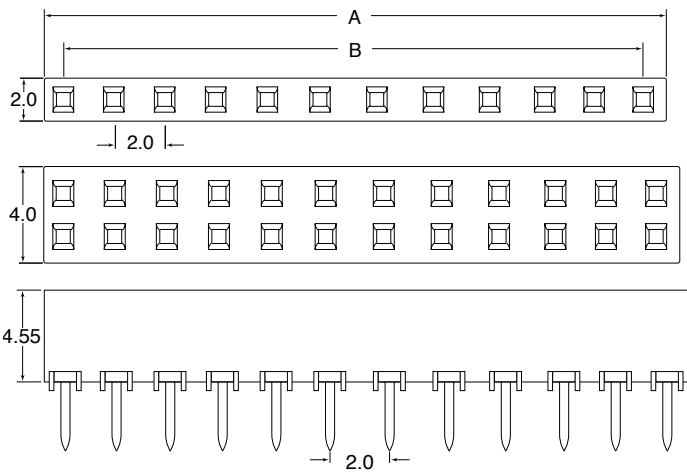

A = 2.00mm x N° of Contacts
 B = (2.00mm x N° of Contacts)-1

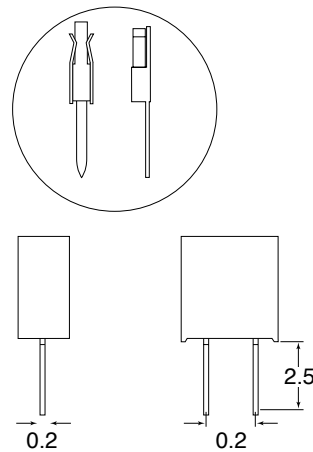

ORDERING INFORMATION

DBC	IDC	B13	S	04	B	G	1
Dubilier Connectors	IDC Connector	Series	N° of Rows	N° of Contacts/per row	Contact Material	Contact Plating	Colour
			S = Single Row D = Dual Row	02=2way Thro to 40=40way	B=Bronze	G= Gold Flash	1=Black