
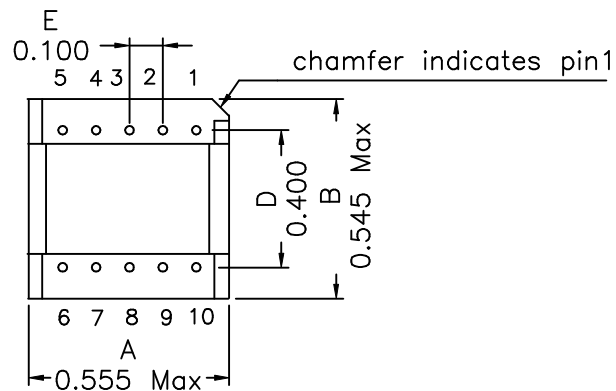
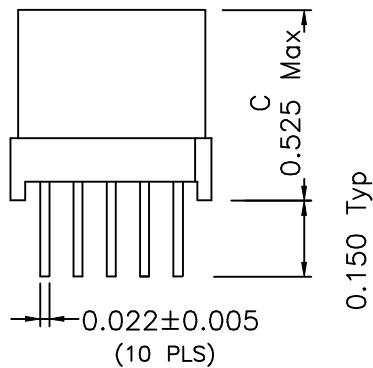


1. Mechanical Dimensions:




(BOTTOM VIEW)

Note: Designed to meet UL1950 for supplementary insulation, 250 working volts.

DOC. REV: A/1

2. Schematic:

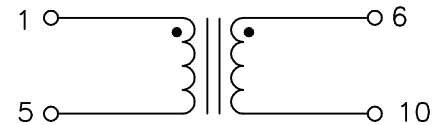

3. Electrical Specifications:

OCL: P1-5 1.5mH±5% 10KHz 0.1V
 OCL: P6-10 1.5mH±5% 10KHz 0.1V
 OCL: P1-5 1.5mH Typ 10KHz 0.1V 200mADC
 OCL: P1-10 6.0mH Typ 10KHz 0.1V 100mADC
 Tie (5-6)

DC Res.: 1-5 1.26 Ohms±10%
 6-10 1.26 Ohms±10%

Turns Ratio: 1-5:6-10 1:1

Isolation Voltage: 600VDC, Wdg to Wdg

XFMRS Inc	Title: Splitter Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0154-AD4	REV. A
	DWN. 廖玉坤	Feb-07-01
	CHK. 李清儿	Feb-07-01
Scale 1.5:1 SHT 1 OF 1	APP. Isaiah M	Feb-07-01