

FOR PHOTO FLASH

TS13D CD17

FEATURES

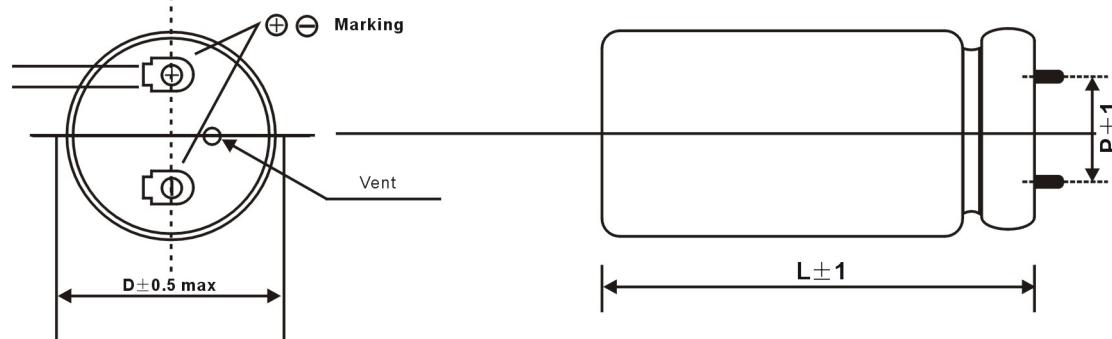
- High Stability
- Compact and light weight

**◆ Specifications**

I T E M S	P E R F O R M A N C E C H A R A C T E R I S T I C S
Operating Temperature Range(°C)	-20~+55
Rated Voltage	330WV.DC
Voltage Proof	350SV.DC
Capacitance Tolerance(20°C, 120Hz)	-10%~+20%
Dissipation Factor(20°C, 120Hz)	Capacitance: 150~600 μF Less than 0.1 :700~1500 μF Less than 0.15
Leakage Current	I=1xC (20°C, after 5 minutes) Max I: Leakage Current (μA) C: Rated Capacitance (μF)

◆ Dimensions

mm

**◆ Standard ratings**

330WV.DC(350SV.DC)

Capacitance (μF)	ΦD(mm)	20	22	25	30	35
150	P	8	10	10	10	10
180		25	--	--	--	--
200		30	25	--	--	--
250		35	30	25	--	--
300		40	30	--	--	--
350		45	35	30	25	--
400		50	40	35	25	--
450		--	45	40	30	25
500		--	50	45	35	25
600		--	--	55	35	30
700		--	--	--	40	30
800		--	--	--	45	35
900		--	--	--	50	40
1000		--	--	--	55	45
1200		--	--	--	60	50
1300		--	--	--	--	55
1500		--	--	--	--	60

360WV.DC(390SV.DC)

Capacitance (μF)	ΦD(mm)	20	22	25	30	35
150	P	8	10	10	10	10
180		30	25	--	--	--
200		35	30	25	--	--
250		40	35	30	25	--
300		45	40	35	30	--
350		50	45	40	35	25
400		--	50	45	35	25
450		--	55	50	35	30
500		--	--	60	40	30
600		--	--	--	40	35
700		--	--	--	--	45
800		--	--	--	--	50
900		--	--	--	--	60
1000		--	--	--	--	60
1200		--	--	--	--	50
1300		--	--	--	--	55
1500		--	--	--	--	60

Note: Specification are subject to change without notice. For more detail and update, please visit our website.