
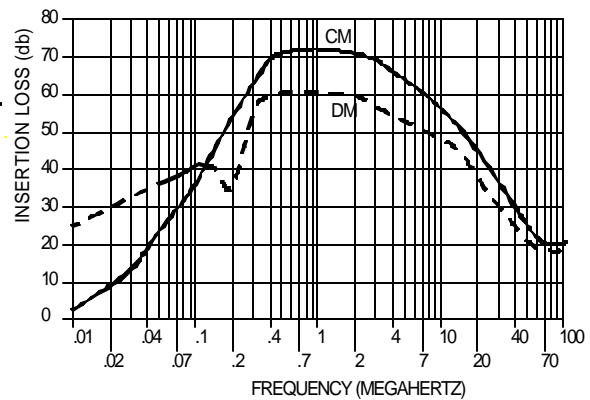
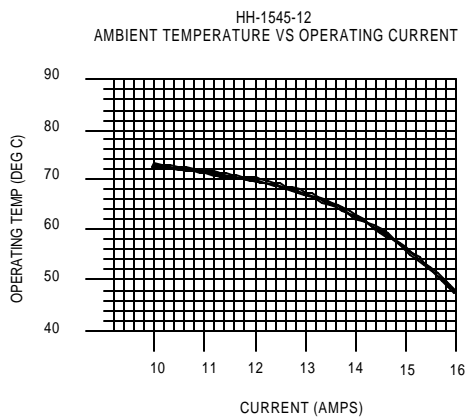


Operating voltage = 100 Vdc
Operating current = 12.0 Amp
Operating temperature = (-40)—70C
Diel. withstanding (line - case) = 1500 Vdc (1.0 Minute)
Diel. withstanding (line - line) = 200 Vdc (1.0 Minute)

Order P/N: HH-1590-12

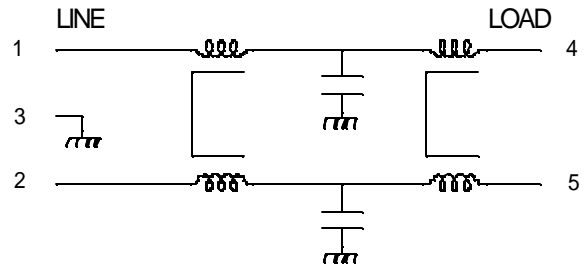

This filter is a compact DC power filter designed to operate in telecommunications equipment. The filter is non-polarized and can operate over a wide temperature range. The filter is configured to function in the Mil-Std-461E or the EN55022 environment.

This circuit board mount filter uses very little space yet provides a lot of attenuation to meet today's emissions requirements

