

"High Frequency Ceramic Solutions"

3.70 GHz Balun

Detail Specification: 01/08/03

P/N 3700BL15B100


Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
3700BL15B100_	3400 - 4000	50/100 Ω	1.0 dB	9.5 dB	180°±20°	1.0 dB

Input Power	Impedance	Operating Temperature Range	Reel Qty
100 milliwatts max.	50 /100 Ω	-40 to +85°C	4,000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/- .008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

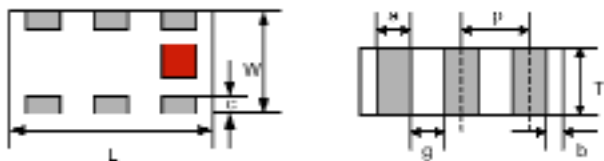


Terminal Configuration

1	Unbalanced Port	4	Balanced Port
2	GND or DC Feed	5	GND
3	Balanced Port	6	NC



Mounting Considerations


Mount devices with colored mark facing up.

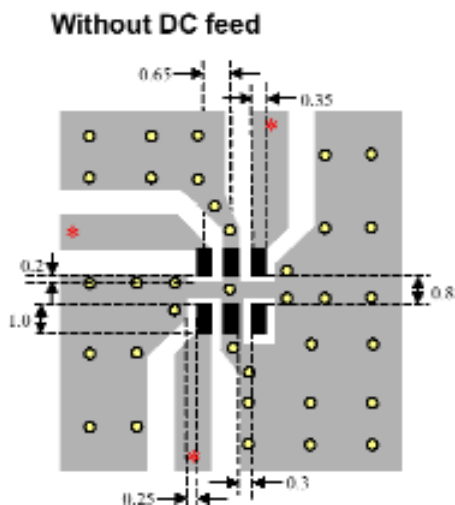

* Line width should be designed to provide 50 Ω impedance matching characteristics.

- Solder Resist
- Land
- Through-hole (ϕ 0.3)

Units: mm

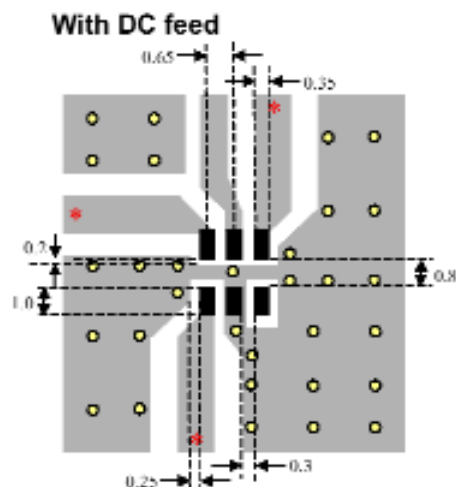

*Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.*

“High Frequency Ceramic Solutions”


3.70 GHz Balun

Detail Specification: 01/08/03

P/N 3700BL15B100

Page 2 of 2

P/N 3700BL15B100 Typical Insertion Loss

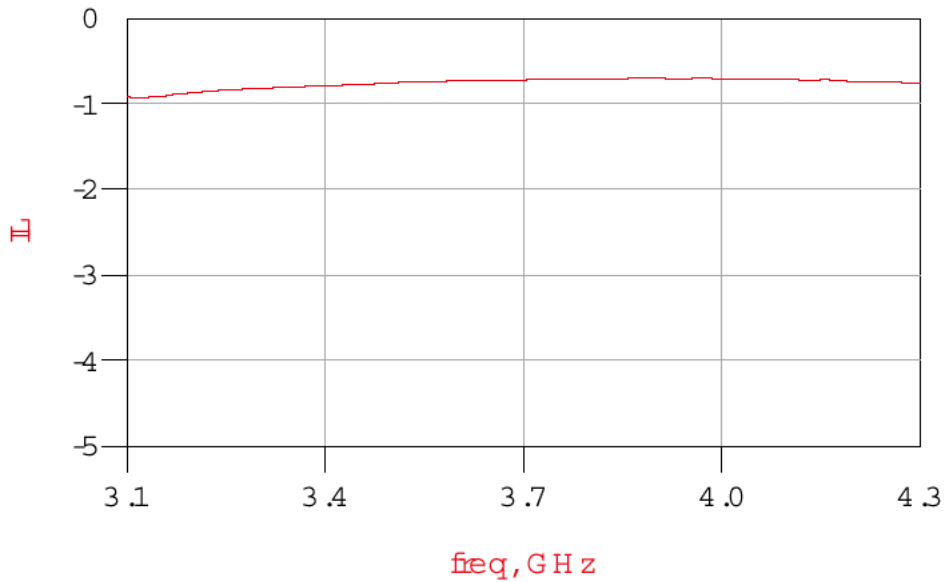

P/N 3700BL15B100 Typical Return Loss

