

Cartridge Fuse, 6.3x32 mm, low resistance, up to 30 A

new



UL 248-14 · 250 VAC · Slow-Blow



Description

- Up to 30 A, low resistance
- Ceramic Tube

Standards

- UL 248-14
- CSA C22.2 no. 248.14

Approvals

- UL File Number: E184831

Applications

- Single-phase high current applications up to 30 A
- Industrial electronic


References

General Product Information
 Pigtail Type SUT 6.3x32 Pigtail
 Corresponding Fuseholder CQP


Weblinks

Approvals, RoHS, CHINA-RoHS, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)

Technical Data

| | |
|------------------------------|---|
| Rated Voltage | 250 VAC |
| Rated Current | 12 - 30 A |
| Breaking Capacity | 500 A |
| Characteristic | Slow-Blow |
| Admissible Ambient Air Temp. | -40 °C to 85 °C |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 |
| Material: Tube | Ceramic |
| Material: Endcaps | Nickel-Plated Brass |
| Material: Filler | Sand |
| Unit Weight | 2.8 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking |  Type, Current, Voltage, Approvals |


Dimensions

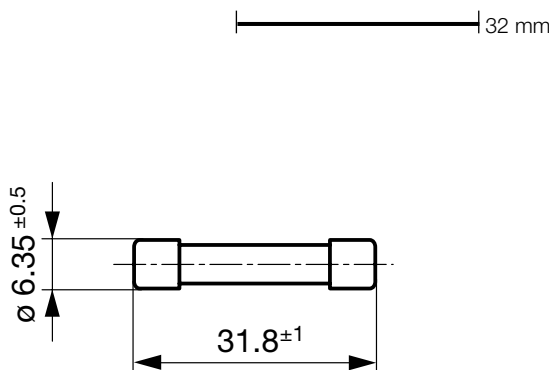

Pre-Arcing Time

| Rated Current In | 1.0 x In min. | 1.35 x In max. | 2.0 x In min. | 2.0 x In max. |
|------------------|---------------|----------------|---------------|---------------|
| 12 A - 30 A | 4 h | 60 min | 5 s | 60 s |

Variants

| Rated Current [A] | Rated Voltage [VAC] | Breaking Capacity | Voltage Drop 1.0 In typ. [mV] | Cold Resistance typ. [mΩ] | Melting I ² t 10.0 Intyp. [A ² s] |  | Order Number |
|-------------------|---------------------|-------------------|-------------------------------|---------------------------|---|---|--------------|
| 12 | 250 | 1) | 78 | 5.6 | 72 | ● | 8020.0603 |
| 15 | 250 | 1) | 81 | 4.7 | 152 | ● | 8020.0604 |
| 20 | 250 | 1) | 87 | 3.6 | 750 | ● | 8020.0605 |
| 25 | 250 | 1) | 62 | 2.1 | 1010 | ● | 8020.0606 |
| 30 | 250 | 1) | 64 | 1.8 | 2050 | ● | 8020.0607 |

1) 500 A @ 250 VAC, 10 kA @ 125 VAC

Packaging Unit xxxx.xxxx Small Box Pack (10 pcs.)
 xxxx.xxxx.G Bulk (1000 pcs.)

Time-Current-Curves

