

RF AMPLIFIER

MODEL *TM4179*

Available as: TM4179, 4 Pin TO-8 (T4)
 TN4179, 4 Pin Surface Mount (SM3)
 BX4179, Connectorized Housing (H1)

Features

- High Output Power: +26.5 dBm Typical
- High IP3: +38 dBm Typical
- Operating Temp. -55 °C to +71 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +71 °C
Frequency	10 - 400 MHz	10 - 400 MHz
Gain (dB)	+14.5	+14.0 Min.
Power @ 1 dB Comp. (dBm)	+26.5	+26.0 Min.
Reverse Isolation (dB)	-16	-15 Max.
VSWR In	1.5:1	2.0:1 Max.
Out	1.5:1	2.0:1 Max.
Noise Figure (dB)	4.0	4.5 Max.
Power Vdc	+15	+15
mA	130	135 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +53 dBm (Typ.)
 Second Order Two Tone Intercept Point +48 dBm (Typ.)
 Third Order Two Tone Intercept Point +38 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to +85 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +85 °C
 DC Voltage +17 Volts
 Continuous RF Input Power +15 dBm
 Short Term RF Input Power 200 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

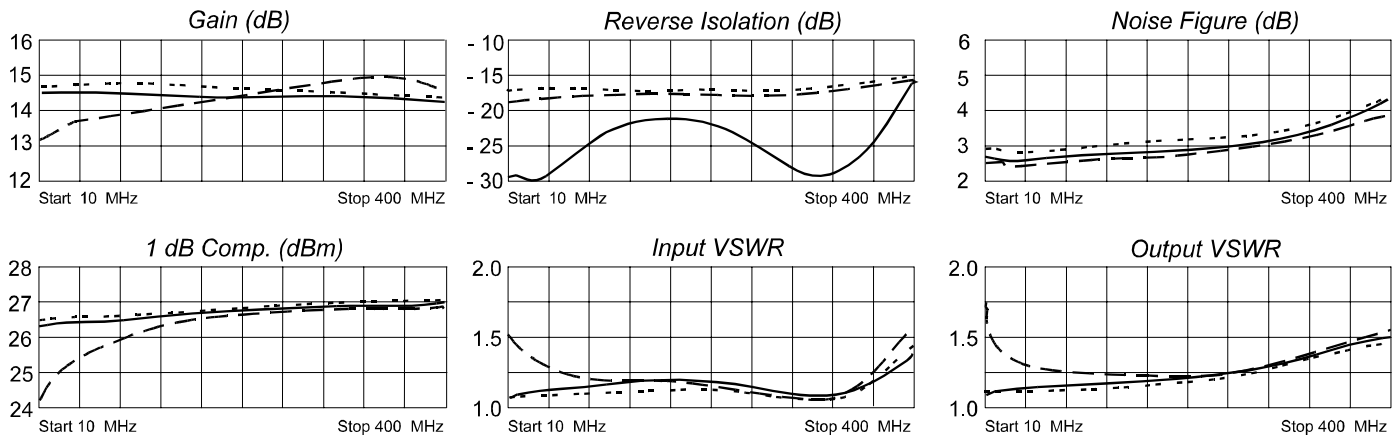

Legend ——— +25 °C - - - - +71 °C ······ -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	0.03	141	5.24	-173	0.03	141	0.05	133
49	0.03	118	5.23	167	0.04	118	0.04	128
88	0.05	87	5.18	155	0.05	87	0.05	101
127	0.07	60	5.19	144	0.07	60	0.06	74
166	0.08	38	5.20	132	0.08	38	0.07	48
205	0.08	20	5.23	121	0.08	20	0.08	22
244	0.07	3	5.26	108	0.08	3	0.09	-4
283	0.06	-3	5.30	96	0.06	-3	0.10	-34
322	0.04	23	5.29	82	0.04	23	0.13	-66
361	0.07	71	5.24	68	0.07	71	0.16	-96
400	0.16	67	5.11	53	0.06	67	0.21	-124



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 Rev. 1/11/08

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001