

# Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance *	3.0		mH
DCR		180	mΩ
Current		2.0	A <sub>RMS</sub>
Leakage Inductance *		50	μH
SRF	1000		kHz

Rated Voltage 250 VAC


Hipot (Isolation) 2500 VAC

Insulation Resistance 100MΩ


Temperature Rise 60°C Max.

Operating Temperature Range -25°C to +60°C

Schematic Diagram

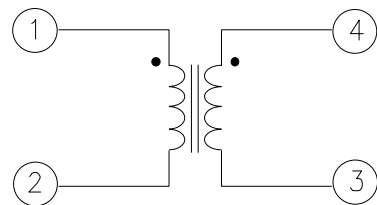

\* Inductance tested at 100mV<sub>RMS</sub> and 10 kHz

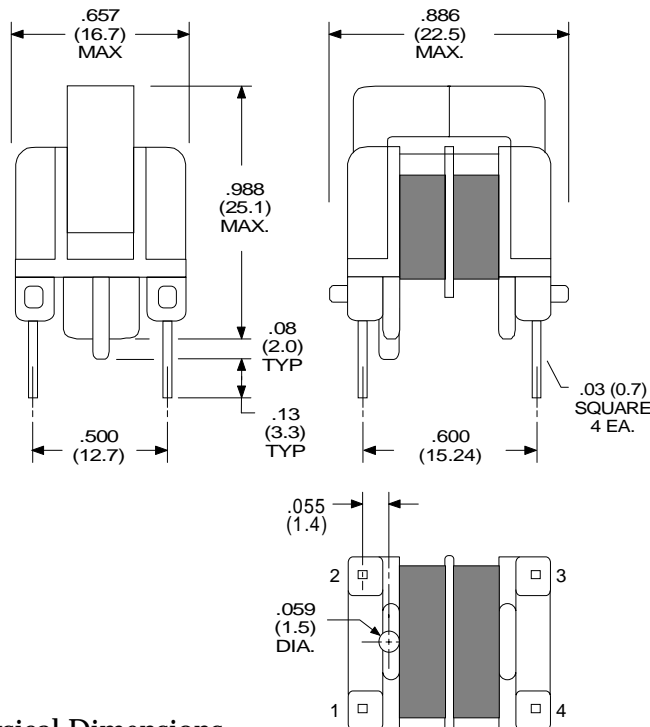

Physical Dimensions

inches (mm)

RHOMBUS P/N: **L-15606**

CUST P/N:

NAME:

DATE: **11/02/99**

SHEET: 1 OF 1