

# HR433.92

433.92MHz One-Port SAW Resonator

---



|              |
|--------------|
| Approved by: |
| Checked by:  |
| Issued by:   |

## SPECIFICATION

PRODUCT: SAW RESONATOR

---


MODEL: HR433.92 TO-39

---

**HOPE MICROELECTRONICS CO., LIMITED**

The HR433.92 is a true one-port, surface-acoustic-wave (SAW) resonator in a low-profile metal TO-39 case. It provides reliable, fundamental-mode, quartz frequency stabilization i.e. in transmitters or local oscillators operating at 433.920 MHz.

1.Package Dimension (TO-39)

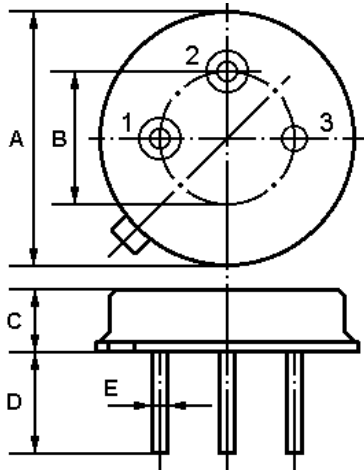

| Pin | Configuration  |
|-----|----------------|
| 1   | Input / Output |
| 2   | Output / Input |
| 3   | Case Ground    |


| Dimension | Data (unit: mm) |
|-----------|-----------------|
| A         | 9.30±0.20       |
| B         | 5.08±0.10       |
| C         | 3.40±0.20       |
| D         | 3±0.20 / 5±0.20 |
| E         | 0.45±0.20       |

2.Marking

HR433.92


Color: Black or Blue

3.Equivalent LC Model and Test Circuit

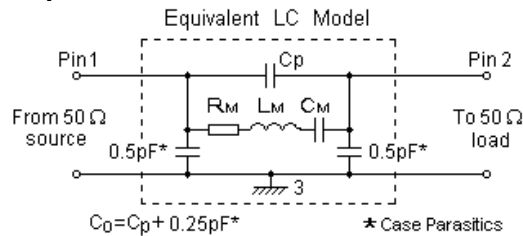


4.Typical Application Circuits


1) Low-Power Transmitter Application

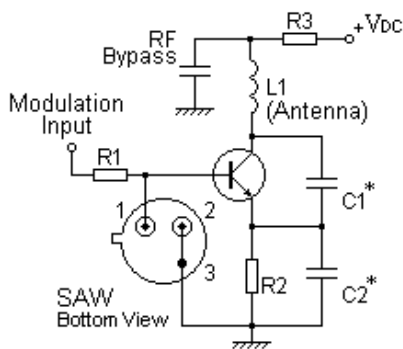


2) Local Oscillator Application

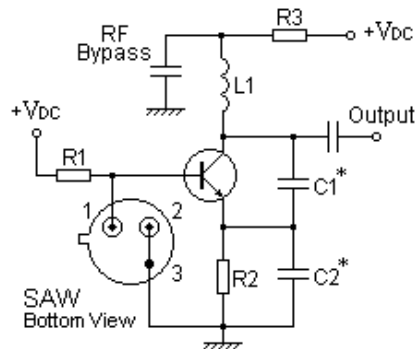

5.Typical Frequency Response

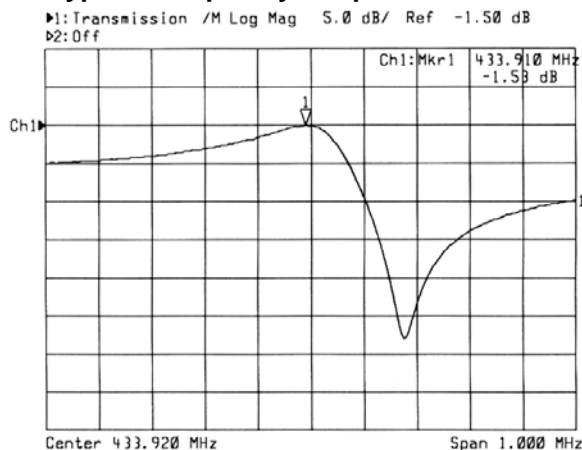

6.Temperature Characteristics

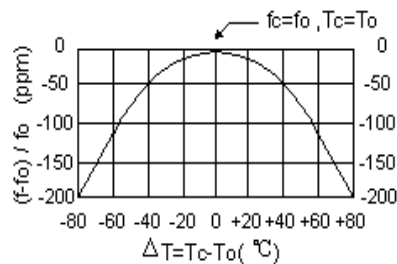

The curve shown above accounts for resonator contribution only and does not include oscillator temperature characteristics.

## 7.Performance

### 7-1.Maximum Ratings

| Rating                                   | Value      | Unit |
|--|------------|------|
| CW RF Power Dissipation $P$              | 0          | dBm  |
| DC Voltage Between Any two Pins $V_{DC}$ | $\pm 30$   | V    |
| Storage Temperature Range $T_{stg}$      | -40 to +85 |      |
| Operating Temperature Range $T_A$        | -10 to +60 |      |

### 7-2.Electronic Characteristics

| Characteristic                                |                                      | Sym          | Minimum | Typical  | Maximum | Unit       |
|---|--------------------------------------|--------------|---------|----------|---------|------------|
| Center Frequency (+25 °C)                     | Absolute Frequency                   | $f_C$        | 433.845 |          | 433.995 | MHz        |
|   | Tolerance from 433.920MHz            | $\Delta f_C$ |         | $\pm 75$ |         | kHz        |
| Insertion Loss                                |                                      | IL           |         | 1.8      | 2.4     | dB         |
| Quality Factor                                | Unloaded Q                           | $Q_U$        |         | 14,200   |         |            |
|   | 50 $\Omega$ Loaded Q                 | $Q_L$        |         | 2,650    |         |            |
| Temperature Stability                         | Turnover Temperature                 | $T_0$        | 25      |          | 55      |            |
|   | Turnover Frequency                   | $f_0$        |         | $f_c$    |         | kHz        |
|   | Frequency Temperature Coefficient    | FTC          |         | 0.032    |         | ppm/ °C    |
| Frequency Aging                               | Absolute Value during the First Year | $ f_A $      |         | 10       |         | ppm/yr     |
| DC Insulation Resistance Between Any Two Pins |                                      |              | 1.0     |          |         | M $\Omega$ |
| RF Equivalent RLC Model                       | Motional Resistance                  | $R_M$        |         | 23       | 32      | $\Omega$   |
|   | Motional Inductance                  | $L_M$        |         | 119.6139 |         | $\mu$ H    |
|   | Motional Capacitance                 | $C_M$        |         | 1.1258   |         | fF         |
|   | Pin 1 to Pin 2 Static Capacitance    | $C_0$        | 1.15    | 1.45     | 1.75    | pF         |

**ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!**

### C 2003. All Rights Reserved.

- The center frequency,  $f_C$ , is measured at the minimum IL point with the resonator in the 50  $\Omega$  test system.
- Unless noted otherwise, case temperature  $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$ .
- Frequency aging is the change in  $f_C$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- Turnover temperature,  $T_0$ , is the temperature of maximum (or turnover) frequency,  $f_0$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_0 [1 - \text{FTC} (T_0 - T_C)^2]$ .
- This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_0$  is the measured static (nonmotional) capacitance between Pin1 and Pin2. The measurement includes case parasitic capacitance.
- Derived mathematically from one or more of the following directly measured parameters:  $f_C$ , IL, 3 dB bandwidth,  $f_C$  versus  $T_C$ , and  $C_0$ .
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- For questions on technology, prices and delivery, please contact our sales offices or e-mail [sales@hoperf.com](mailto:sales@hoperf.com).