

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0192520152](#)
Status: **Active**
Overview: [wire management products](#)
Description: 287.02mm (11.300") UV Black Cable Tie, 50 Pound Tensile Strength, 100/Bag

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

| | |
|-------------------------------|---|
| Product Family | Accessories |
| Series | 19252 |
| Application Tooling Part Link | 192940002 |
| Comments | Maximum bundle diameter = 82.80mm (3.26"). Engineering Number N-11-50-0-C-LC |
| Component Type | Cable Tie |
| Overview | wire management products |
| Product Name | N/A |

Physical


| | |
|-------------------------------|-------|
| Circuits (Loaded) | N/A |
| Lock to Mating Part | None |
| Packaging Type | Bag |
| Temperature Range - Operating | 105°C |

Material Info

| | |
|-----------------|----------------|
| Old Part Number | N-11-50-0-C-LC |
|-----------------|----------------|

Reference - Drawing Numbers

| | |
|---------------|--------------|
| Sales Drawing | SD-19252-001 |
|---------------|--------------|

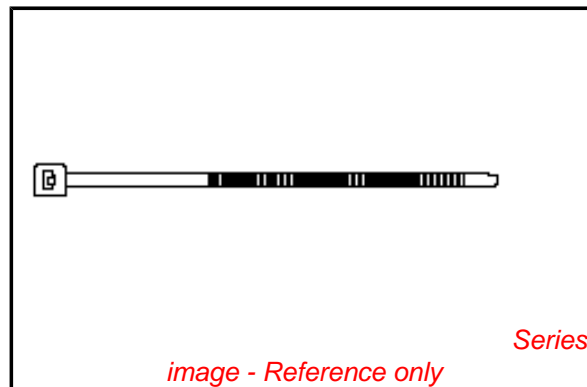

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[19252Series](#)

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

| Description | Product # |
|--|----------------------------|
| ServiceGrade™ Economy Cable Tie Tool | 0192940002 |



N-07-50-MH-9-C-XX

ⓓ

N = CABLE TIES

CABLE TIE LENGTH
INCHES
(ROUNDED)

TENSILE STRENGTH
18 = 18 LBS
40 = 40 LBS
50 = 50 LBS
120 = 120 LBS

TIE TYPE
(BLANK) = STANDARD TIE
ID = IDENTIFICATION
MH = MOUNTING HOLE

INTERNAL DESIGNATOR

AMOUNT PER PACKAGE
C = 100
D = 500
M = 1000

COLORS
0 = UV BLACK
9 = NATURAL
30 = HEAT STABILIZED

SALES DRAWING

| | | | | | | | |
|--|-----------------|---|----------------------|---|----------------------|---|------------------------------|
| REMOVE BASE INFO EC NO: ETC2007-0295 DRWN: TBOANN02007/02/13 CHKD: JMACNEIL 2007/02/13 APPR: JMACNEIL 2007/02/14 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | | SCALE NTS | DESIGN UNITS INCH | THIRD ANGLE PROJECTION | REVISE ON CAD ONLY |
| | DESCRIPTION | mm | INCH | DIMENSION STYLE IN/MM | | TITLE | |
| | ▽ = 0 | 4 PLACES ± --- ± --- | 3 PLACES ± --- ± --- | DRAWN BY B.ENDERL | DATE 04/05/11 | 19252 SERIES ENGINEERING NUMBERS CABLE TIES | |
| | ∇ = 0 | 2 PLACES ± --- ± --- | 1 PLACE ± --- ± --- | CHECKED BY H.BEITZL | DATE 04/05/11 | MOLEX INCORPORATED | |
| REV | | ANGULAR ± ---° | | APPROVED BY R.DEROSS | DATE 04/05/11 | MATERIAL NO. SEE CHART | DOCUMENT NO. SD-19252-001 |
| | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | SHEET NO. 1 OF 1 |