

Features

- Meets VRM 10.1 and 10.2 Requirements
- DAC Programmable Output Voltage
- Power Good Output
- Differential Remote Sense
- Remote Enable
- Supervisory Functions
 - Output Overcurrent
 - Short Circuit Protection
 - Overtemperature Indicator
 - Output Current Level Signal
- Tri-state Output when Disabled
- Dynamic VID Capability
- 1U Form Factor (1.250" total mating height)



Table 1:

Input Characteristics	Notes and Conditions (1)	Min	Typ	Max	Units
Input Voltage Operating Range		11.04	12.0	12.60	Vdc
Input Undervoltage Lockout	Turn-on Threshold	6.5	6.9	7.3	Vdc
	Turn-off Threshold	5.4	6.0	6.6	Vdc
	Hysteresis Voltage	0.7	0.9	1.1	Vdc
Maximum Input Current VRM 10.1 Levels	Typical: 105A 1.325VID Max: 120A 1.6VID		13	18	A
Maximum Input Current VRM 10.2 Levels	Typical: 130A 1.325VID Max: 150A 1.6VID		15.3	21	A
No-Load Input Current	Enable state, no Load	200	320	400	mA
Disabled Input Current	Disabled State	20	30	50	mA
Enable - Positive Logic Version	On State Range	0.8		Vin	Vdc
	Off State Range	-0.3		0.4	Vdc
LL0 and LL1	High State Range	0.8		3.5	Vdc
	Low State Range	-0.3		0.4	Vdc

Table 2:

Output Characteristics	Notes and Conditions (1)	Min	Typ	Max	Units
Output Voltage Set Point	6-Bit DAC Controlled	0.8375		1.600	Vdc
Output Line Regulation		-5	0	5	mV
Output Load Regulation	Fixed		1.25		mΩ
Output Voltage Total Regulation				VID-40	mV
Output Ripple Voltage & Noise (2)	20 MHz Bandwidth		6.4		mVp-p
Output Current Operating Range		0		150	A
Efficiency for 10.1 TDP	Io = 105 Amps VID = 1.325	86	87		%
Efficiency for 10.2 TDP	Io = 130 Amps VID = 1.325	84	85.5		%
Turn-on Time	Vin present: Enable to 90% Vout			50	mS

Table 2:

Output Characteristics	Notes and Conditions (1)	Min	Typ	Max	Units
Transient Response (3)	100A step, 100A/μS, ΔVo, Adjustable	115		135	mV
Remote Sense Compensation Range (4)				300	mV
Recommended Bulk Output Capacitance for 10.1 Applications	UCC 4PS560MH11 or equivalent		14		EA
Recommended Bulk Output Capacitance for 10.2 Applications	UCC 4PS560MH11 or equivalent		16		EA

Table 3:

Protection Characteristics	Notes and Conditions (1)	Min	Typ	Max	Units
Output Overcurrent Shutdown	Latching	155		210	A
Overvoltage Shutdown	Latching, Above VID	90		200	mV
Overtemperature Indicator	Non-Latching, at hot spots Worst case junction temperature		125		°C
Load Indicator	VID = 1.325, 0A Load VID = 1.325, 100A Load		1 3.75		V

Table 4:

General Characteristics	Notes and Conditions (1)	Min	Typ	Max	Units
Storage Temperature Range	Non-condensing	-40		70	°C
Operating Temperature Range		0		60	°C
Semiconductor Junction Temperature	Package rated to 150°C			115	°C
Material Flammability	UL 94V-0				
MTBF	Calculated (RAC PRISM) 45°C		1.10		x10 ⁶ Hrs
	Demonstrated				x10 ⁶ Hrs
Switching Frequency	Per phase		300		KHz
Dimensions	3.8"L x 1.18"H x 1.0"W				
Weight			59		g

Table 5:

Adaptive Voltage Positioning	Notes and Conditions (1)	Min	Typ	Max	Units
Voltage Droop for 100A Load (linear)	LL0 = X, LL1 = X		125		mV

Notes:

1. Vin = 12Vdc, Ta = 25°C, Airflow = 400LFM unless otherwise noted.
2. Output Ripple Voltage is specified when measured with Intel specified capacitance at the output of the converter.
3. Transient response is specified with Intel specified capacitors at the output of the converter.
4. If remote sense is not required or used, the Sense(+) and Sense(-) pins must be connected to Vo(+) and Vo(-) respectively.
5. LL0, LL1 gives 1.25mOhm Load Line only.
6. VRM_PRES and VRM_ID are connected to Vss on the VRM.

Mechanical Information

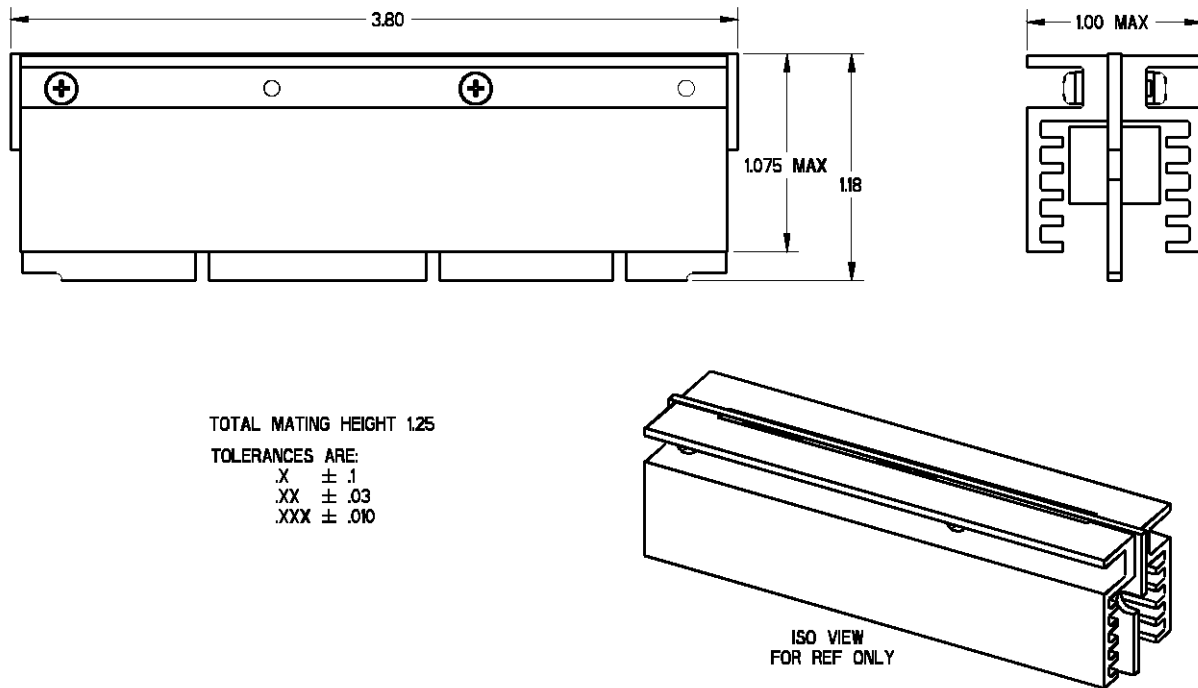



Figure 1

Recommended Interface Connector Options

- | | |
|------------|-------------------------------------|
| Tyco/Elcon | 283-0172-01303 (Solder Tail, Long) |
| | 283-0172-02303 (Solder Tail, Short) |
| | 284-0202-03003 (Surface Mount) |

Pin Assignment


1	VSS
2	VSS
3	VSS
4	VID4
5	VID2
6	VID0
7	Vo_sen+
8	PWRGD
9	OUTEN
10	Load Current
11	N/C
(6) 12	VRM_PRES
13	VO+
14	VO+
15	VO+
16	VSS
17	VSS
18	VSS
19	VO+
20	VO+
21	VO+
22	VSS
23	VSS
24	VSS
25	VO+
26	VO+
27	VO+

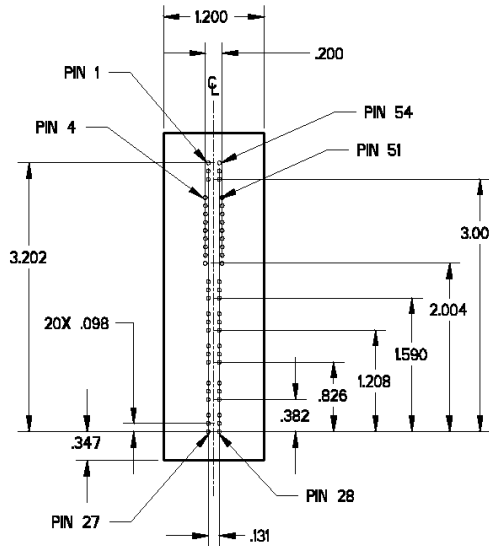


54	VIN+
53	VIN+
52	VIN+
51	VID3
50	VID1
49	VID5
48	VO_SEN-
47	VR_HOT
46	LL0
45	LL1
44	N/C
43	VRM_ID
(6) 42	VO+
41	VO+
40	VO+
39	VSS
38	VSS
37	VSS
36	VO+
35	VO+
34	VO+
33	VSS
32	VSS
31	VSS
30	VO+
29	VO+
28	VO+

NOTE :
CHECK WITH MANUFACTURER FOR RECOMMENDED PCB LAYOUT.

Thermal Derating Curves

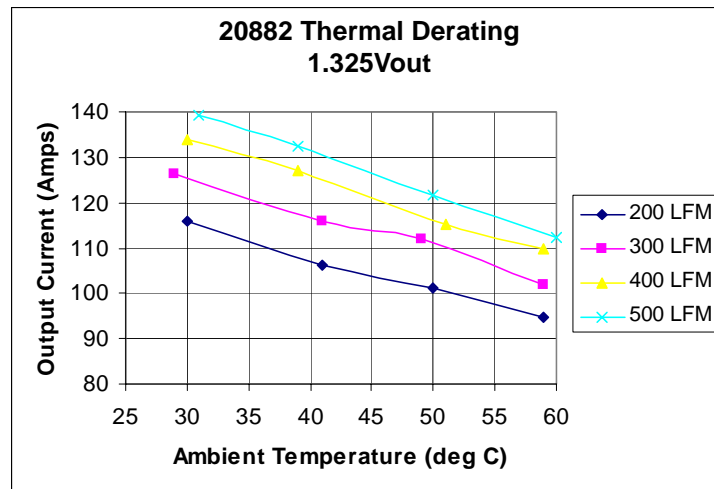

Ordering Information

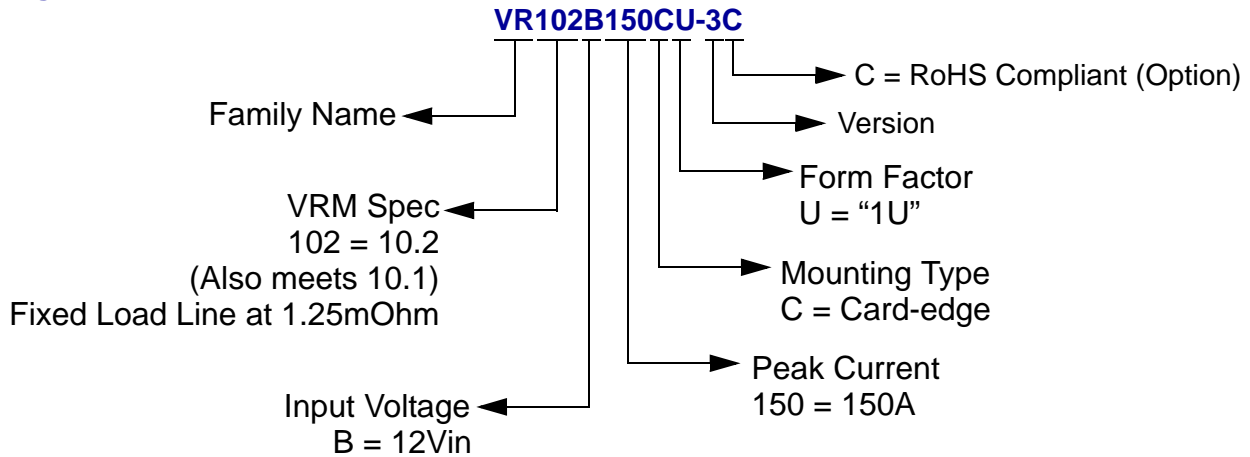

RoHS Compliancy

The **VR102B150CU-3C** is in compliance with the European Union Directive 2002/95/EC (RoHS) with respect to the following substances: lead (Pb), cadmium (Cd), mercury (Hg), hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

RoHS Process Note

This product is not intended to go through a reflow solder process. See recommended interface options.

C&D Technologies, Inc. reserves the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our website to ensure that you have the current and complete specification for your product before use.

© C&D Technologies, Inc. 2004

No part of this publication may be copied, transmitted, or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies, Inc.

Instructions for use are available from: www.cd4power.com

4118 14th Avenue, Unit 4
Markham, Ontario L3R 0J3
1-905-944-2850

www.cd4power.com

4607 S.E. International Way
Milwaukie, Oregon 97222
1-971-206-2800