

圖名 (DRAW NAME)

1.0 mm NON ZIF DOUBLE CONTACT FOR SMT TYPE

圖號 (DRAW NUMBER)

BL118 SERIES STRAIGHT 180°

圖檔 (FILE NAME *.DWG)



BL118 STRAIGHT 180° CONTACT

PERFORMANCE CHARACTERISTICS


CURRENT: 0.5A
 OPERATING TEMPERATURE: -40°C TO 105°C
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
 DIELECTRIC STRENGTH: 500 VAC MIN.

MATERIAL

HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0
 CONTACT: COPPER ALLOYS; TIN PLATED OVER NICKEL

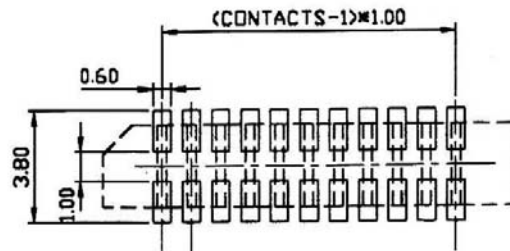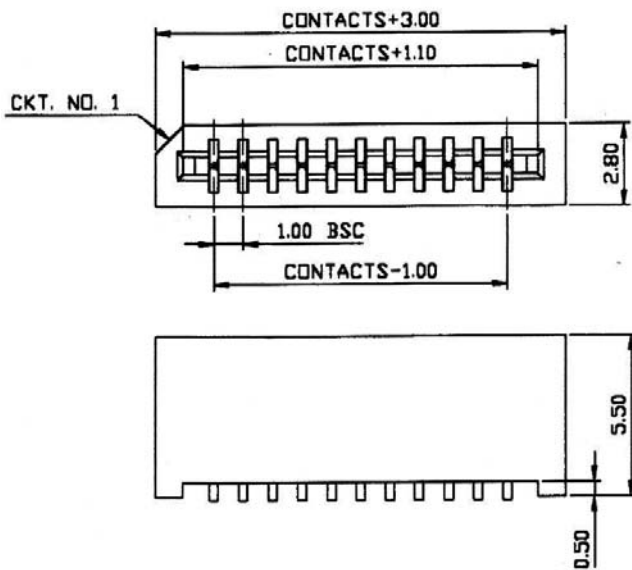

RECOMMENDED PCB LAYOUT

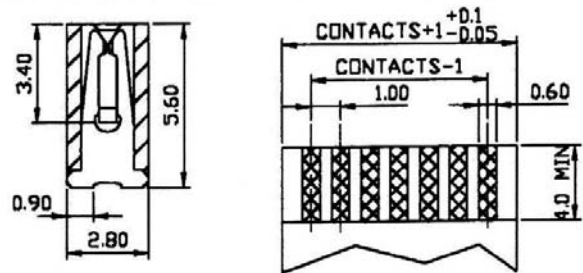

FPC/FFC t=0.30±0.05

UNIT : mm

ORDERING INFORMATION

BL118 011 S

PRODUCT SERIES

1.00mm NON ZIF
DOUBLE CONTACT
FOR SMT TYPE

STRAIGHT 180°

NUMBER OF CONTACTS

04P TO 30P

