



ARS25 / AR25 SERIES

**25.0 AMPS. HIGH CURRENT
PLASTIC SILICON
RECTIFIERS**

**Voltage Range
50 to 1000 VOLTS
Current
25.0 Amperes**


Features

- Plastic material used carries Underwriters
- Laboratory Classification 94V-0
- Low cost construction utilizing void-free molded plastic technique
- Low cost
- Diffused junction
- Low leakage
- High surge capability
- High temperature soldering guaranteed:
250°C for 10 seconds



Mechanical Data

- Cases: Molded plastic case
- Terminals: Plated terminals, solderable per MIL-STD-202, Method 208
- Polarity: Color ring denotes cathode end
- Weight: 0.07 ounce, 1.8 grams
- Mounting position: Any

ARS



AR

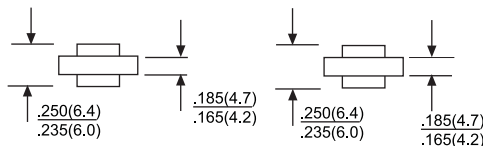

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number		ARS 25005	ARS 2501	ARS 2502	ARS 2504	ARS 2506	ARS 2508	ARS 2510	UNITS
		AR25005	AR2501	AR2502	AR2504	AR2506	AR2508	AR2510	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ T _c = 150°C	I _{F(AV)}	25							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) at T _J = 150°C	I _{FSM}	400							A
Maximum Instantaneous Forward Voltage @ 25A	V _F	1.0							V
Maximum DC Reverse Current @ T _c = 25°C at Rated DC Blocking Voltage @ T _c = 100°C	I _R	5.0 250							uA uA
Typical Reverse Recovery Time (Note 2)	T _{RR}	3.0							uS
Typical Junction Capacitance (Note 1) T _J = 25°C	C _J	300							pF
Typical Thermal Resistance (Note 3)	R _{θJC}	1.0							°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +175							°C

- NOTES: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
2. Reverse Recovery Test Conditions: I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A
3. Thermal Resistance from Junction to Case, Single Side Cooled.

RATING AND CHARACTERISTIC CURVES ARS25 /AR25 SERIES



FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

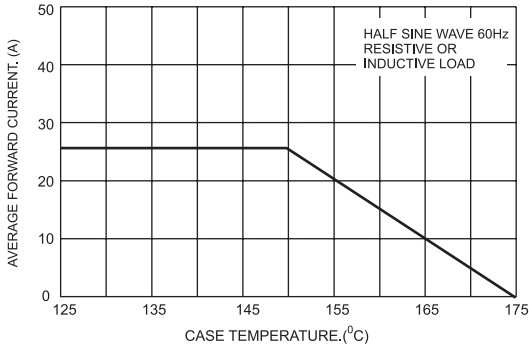


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

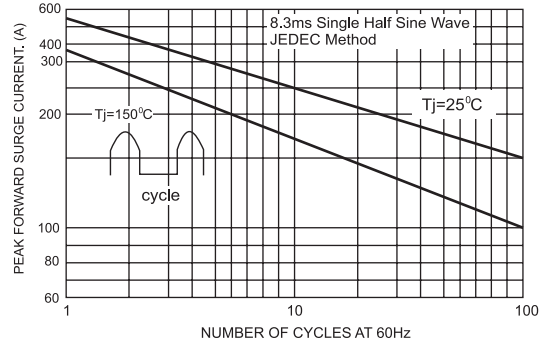


FIG.3- TYPICAL FORWARD CHARACTERISTICS

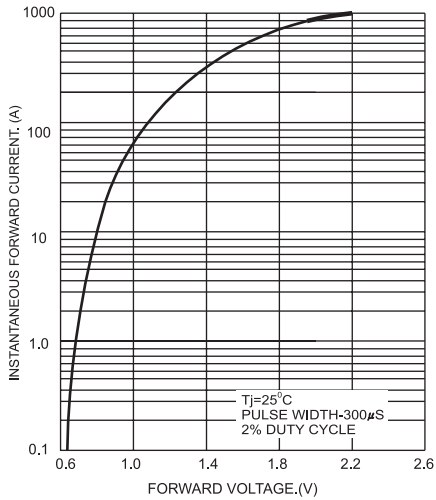


FIG.4-TYPICAL REVERSE CHARACTERISTICS

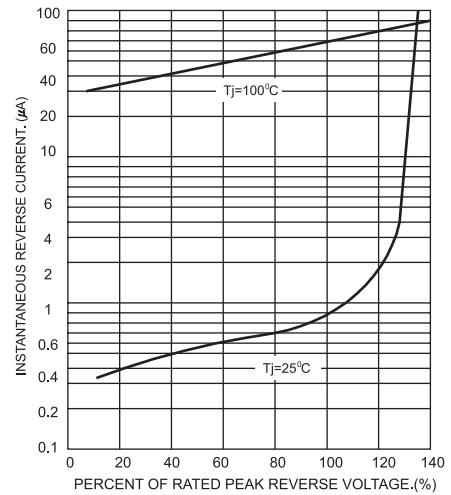


FIG.5- TYPICAL JUNCTION CAPACITANCE

