


GLASS HIGH EFFICIENCY RECTIFIERS	REVERSE VOLTAGE - 50 to 1000 Volts FORWARD CURRENT - 1.0 Amperes
---	---

FEATURES

- Low cost
- Diffused junction
- Ultra fast switching for high efficiency
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0

MECHANICAL DATA

- Case: JEDEC DO-41 molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.012 ounces , 0.34 grams
- Mounting position: Any

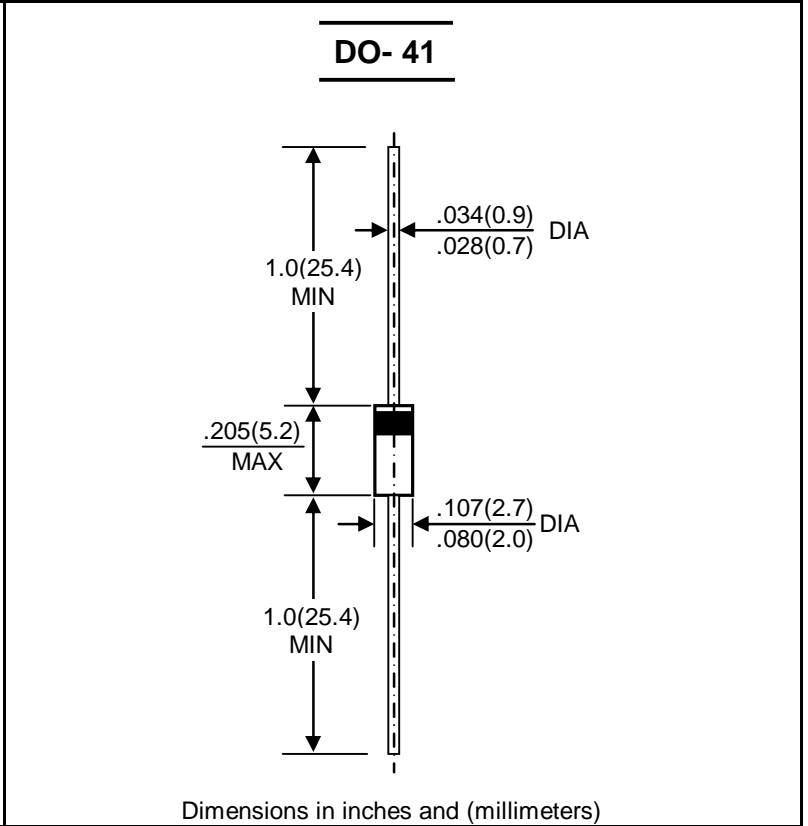

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	HER 101G	HER 102G	HER 103G	HER 104G	HER 105G	HER 106G	HER 107G	HER 108G	UNIT	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V	
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	580	700	V	
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V	
Maximum Average Forward Rectified Current @T _A =55 °C	I _(AV)	1.0								A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I _{FSM}	30								A	
Peak Forward Voltage at 1.0A DC(Note1)	V _F	1.0			1.3		1.7			V	
Maximum DC Reverse Current @T _J =25 °C at Rated DC Blocking Voltage @T _J =100 °C	I _R	5.0								uA	
Maximum Reverse Recovery Time(Note 1)	T _{RR}	50					75				nS
Typical Junction Capacitance (Note2)	C _J	20					10				pF
Typical Thermal Resistance (Note3)	R _{θJA}	25								°C/W	
Operating Temperature Range	T _J	-50 to +150								°C	
Storage Temperature Range	T _{STG}	-50 to +150								°C	

NOTES: 1.Measured with I_F=0.5A,I_R=1A,I_{RR}=0.25A.
 2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC
 3.Thermal resistance junction of ambient.

FIG. 1 – FORWARD CURRENT DERATING CURVE

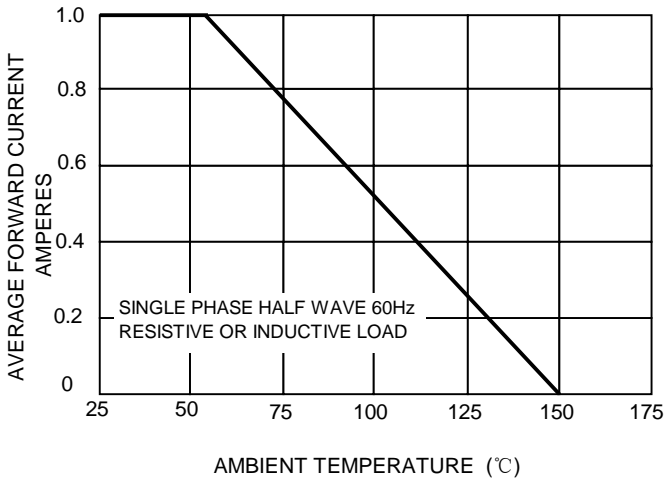


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

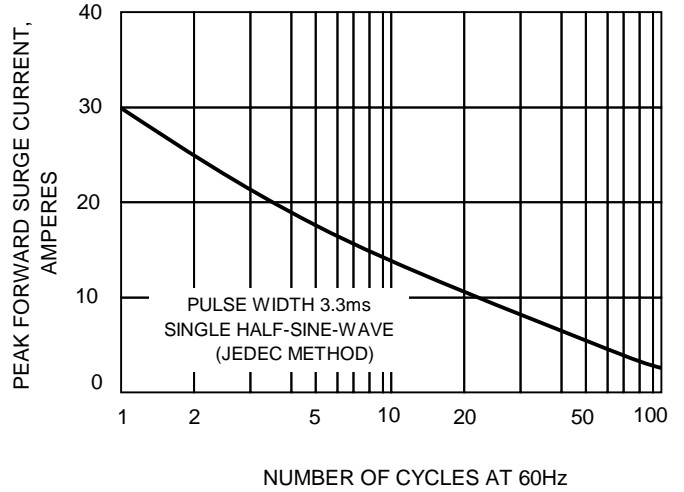


FIG.3 – TYPICAL JUNCTION CAPACITANCE

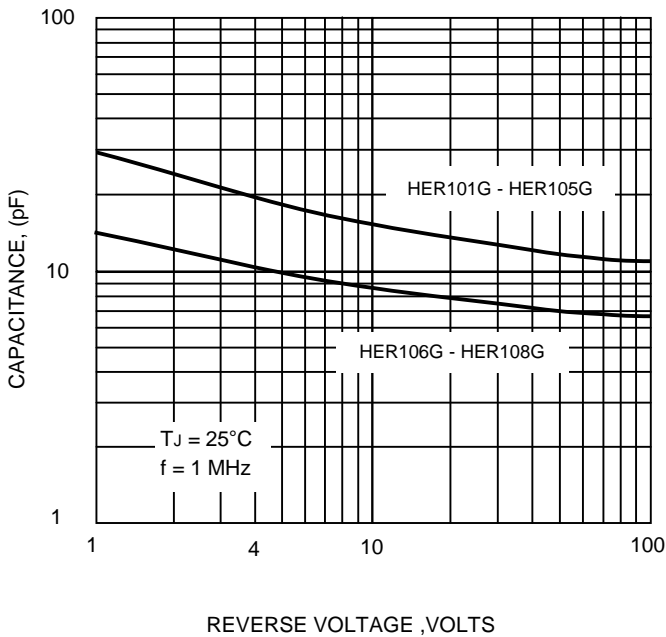


FIG.4-TYPICAL FORWARD CHARACTERISTICS

