


Description

The APX4558 device is a dual low noise operational amplifier. The wide bandwidth and low noise make it very suited to audio applications.

The device is short-circuit protected, and the internal frequency compensation ensures stability without external components.

Pin Assignments

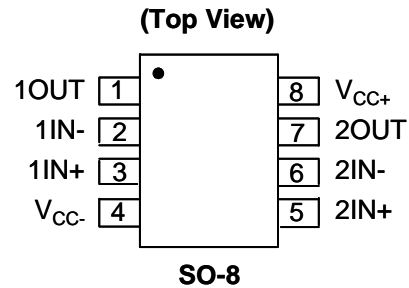

Features


- Unity-Gain Bandwidth . . . 3 MHz typical
- Gain and Phase match between amplifiers
- Low Noise . . . 8 nV/ $\sqrt{\text{Hz}}$ typical at 1 kHz
- Wide Common-Mode and Differential voltage ranges
- No frequency compensation required
- Low power consumption
- No latch-up
- Green mold compound (No Br, Sb) (Note 1)

Applications

- Audio pre amps
- RCA line out buffers

Notes: 1. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied. Please visit our website at http://www.diodes.com/products/lead_free.html.

Schematic Diagram

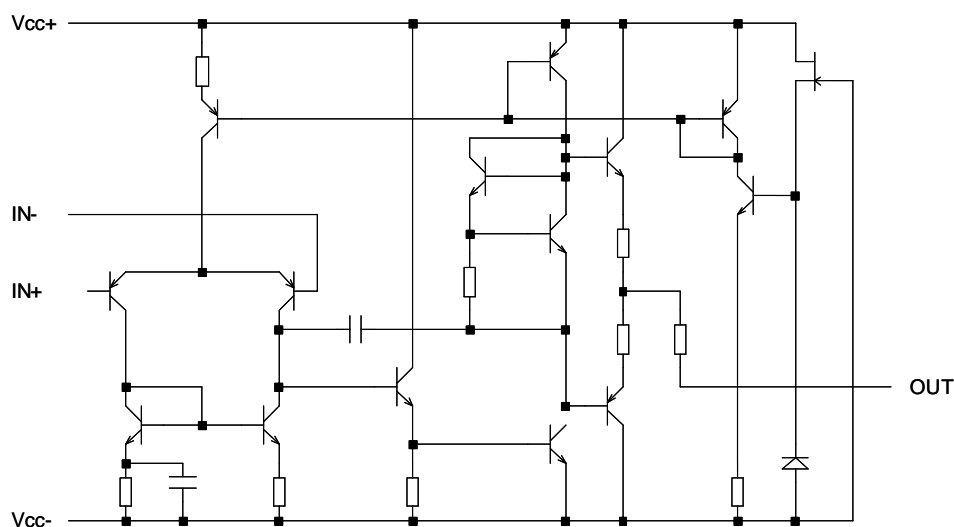

Pin Descriptions

| Pin # | Name | Description |
|-------|------------------|--|
| 1 | 1OUT | Amplifier 1 output |
| 2 | 1IN- | Amplifier 1 inverting input |
| 3 | 1IN+ | Amplifier 1 non-inverting input |
| 4 | V _{CC-} | Negative supply pin for amplifier 1 and amplifier 2 |
| 5 | 2IN+ | Amplifier 2 non-inverting input |
| 6 | 2IN- | Amplifier 2 inverting input |
| 7 | 2OUT | Amplifier 2 output |
| 8 | V _{CC+} | Positive supply pin for amplifier 1 and amplifier 2. |

Absolute Maximum Ratings (Note 2)

| Symbol | Parameter | Rating | Unit |
|------------------|--|------------|------|
| V _{CC+} | Supply voltage (Note 3) | 18 | V |
| V _{CC-} | | -18 | |
| V _{ID} | Differential input voltage (Note 4) | ±30 | V |
| V _I | Input voltage (any input) (Note 3, 5) | ±15 | V |
| | Duration of output short circuit to ground, one amplifier at a time (Note 6) | Unlimited | |
| T _J | Junction Temperature (Note 7) | 150 | °C |
| T _{STG} | Storage Temperature | -65 to 150 | °C |

- Notes:
- Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
 - All voltage values, unless otherwise noted, are with respect to the midpoint between V_{CC+} and V_{CC-}.
 - Differential voltages are at IN+ with respect to IN-.
 - The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
 - Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.
 - Maximum power dissipation is a function of T_J (max), θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is P_D = (T_J (max) - T_A)/θ_{JA}. Operating at the absolute maximum T_J of 150°C can affect reliability.

Recommended Operating Conditions





| Symbol | Parameter | | Min | Max | Unit |
|------------------|-------------------------|----------|-----|-----|------|
| V _{CC+} | Supply voltage (Note 3) | | 5 | 15 | V |
| V _{CC-} | | | -5 | -15 | |
| T _A | Operating Ambient | APX4558 | 0 | 70 | °C |
| | Temperature Range | APX4558I | -40 | 105 | |

Electrical Characteristics ($V_{CC\pm} = \pm 15V$, $T_A = 25C$, unless otherwise stated)





| Symbol | Parameter | Conditions | T_A | Min | Typ. | Max | Unit |
|--|---|--|-----------|----------|------------------|-----|-----------------|
| AC Characteristics | | | | | | | |
| V_{IO} | Input offset voltage | $V_O = 0V$ | 25°C | | 0.5 | 6 | mV |
| | | | Full temp | | | 7.5 | |
| I_{IO} | Input offset current | $V_O = 0V$ | 25°C | | 5 | 200 | nA |
| | | | Full temp | | | 300 | |
| I_{IB} | Input bias current | $V_O = 0V$ | 25°C | | 150 | 500 | nA |
| | | | Full temp | | | 800 | |
| V_{ICR} | Common-mode input voltage range | | 25°C | ± 12 | ± 14 | | V |
| V_{OM} | Maximum output voltage swing | $R_L = 10k\Omega$ | 25°C | ± 12 | ± 14 | | V |
| | | | 25°C | ± 10 | ± 13 | | |
| | | | Full temp | ± 10 | | | |
| A_{VD} | Large-signal differential voltage amplification | $R_L \geq 2k\Omega$ $V_O = \pm 10V$ | 25°C | 20 | 300 | | V/mV |
| | | | Full temp | 15 | | | |
| R_{IN} | Input resistance | | 25°C | 0.3 | 5 | | M Ω |
| CMRR | Common-mode rejection ratio | $V_{IN} = V_{ICR(Min)}$ | 25°C | 70 | 90 | | dB |
| PSRR | Power supply rejection ratio | $V_{CC\pm} = \pm 15V$ to $\pm 9V$ | 25°C | 76 | 90 | | dB |
| I_{CC} | Supply current both amplifiers | $V_O = 0V$, No load | 25°C | | 2.5 | 5.6 | mA |
| | | | T_A min | | 3 | 6.6 | |
| | | | T_A max | | 2.3 | 5 | |
| AC Characteristics | | | | | | | |
| B_1 | Unity-gain bandwidth | | 25°C | | 3 | | MHz |
| SR | Slew rate at unity gain | $V_I = \pm 10V$, $R_L = 2k\Omega$, $C_L = 100pF$ | 25°C | 1.1 | 1.7 | | V/ μs |
| v_n | Equivalent input noise voltage (closed loop) | $G=100$, $R_S = 100\Omega$ $F = 1kHz$, $BW = 1Hz$ | 25°C | | 8 | | nV/ \sqrt{Hz} |
| V_{O1}/V_{O2} | Crosstalk attenuation | Open loop $G = 100$ | 25°C | | $R_S = 1k\Omega$ | 85 | dB |
| | | | | | $f = 10kHz$ | 105 | |
| t_r | Rise time overshoot | $V_I = 20mV$, $R_L = 2k\Omega$, $C_L = 100pF$ | 25°C | | 0.13 | | μs |
| | | | 25°C | | 5 | | % |
| Power and Thermal Characteristics | | | | | | | |
| P_D | Total power dissipation both amplifiers | $V_O = 0V$, No load | 25°C | | 75 | 170 | mW |
| | | | T_A min | | 90 | 200 | |
| | | | T_A max | | 70 | 150 | |
| θ_{JA} | Thermal Resistance Junction-to-Ambient | SO-8 (Note 8) | | | 130 | | °C/W |
| θ_{JC} | Thermal Resistance Junction-to-Case | SO-8 Note 8) | | | 15 | | °C/W |

Notes: 8. Test condition for SO-8: Device mounted on FR-4 substrate PC board, with minimum recommended pad layout
9. Full temp is specified as 0 to 70°C for the APX4558 and -40 to 105°C for the APX48558I





Typical Performance Characteristics

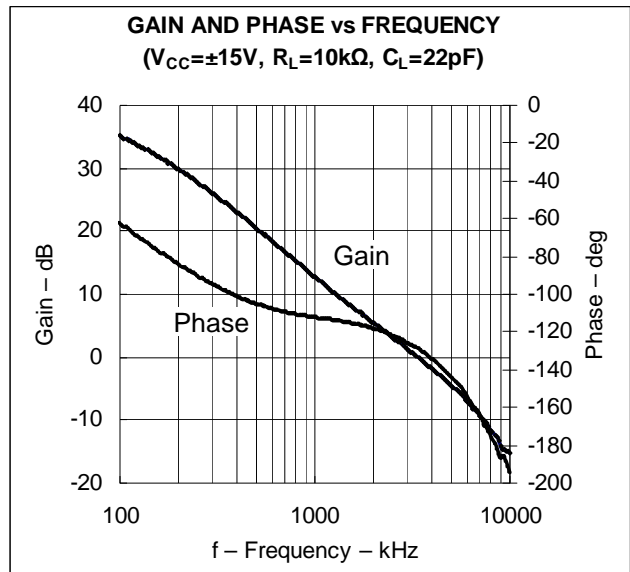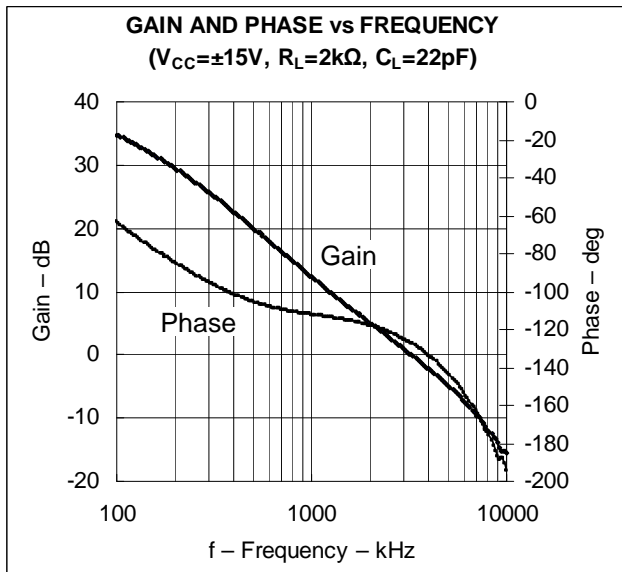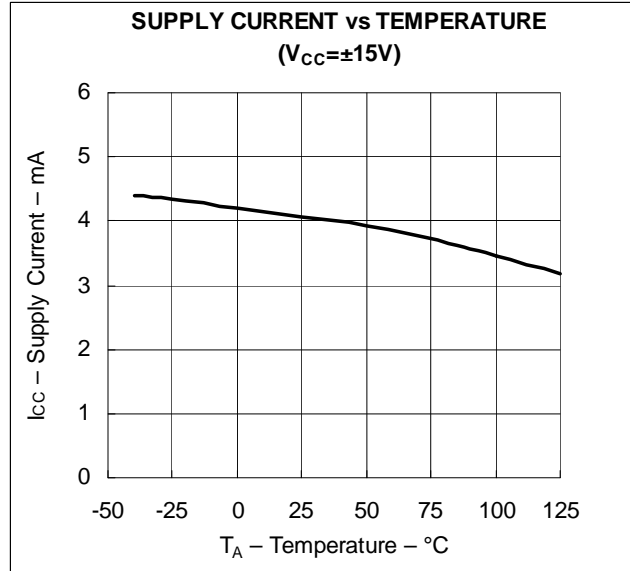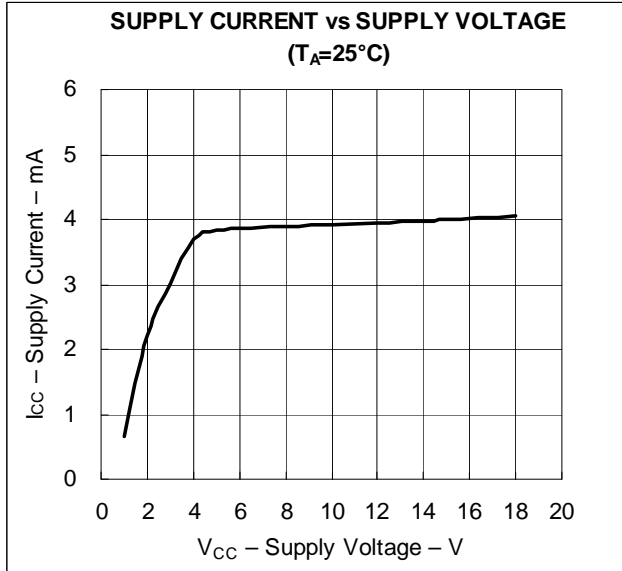


Typical Performance Characteristics (Continued)

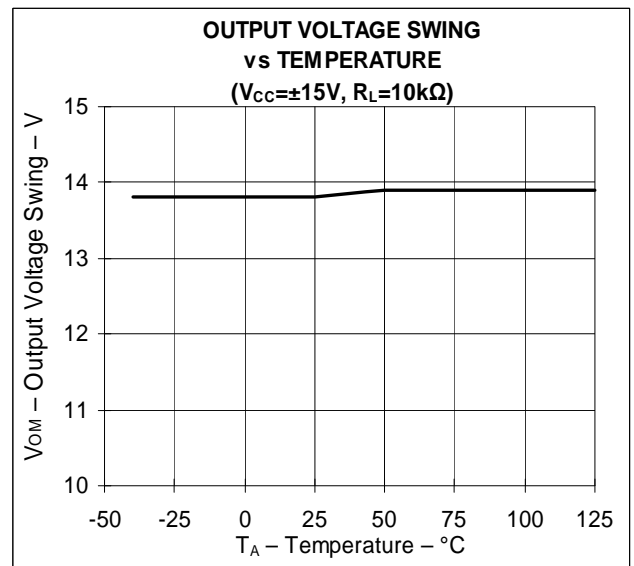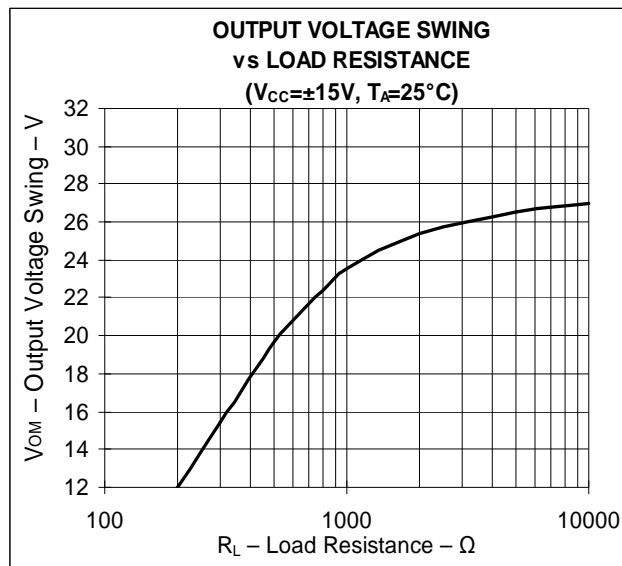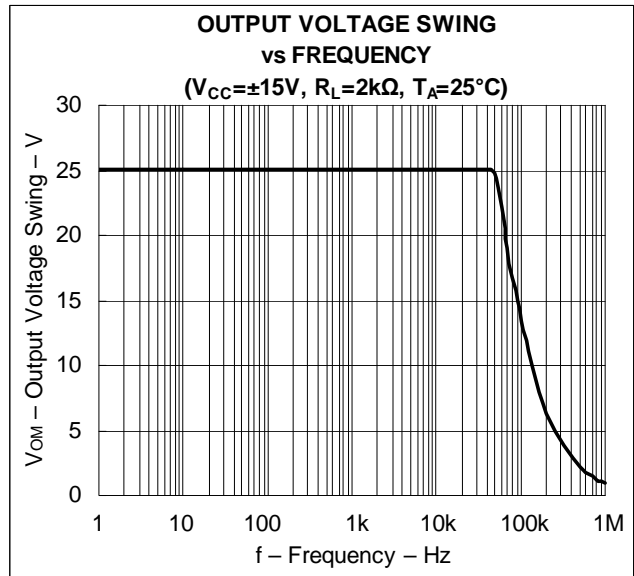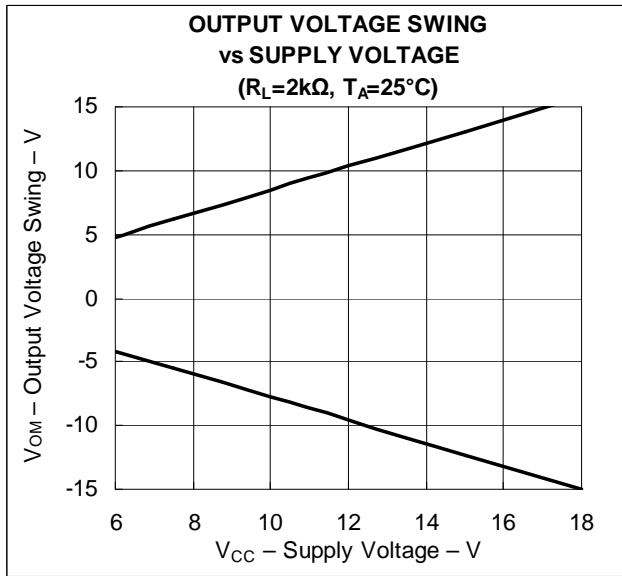

Typical Performance Characteristics (Continued)

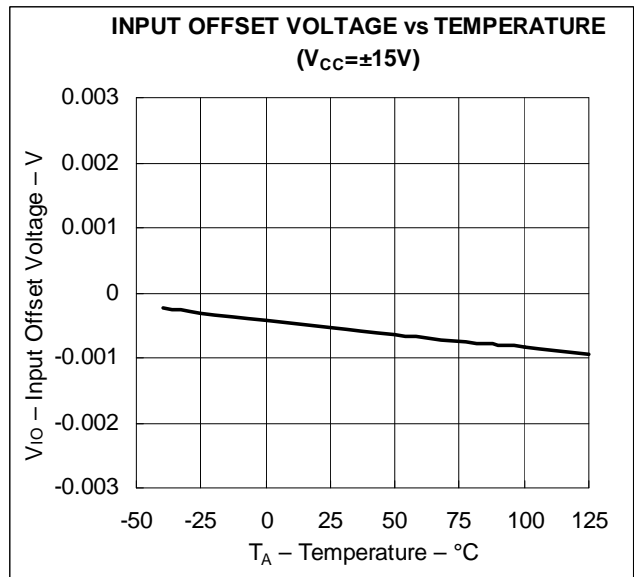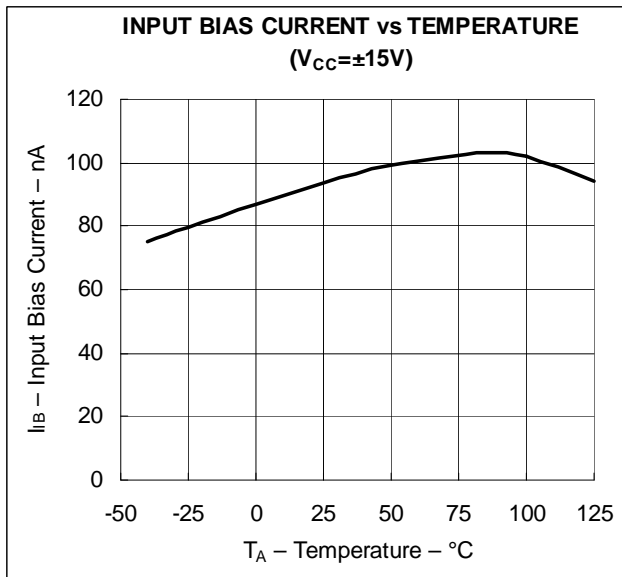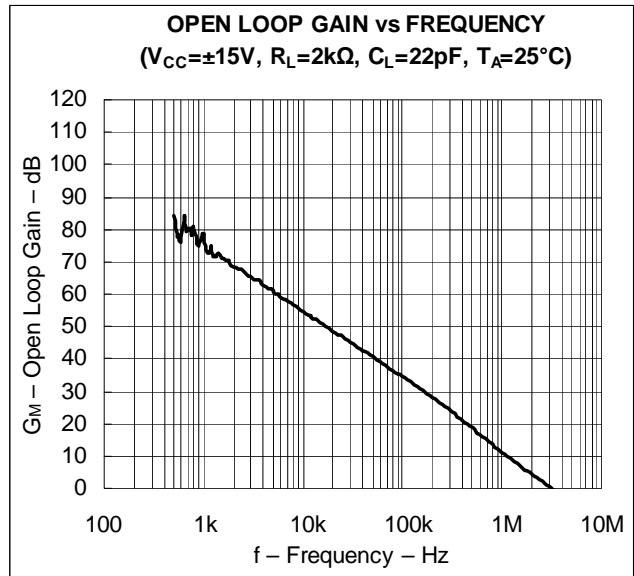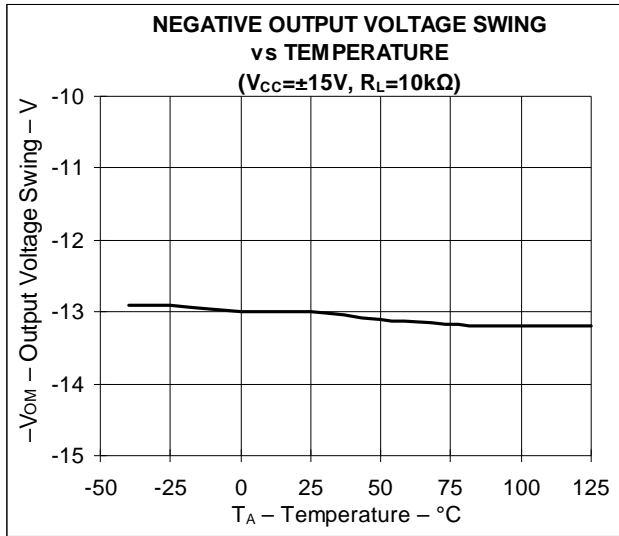


Typical Performance Characteristics (Continued)

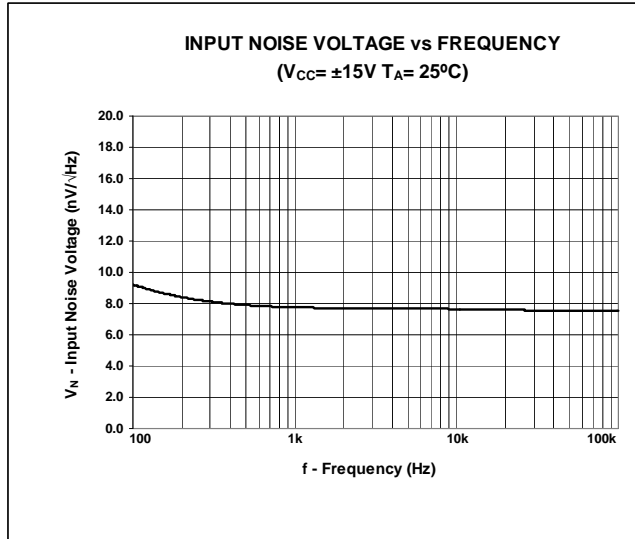

NEW PRODUCT

Ordering Information

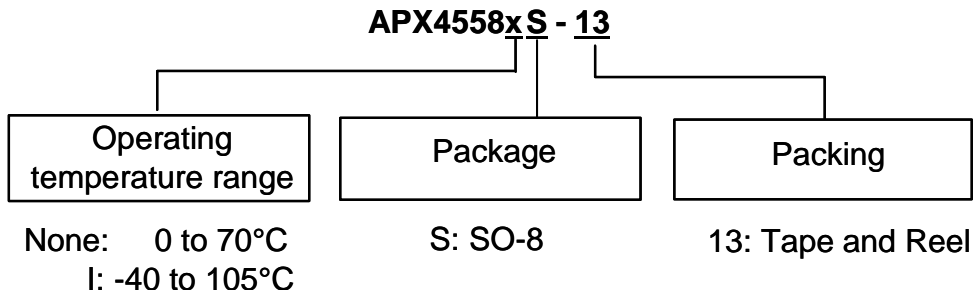


| Device | Package Code | Packaging (Note 10) | 13" Tape and Reel | |
|--------------|--------------|---------------------|-------------------|--------------------|
| | | | Quantity | Part Number Suffix |
| APX4558S-13 | S | SO-8 | 2500/Tape & Reel | -13 |
| APX4558IS-13 | S | SO-8 | 2500/Tape & Reel | -13 |



Notes: 10. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

Marking Information


SO-8

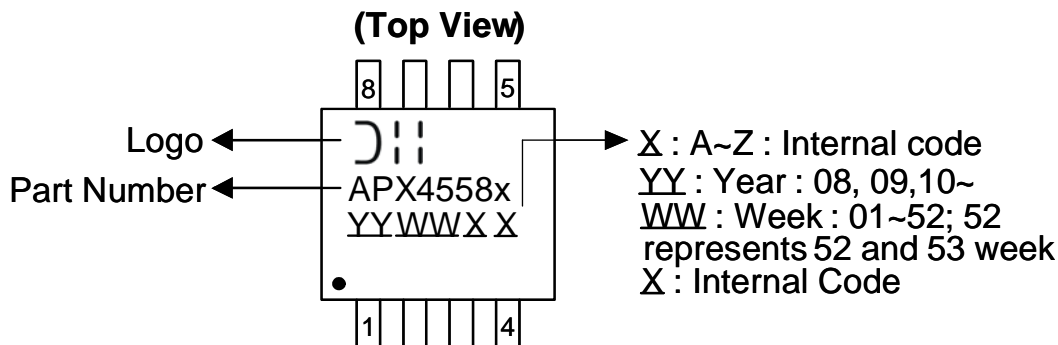

NEW PRODUCT

Package Outline Dimensions (All Dimensions in mm)

SO-8

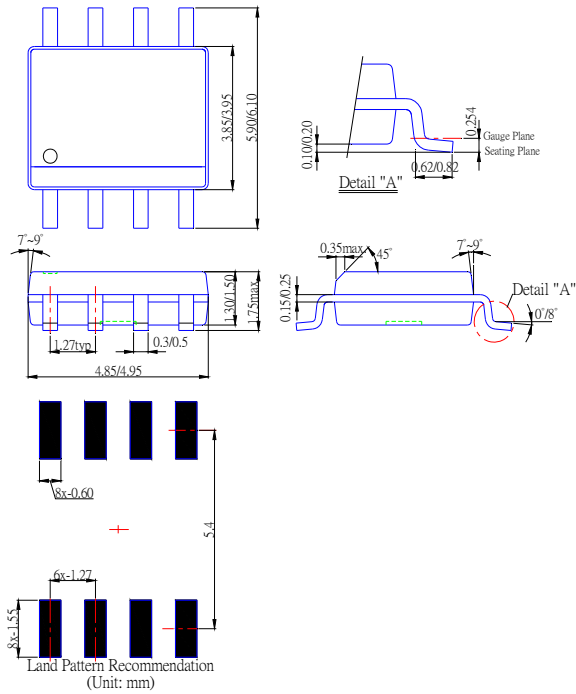

NEW PRODUCT

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2011, Diodes Incorporated

www.diodes.com