


SMX-1C-A SMX-1C-B SMX-1C-C

Full ceramic SMD Crystal


QuartzCom
the communications company





Features

- Applications: telecommunications, audio, automotive, instruments
- Small package size
- Reliable, low cost crystal
- Reflow soldering @ 260 °C

Parameter	Specification	
Frequency range	6 ~ 50 MHz 40 ~ 84 MHz	fundamental 3 rd overtone
Mode of oscillation	AT-cut	
Standard frequencies	6.00, 8.00, 10.00, 12.00, 20.00, 32.00 & 121.4000 MHz	
Frequency tolerance	±25 ~ ±50 ppm	@ +25 °C
Frequency stability	±10 ~ ±50 ppm	vs. operating temperature range
Aging	±2 ppm	1 st year
Load capacitance	series or parallel resonance (CL = 8 ~ 32 pF)	
Equivalent series resistance (ESR)	< 25 Ω < 15 Ω	@ 8 MHz @ 32 MHz
Drive level	10 ~ 100 μW	
Operating temperature range	-20 ~ +70 °C -40 ~ +85 °C -40 ~ +125 °C	commercial application industrial application automotive application
Storage temperature range	-55 ~ +125 °C	
Packaging unit	tape & reel	1'000 pieces
Customer specifications on request		

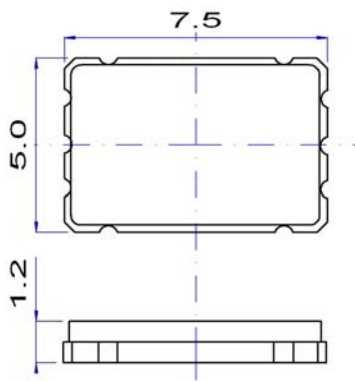

Example for IR reflow soldering temperature

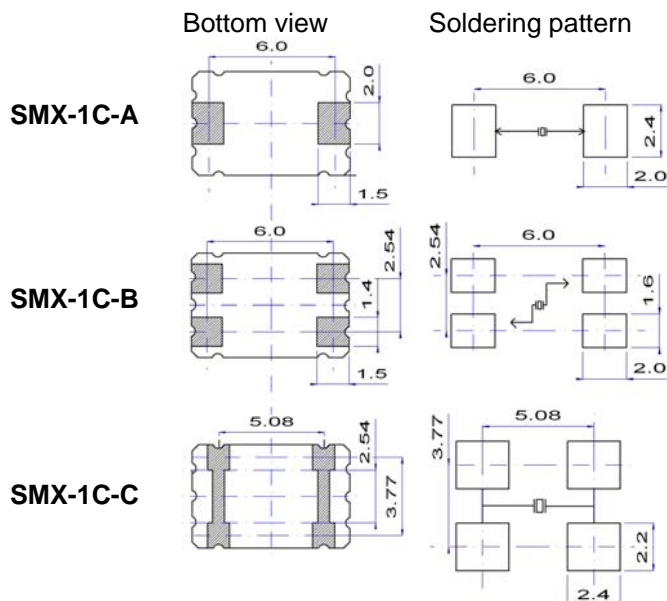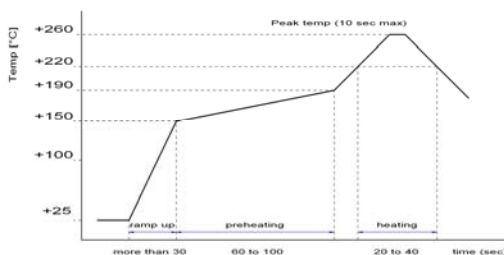

Do not design any conductive path between the pattern

2002/95/EC RoHS compliant

QuartzCom AG
sales@quartzcom.com
www.quartzcom.com

QuartzCom Asia
sales-asia@quartzcom.com

QuartzCom USA
sales-usa@quartzcom.com

ISO 9001
BUREAU VERITAS
Certification



03 May, 10