

HH-1199-6C

Operating Voltage: 125 / 250 v~ Operating Current (Max): 6.0 AMP

Frequency: 50/60 Hz

Temperature Range (Storage): -40 to 85C Temperature Range (Operating): -40 TO 50C


Diel. Withstanding Voltage (Line—case):1500Vac Diel. Withstanding Voltage (line—Line): 1500 Vdc Leakage Current @250 Vac, 60 Hz: 2.5 ma Max.


Residual Voltage after 1.0 sec: 34 V Max.


Order p/n: HH-1199-6C


Note: This filter has a reduced height of 0.7 inch-

for tight fitting applications. The pin height is also 0.19 inch.



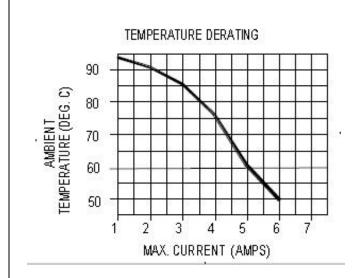

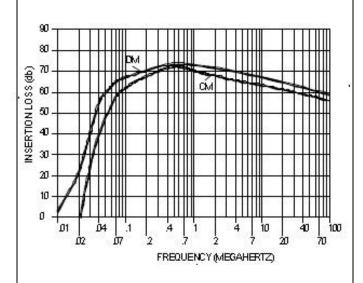

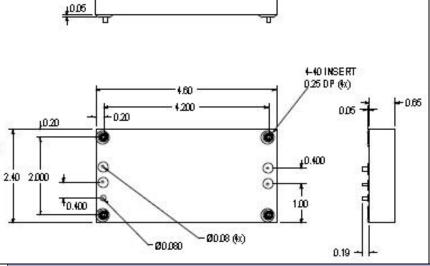



USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884