

MITSUBISHI (OPTICAL DEVICES)  
**FU-627SDF**

**1.55 mm DFB-LD MODULE WITH SINGLEMODE FIBER PIGTAIL**

**DESCRIPTION**

Module type FU-627SDF has been developed for coupling a singlemode optical fiber and a 1.55 $\mu$ m wavelength InGaAsP DFB LD (Laser diode).

FU-627SDF is suitable to light source for high-speed short haul digital optical communication systems.



**FEATURES**

- MQW-DFB laser diode module
- High-speed response
- Emission wavelength is in 1.55 $\mu$ m band

**APPLICATION**

High-speed short haul and long haul digital optical communication systems.

**ABSOLUTE MAXIMUM RATINGS (Tc=25°C)**

Parameter		Symbol	Conditions	Rating	Unit
Laser diode	Optical output power from fiber end	Pf	CW	3	mW
	Reverse voltage	Vrl	-	2	V
Photodiode for monitoring	Reverse voltage	Vrd	-	15	V
	Forward current	Ifd	-	2	mA
Operating case temperature		Tc	-	0~+85	°C
Storage temperature		Tstg	-	-40~+85	°C

MITSUBISHI (OPTICAL DEVICES)

# FU-627SDF

## 1.55 mm DFB-LD MODULE WITH SINGLEMODE FIBER PIGTAIL

### ELECTRICAL/OPTICAL CHARACTERISTICS ( $T_c=25^\circ\text{C}$ , unless otherwise noted)

Parameter	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
Threshold current	$I_{\text{th}}$	CW	-	15	40	mA
Operating current	$I_{\text{op}}$	CW	-	38	90	mA
Operating Voltage	$V_{\text{op}}$	CW, $I_f=I_{\text{op}}$ (Note 1)	-	1.2	1.6	V
Optical output power from fiber end	$P_f$	CW, $I_f=I_{\text{op}}$	2	-	-	mW
Center wavelength	$\lambda_c$	CW, $I_f=I_{\text{op}}$	153 0	1550	157 0	nm
Side mode suppression ratio	SMSR	CW, $I_f=I_{\text{op}}$	30	35	-	dB
Rise and fall time	$t_r, t_f$	$I_b=I_{\text{th}}, 10\sim90\%$ (Note 2)	-	0.3	-	ns
Tracking error (Note 3)	$E_r$	$T_c=0\sim+85^\circ\text{C}, \text{APC}$	-	0.5	-	dB
Differential efficiency	$\eta$	-	-	0.08	-	mW/mA
Monitor current	$I_{\text{mon}}$	CW, $I_f=I_{\text{op}}, V_{rd}=5\text{V}$	0.1	0.5	-	mA
Dark current (Photodiode)	$I_d$	$V_{rd}=5\text{V}$	-	0.1	0.5	$\mu\text{A}$
Capacitance (Photodiode)	$C_t$	$V_{rd}=5\text{V}, f=1\text{MHz}$	-	-	20	pF

Note 1. If : Forward current (LD)

2. Ib : Bias current (LD)

3. Er=MAX|10×log( $P_f(T_c)/P_f(25^\circ\text{C})$ )|

### OPTICAL FIBER SPECIFICATION

Parameter	Limits	Unit
Type	SM	-
Mode field dia.	$9.5\pm1$	$\mu\text{m}$
Cladding dia.	$125\pm2$	$\mu\text{m}$
Jacket dia.	0.9 typ.	mm


MITSUBISHI (OPTICAL DEVICES)

# FU-627SDF

1.55 mm DFB-LD MODULE WITH SINGLEMODE FIBER PIGTAIL

OUTLINE DIAGRAM

(Unit : mm)

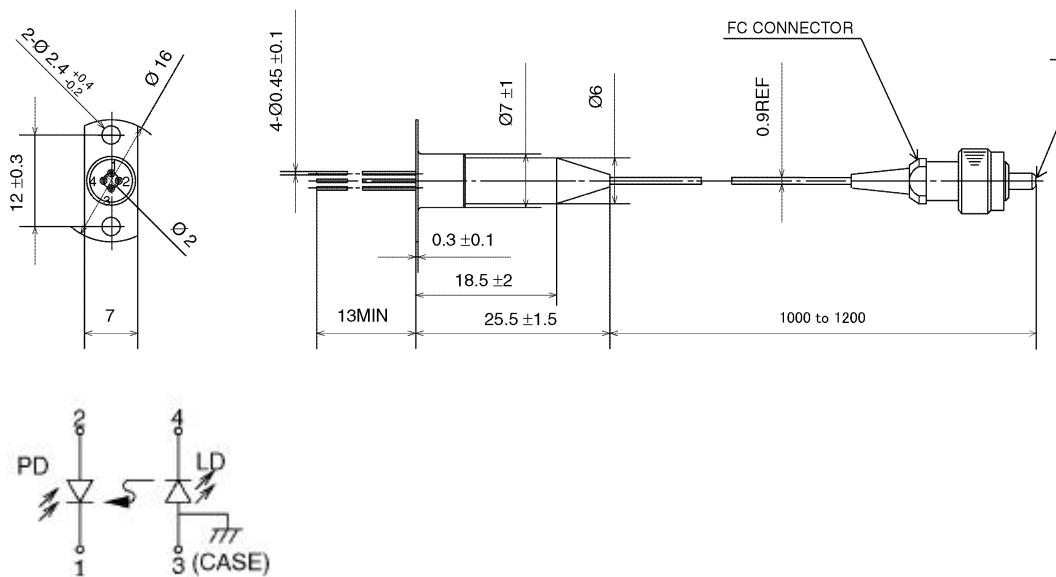

FU-627SDF