


# QY-12864



| Pin Configuration |          |                                                    |
|-------------------|----------|----------------------------------------------------|
| Pin               | Simbol   | Description                                        |
| 1                 | Vss      | Power Supply ( Vss =0)                             |
| 2                 | VDD      | Power Supply ( VDD=5V±10%), 5.5V maximum(25°C)     |
| 3                 | Vo       | Operating voltage for LCD(variable)                |
| 4                 | D/I      | H:Data L:Instruction Code                          |
| 5                 | R/W      | Read / Write                                       |
| 6                 | E        | Enable trigger                                     |
| 7..14             | DB0..DB7 | Data bus                                           |
| 15                | CS1      | Chip Select 1                                      |
| 16                | CS2      | Chip Select 2                                      |
| 17                | RESET    | Controller reset                                   |
| 18                | VEE      | Supply voltage for LCD Drive (VDD-VEE=15V Maximum) |
| 19                | LED_A    | Backlight anode                                    |
| 20                | LED_K    | Backlight cathode                                  |

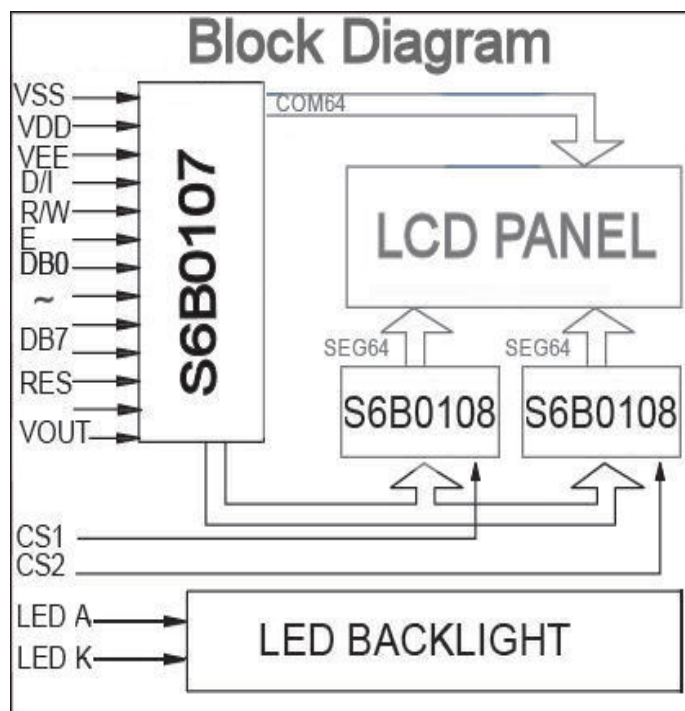