

GDPXA5

Cordless Japan Band

[Inquir](#)**Applocation**

for Spurious reduction

Characteristics


GDPXA5	
Zin/Zout	50 ohm Nominal
Pass Band	Low 253 up to 255MHz High 380 up to 382MHz
Insertion Loss	Low 1.5dB max (253 up to 255MHz) High 1.5dB max (380 up to 382MHz)
V.S.W.R	Low 1.5 max (253 up to 255MHz) High 1.5 max (380 up to 382MHz)
Attenuation	Low 20dB min (380 up to 382MHz) High 20dB min (253 up to 255MHz)

Number of ordered pieces

1000pcs/Reel

Dimensions

Dimension (Unit : mm)

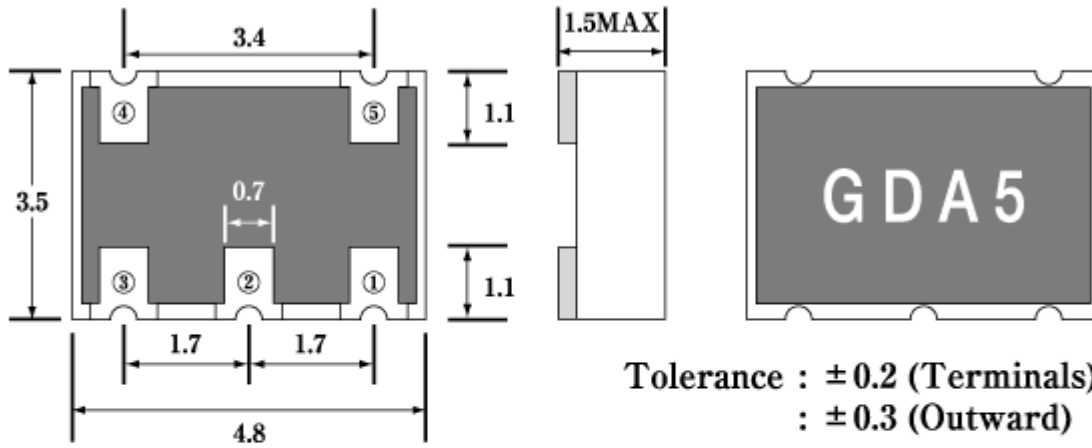


Terminal	
①	Low
②	Common
③	Fixed
④	High
⑤	Fixed

Note

Do not connect any wiring (inclusive of grounding) to terminals No.3 and No.5. They are provided solely for internal connections.

Frequency Data

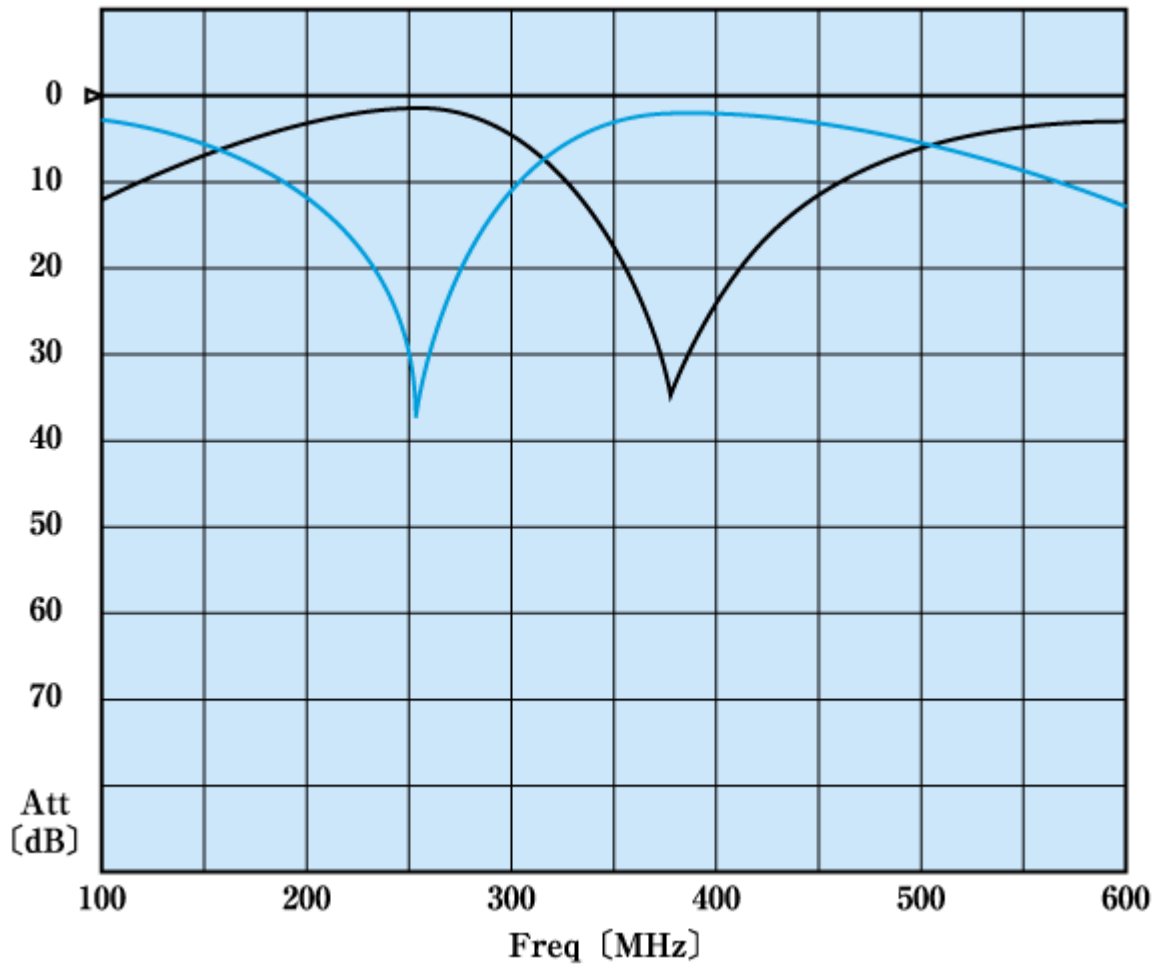

► Products li