

## 8A05 THRU 8A100


CURRENT 8.0 Amperes  
VOLTAGE 50 to 1000 Volts

### Features

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- High forward current capability
- High surge current capability
- Construction utilizes void-free molded plastic technique
- High temperature soldering guaranteed : 250 °C/10 seconds, 0.375"(9.5mm) lead length, 5 lbs, (2.3kg) tension

### Mechanical Data

- Case : P-6 molded plastic body
- Terminals : Lead solderable per MIL-STD-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.07 ounce, 2.1 grams

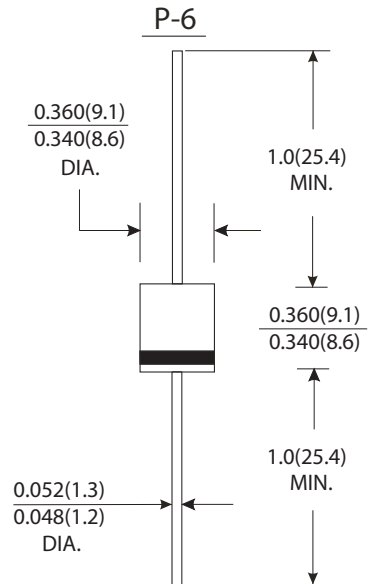

### Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	8A05	8A10	8A20	8A40	8A60	8A80	8A100	Units
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length T <sub>A</sub> =60 °C	I <sub>(AV)</sub>	8.0							Amps
Peak forward surge current 8.3ms half sine wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	400.0							Amps
Maximum instantaneous forward voltage at 8.0A	V <sub>F</sub>	1.1							Volts
Maximum reverse current at rated voltage	T <sub>A</sub> =25 °C	10.0							μA
	T <sub>A</sub> =100 °C	100.0							
Typical thermal resistance (Note 2)	R <sub>θJA</sub>	20.0							°C/W
	R <sub>θJL</sub>	4.0							
Typical junction capacitance (Note 1)	C <sub>J</sub>	150							pF
Operating and storage temperature range	T <sub>J</sub> T <sub>STG</sub>	-50 to +175							°C

#### Notes:

- (1) Measured at 1MHz and applied reverse voltage of 4.0V DC.
- (2) Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm) lead length, P.C.B. mounted with 1.1 × 1.1"(30 × 30mm) copper pads.