

**Features**

- Fast Read Access Time - 70 ns
- Low Power CMOS Operation  
100  $\mu$ A max. Standby  
20 mA max. Active at 5 MHz
- Wide Selection of JEDEC Standard Packages Including:  
28-Lead 600-mil Cerdip, OTP Plastic DIP, SOIC, or TSOP  
32-Pad LCC, 32-Lead JLCC and OTP PLCC
- 5V  $\pm$  10% Supply
- High Reliability CMOS Technology  
2000 V ESD Protection  
200 mA Latchup Immunity
- Rapid Programming - 100  $\mu$ s/byte (typical)
- Two-line Control
- CMOS and TTL Compatible Inputs and Outputs
- Integrated Product Identification Code
- Military, Commercial and Industrial Temperature Ranges

**256K (32K x 8)  
UV  
Erasable  
CMOS  
EPROM**

**Description**


The AT27C256R chip is a low-power, high performance 262,144 bit Ultraviolet Erasable and Electrically Programmable Read Only Memory (EPROM) organized 32K x 8. It requires only one 5 V power supply in normal read mode operation. Any byte can be accessed in less than 70 ns, eliminating the need for speed reducing WAIT states on high performance micro-processor systems.

Atmel's scaled CMOS technology provides low active power consumption, and fast programming. Power consumption is typically only 8 mA in Active Mode and less than 10  $\mu$ A in Standby.


**Pin Configurations**

Pin Name	Function
A0-A14	Addresses
O0-O7	Outputs
CE	Chip Enable
OE	Output Enable
NC	No Connect


CDIP, PDIP, SOIC Top



LCC, JLCC, PLCC Top



TSOP Top View  
Type 1

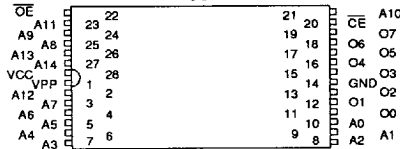

Note: PLCC Package Pins 1 and 17 are DON'T CONNECT.



1074177 0005248 932



## Description (Continued)

The AT27C256R comes in a choice of industry standard JEDEC-approved packages including: 28-pin windowed ceramic DIP, 28-pin one time programmable (OTP) plastic DIP, 28-pin OTP gull wing small outline IC (SOIC), 28-pin OTP thin small outline package (TSOP), 32-pad windowed ceramic leadless chip carrier (LCC), 32-lead windowed J-leaded chip carrier (JLCC), and 32-lead OTP plastic J-leaded chip carrier (PLCC). All devices feature two line control ( $\overline{CE}$ ,  $\overline{OE}$ ) to give designers the flexibility to prevent bus contention.


With high density 32K byte storage capability, the AT27C256R allows firmware to be stored reliably and to be accessed by the system without the delays of mass storage media.

Atmel's 27C256R has additional features to ensure high quality and efficient production use. The Rapid Programming Algorithm reduces the time required to program the part and guarantees reliable programming. Programming time is typically only 100  $\mu$ s/byte. The Integrated Product Identification Code electronically identifies the device and manufacturer. This feature is used by industry standard programming equipment to select the proper programming algorithms and voltages.

## Erase Characteristics

The entire memory array of the AT27C256R is erased (all outputs read as  $V_{OH}$ ) after exposure to ultraviolet light at a wavelength of 2537Å. Complete erasure is assured after a minimum of 20 minutes exposure using 12,000  $\mu$ W/cm<sup>2</sup> intensity lamps spaced one inch away from the chip. Minimum erase time for lamps at other intensity ratings can be calculated from the minimum integrated erasure dose of 15 W-sec/cm<sup>2</sup>. To prevent unintentional erasure, an opaque label is recommended to cover the clear window on any UV erasable EPROM which will be subjected to continuous fluorescent indoor lighting or sunlight.

## Block Diagram

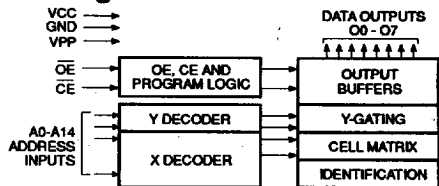

## Absolute Maximum Ratings\*

Temperature Under Bias .....	-55°C to +125°C
Storage Temperature.....	-65°C to +150°C
Voltage on Any Pin with Respect to Ground.....	-2.0 V to +7.0 V <sup>(1)</sup>
Voltage on A9 with Respect to Ground .....	-2.0 V to +14.0 V <sup>(1)</sup>
V <sub>PP</sub> Supply Voltage with Respect to Ground.....	-2.0 V to +14.0 V <sup>(1)</sup>
Integrated UV Erase Dose .....	7258 W-sec/cm <sup>2</sup>

\*NOTICE: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### Notes:

1. Minimum voltage is -0.6 V dc which may undershoot to -2.0 V for pulses of less than 20 ns. Maximum output pin voltage is  $V_{CC}+0.75$  V dc which may overshoot to +7.0 V for pulses of less than 20 ns.

## Operating Modes

Mode \ Pin	$\overline{CE}$	$\overline{OE}$	Ai	V <sub>PP</sub>	V <sub>CC</sub>	Outputs
Read	V <sub>IL</sub>	V <sub>IL</sub>	Ai	V <sub>CC</sub>	V <sub>CC</sub>	DOUT
Output Disable	V <sub>IL</sub>	V <sub>IH</sub>	X <sup>(1)</sup>	V <sub>CC</sub>	V <sub>CC</sub>	High Z
Standby	V <sub>IH</sub>	X	X	V <sub>CC</sub>	V <sub>CC</sub>	High Z
Rapid Program <sup>(2)</sup>	V <sub>IL</sub>	V <sub>IH</sub>	Ai	V <sub>PP</sub>	V <sub>CC</sub>	DIN
PGM Verify <sup>(2)</sup>	X	V <sub>IL</sub>	Ai	V <sub>PP</sub>	V <sub>CC</sub>	DOUT
Optional PGM Verify <sup>(2)</sup>	V <sub>IL</sub>	V <sub>IL</sub>	Ai	V <sub>CC</sub>	V <sub>CC</sub>	DOUT
PGM Inhibit <sup>(2)</sup>	V <sub>IH</sub>	V <sub>IH</sub>	X	V <sub>PP</sub>	V <sub>CC</sub>	High Z
Product Identification <sup>(4)</sup>	V <sub>IL</sub>	V <sub>IL</sub>	A9=V <sub>H</sub> <sup>(3)</sup> A0=V <sub>IH</sub> or V <sub>IL</sub> A1-A14=V <sub>IL</sub>	V <sub>CC</sub>	V <sub>CC</sub>	Identification Code

- Notes: 1. X can be V<sub>IL</sub> or V<sub>IH</sub>.  
2. Refer to Programming characteristics.  
3. V<sub>H</sub> = 12.0 ± 0.5 V.

4. Two identifier bytes may be selected. All Ai inputs are held low (V<sub>IL</sub>), except A9 which is set to V<sub>H</sub> and A0 which is toggled low (V<sub>IL</sub>) to select the Manufacturer's Identification byte and high (V<sub>IH</sub>) to select the Device Code byte.

D.C. and A.C. Operating Conditions for Read Operation

AT27C256R							
		-70	-90	-12	-15	-20	-25
Operating Temperature (Case)	Com.	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C
	Ind.	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C
	Mil.		-55°C - 125°C	-55°C - 125°C	-55°C - 125°C	-55°C - 125°C	-55°C - 125°C
V <sub>CC</sub> Power Supply		5 V ± 10%	5 V ± 10%	5 V ± 10%	5 V ± 10%	5 V ± 10%	5 V ± 10%

D.C. and Operating Characteristics for Read Operation

Symbol	Parameter	Condition	Min	Max	Units
I <sub>LI</sub>	Input Load Current	V <sub>IN</sub> = -0.1 V to V <sub>CC</sub> +1 V		10	μA
I <sub>LO</sub>	Output Leakage Current	V <sub>OUT</sub> = -0.1 V to V <sub>CC</sub> +0.1 V		10	μA
I <sub>PP1</sub> (2)	V <sub>PP</sub> (1) Read/Standby Current	V <sub>PP</sub> = 3.8 to V <sub>CC</sub> +0.3 V		10	μA
I <sub>SB</sub>	V <sub>CC</sub> (1) Standby Current	I <sub>SB1</sub> (CMOS) CE = V <sub>CC</sub> -0.3 to V <sub>CC</sub> +1.0 V	Com.	100	μA
			Ind.,Mil.	200	μA
		I <sub>SB2</sub> (TTL) CE = 2.0 to V <sub>CC</sub> +1.0 V	Com.	2	mA
		Ind.,Mil.	3	mA	
I <sub>CC</sub>	V <sub>CC</sub> Active Current	f = 5 MHz, I <sub>OUT</sub> = 0 mA, CE = V <sub>IL</sub>	Com.	20	mA
			Ind.,Mil.	25	mA
V <sub>IL</sub>	Input Low Voltage		-0.6	0.8	V
V <sub>IH</sub>	Input High Voltage		2.0	V <sub>CC</sub> +0.75	V
V <sub>OL</sub>	Output Low Voltage	I <sub>OL</sub> = 2.1 mA		.45	V
V <sub>OH</sub>	Output High Voltage	I <sub>OH</sub> = -100 μA		V <sub>CC</sub> -0.3	V
		I <sub>OH</sub> = -2.5 mA		3.5	V
		I <sub>OH</sub> = -400 μA		2.4	V
V <sub>PP</sub>	V <sub>PP</sub> Read Voltage	V <sub>CC</sub> = 5 ± 0.25 V	3.8	V <sub>CC</sub> +3	V

Notes: 1. V<sub>CC</sub> must be applied simultaneously or before V<sub>PP</sub>, and removed simultaneously or after V<sub>PP</sub>.

2. V<sub>PP</sub> may be connected directly to V<sub>CC</sub>, except during programming. The supply current would then be the sum of I<sub>CC</sub> and I<sub>PP</sub>.

A.C. Characteristics for Read Operation


			AT27C256R												
			-70		-90		-12		-15		-20		-25		Units
Symbol	Parameter	Condition	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
t <sub>ACC</sub> (4)	Address to Output Delay	CE = OE	Com., Ind.	70	90	120	150	200	250	250	ns				
		= V <sub>IL</sub>	Mil.		90	120	150	200	250	ns					
t <sub>CE</sub> (3)	CE to Output Delay	OE = V <sub>IL</sub>		70	90	120	150	200	250	ns					
t <sub>OE</sub> (3,4)	OE to Output Delay	CE = V <sub>IL</sub>		30	35	35	60	75	100	ns					
t <sub>DF</sub> (2,5)	OE or CE High to Output Float	CE = V <sub>IL</sub>		25	30	30	45	55	60	ns					
t <sub>OH</sub>	Output Hold from Address, CE or OE, whichever occurred first	CE = OE = V <sub>IL</sub>		0	0	0	0	0	0	ns					

Notes: 2, 3, 4, 5. - see AC Waveforms for Read Operation.



1074177 0005250 590


## A.C. Waveforms for Read Operation <sup>(1)</sup>

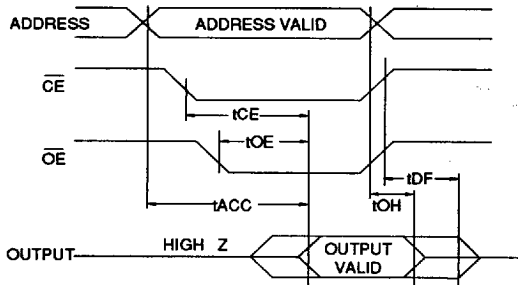

### Notes:


1. Timing measurement references are 0.8 V and 2.0 V. Input AC driving levels are 0.45 V and 2.4 V, unless otherwise specified.
2.  $t_{DF}$  is specified from  $\overline{OE}$  or  $\overline{CE}$ , whichever occurs first. Output float is defined as the point when data is no longer driven.
3.  $\overline{OE}$  may be delayed up to  $t_{CE-tOE}$  after the falling edge of  $\overline{CE}$  without impact on  $t_{CE}$ .
4.  $\overline{OE}$  may be delayed up to  $t_{ACC-tOE}$  after the address is valid without impact on  $t_{ACC}$ .
5. This parameter is only sampled and is not 100% tested.

## Input Test Waveforms and Measurement Levels



$t_r, t_f < 20$  ns (10% to 90%)

## Output Test Load




Note:  $C_L = 100$  pF including jig capacitance.

## Pin Capacitance ( $f = 1$ MHz, $T = 25^\circ\text{C}$ ) <sup>(1)</sup>

	Typ	Max	Units	Conditions
$C_{IN}$	4	6	pF	$V_{IN} = 0$ V
$C_{OUT}$	8	12	pF	$V_{OUT} = 0$ V

Notes: 1. Typical values for nominal supply voltage. This parameter is only sampled and is not 100% tested.

## Programming Waveforms <sup>(1)</sup>

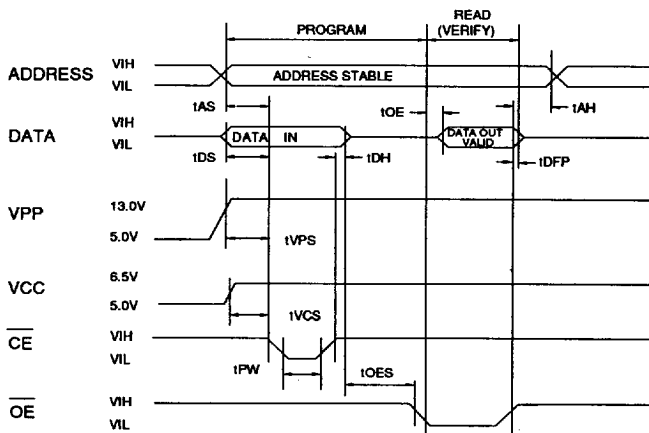

### Notes:

1. The Input Timing Reference is 0.8 V for  $V_{IL}$  and 2.0 V for  $V_{IH}$ .
2.  $t_{OE}$  and  $t_{DFP}$  are characteristics of the device but must be accommodated by the programmer.
3. When programming the AT27C256R a 0.1- $\mu\text{F}$  capacitor is required across  $V_{PP}$  and ground to suppress spurious voltage transients.

D.C. Programming Characteristics

T<sub>A</sub> = 25 ± 5°C, V<sub>CC</sub> = 6.5 ± 0.25 V, V<sub>PP</sub> = 13.0 ± 0.25 V

Sym- bol	Parameter	Test Conditions	Limits		Units
			Min	Max	
I <sub>LI</sub>	Input Load Current	V <sub>IN</sub> =V <sub>IL</sub> ,V <sub>IH</sub>		10	μA
V <sub>IL</sub>	Input Low Level	(All Inputs)	-0.6	0.8	V
V <sub>IH</sub>	Input High Level		2.0	V <sub>CC</sub> +1	V
V <sub>OL</sub>	Output Low Volt.	I <sub>OL</sub> =2.1 mA		.45	V
V <sub>OH</sub>	Output High Volt.	I <sub>OH</sub> =-400 μA	2.4		V
I <sub>CC2</sub>	V <sub>CC</sub> Supply Current (Program and Verify)			25	mA
I <sub>PP2</sub>	V <sub>PP</sub> Current	$\overline{CE}$ =V <sub>IL</sub>		25	mA
V <sub>ID</sub>	A9 Product Identification Voltage		11.5	12.5	V

A.C. Programming Characteristics

T<sub>A</sub> = 25 ± 5°C, V<sub>CC</sub> = 6.5 ± 0.25 V, V<sub>PP</sub> = 13.0 ± 0.25 V

Sym- bol	Parameter	Test Conditions* (see Note 1)	Limits		Units
			Min	Max	
t <sub>AS</sub>	Address Setup Time		2		μs
t <sub>OES</sub>	$\overline{OE}$ Setup Time		2		μs
t <sub>DS</sub>	Data Setup Time		2		μs
t <sub>AH</sub>	Address Hold Time		0		μs
t <sub>DH</sub>	Data Hold Time		2		μs
t <sub>DFP</sub>	$\overline{OE}$ High to Out- put Float Delay	(Note 2)	0	130	ns
t <sub>VPS</sub>	V <sub>PP</sub> Setup Time		2		μs
t <sub>VCS</sub>	V <sub>CC</sub> Setup Time		2		μs
t <sub>PW</sub>	$\overline{CE}$ Program Pulse Width	(Note 3)	95	105	μs
t <sub>OE</sub>	Data Valid from $\overline{OE}$	(Note 2)		150	ns

\*A.C. Conditions of Test:

- Input Rise and Fall Times (10% to 90%) ..... 20 ns
- Input Pulse Levels ..... 0.45 V to 2.4 V
- Input Timing Reference Level ..... 0.8 V to 2.0 V
- Output Timing Reference Level ..... 0.8 V to 2.0 V

Notes:


- V<sub>CC</sub> must be applied simultaneously or before V<sub>PP</sub> and removed simultaneously or after V<sub>PP</sub>.
- This parameter is only sampled and is not 100% tested. Output Float is defined as the point where data is no longer driven — see timing diagram.
- Program Pulse width tolerance is 100 μsec ± 5%.

Atmel's 27C256R Integrated Product Identification Code

Codes	Pins									Hex Data
	A0	O7	O6	O5	O4	O3	O2	O1	O0	
Manufacturer	0	0	0	0	1	1	1	1	0	1E
Device Type	1	1	0	0	0	1	1	0	0	8C

Rapid Programming Algorithm

A 100 μs  $\overline{CE}$  pulse width is used to program. The address is set to the first location. V<sub>CC</sub> is raised to 6.5 V and V<sub>PP</sub> is raised to 13.0 V. Each address is first programmed with one 100 μs  $\overline{CE}$  pulse without verification. Then a verification/reprogramming loop is executed for each address. In the event a byte fails to pass verification, up to 10 successive 100 μs pulses are applied with a verification after each pulse. If the byte fails to verify after 10 pulses have been applied, the part is considered failed. After the byte verifies properly, the next address is selected until all have been checked. V<sub>PP</sub> is then lowered to 5.0 V and V<sub>CC</sub> to 5.0 V. All bytes are read again and compared with the original data to determine if the device passes or fails.

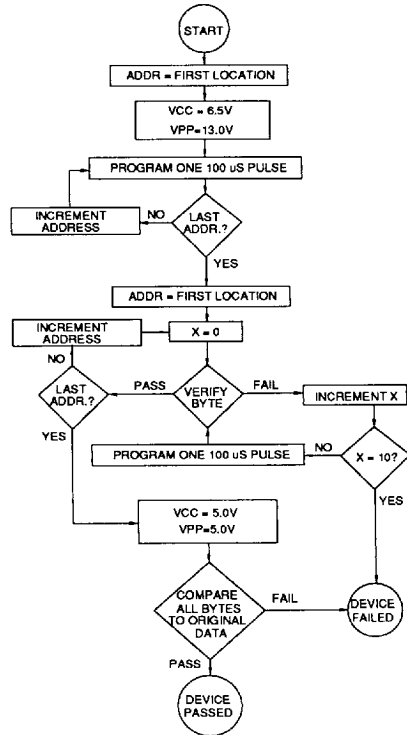

1074177 0005252 363



## Ordering Information

tACC (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
70	20	0.1	AT27C256R-70DC AT27C256R-70KC AT27C256R-70LC	28DW6 32KW 32LW	Commercial (0°C to 70°C)
70	25	0.2	AT27C256R-70DI AT27C256R-70KI AT27C256R-70LI	28DW6 32KW 32LW	Industrial (-40°C to 85°C)
90	20	0.1	AT27C256R-90DC AT27C256R-90JC AT27C256R-90KC AT27C256R-90LC AT27C256R-90PC AT27C256R-90RC	28DW6 32J 32KW 32LW 28P6 28R	Commercial (0°C to 70°C)
90	25	0.2	AT27C256R-90DI AT27C256R-90JI AT27C256R-90KI AT27C256R-90LI AT27C256R-90PI AT27C256R-90RI	28DW6 32J 32KW 32LW 28P6 28R	Industrial (-40°C to 85°C)
			AT27C256R-90DM AT27C256R-90KM AT27C256R-90LM	28DW6 32KW 32LW	Military (-55°C to 125°C)
			AT27C256R-90DM/883 AT27C256R-90KM/883 AT27C256R-90LM/883	28DW6 32KW 32LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
120	20	0.1	AT27C256R-12DC AT27C256R-12JC AT27C256R-12KC AT27C256R-12LC AT27C256R-12PC AT27C256R-12RC	28DW6 32J 32KW 32LW 28P6 28R	Commercial (0°C to 70°C)
120	25	0.2	AT27C256R-12DI AT27C256R-12JI AT27C256R-12KI AT27C256R-12LI AT27C256R-12PI AT27C256R-12RI	28DW6 32J 32KW 32LW 28P6 28R	Industrial (-40°C to 85°C)
			AT27C256R-12DM AT27C256R-12KM AT27C256R-12LM	28DW6 32KW 32LW	Military (-55°C to 125°C)
			AT27C256R-12DM/883 AT27C256R-12KM/883 AT27C256R-12LM/883	28DW6 32KW 32LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
150	20	0.1	AT27C256R-15DC AT27C256R-15JC AT27C256R-15KC AT27C256R-15LC AT27C256R-15PC AT27C256R-15RC	28DW6 32J 32KW 32LW 28P6 28R	Commercial (0°C to 70°C)

Ordering Information

tACC (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
150	25	0.2	AT27C256R-15DI AT27C256R-15JI AT27C256R-15KI AT27C256R-15LI AT27C256R-15PI AT27C256R-15RI	28DW6 32J 32KW 32LW 28P6 28R	Industrial (-40°C to 85°C)
			AT27C256R-15DM AT27C256R-15KM AT27C256R-15LM	28DW6 32KW 32LW	Military (-55°C to 125°C)
			AT27C256R-15DM/883 AT27C256R-15KM/883 AT27C256R-15LM/883	28DW6 32KW 32LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
200	20	0.1	AT27C256R-20DC AT27C256R-20JC AT27C256R-20KC AT27C256R-20LC AT27C256R-20PC AT27C256R-20RC	28DW6 32J 32KW 32LW 28P6 28R	Commercial (0°C to 70°C)
200	25	0.2	AT27C256R-20DI AT27C256R-20JI AT27C256R-20KI AT27C256R-20LI AT27C256R-20PI AT27C256R-20RI	28DW6 32J 32KW 32LW 28P6 28R	Industrial (-40°C to 85°C)
			AT27C256R-20DM AT27C256R-20KM AT27C256R-20LM	28DW6 32KW 32LW	Military (-55°C to 125°C)
			AT27C256R-20DM/883 AT27C256R-20KM/883 AT27C256R-20LM/883	28DW6 32KW 32LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
250	20	0.1	AT27C256R-25DC AT27C256R-25JC AT27C256R-25KC AT27C256R-25LC AT27C256R-25PC AT27C256R-25RC	28DW6 32J 32KW 32LW 28P6 28R	Commercial (0°C to 70°C)
250	25	0.2	AT27C256R-25DI AT27C256R-25JI AT27C256R-25KI AT27C256R-25LI AT27C256R-25PI AT27C256R-25RI	28DW6 32J 32KW 32LW 28P6 28R	Industrial (-40°C to 85°C)
			AT27C256R-25DM AT27C256R-25KM AT27C256R-25LM	28DW6 32KW 32LW	Military (-55°C to 125°C)
			AT27C256R-25DM/883 AT27C256R-25KM/883 AT27C256R-25LM/883	28DW6 32KW 32LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)

4



1074177 0005254 136



## Ordering Information

tACC (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
90	25	0.2	5962-86063 07 XX 5962-86063 07 YX 5962-86063 07 ZX	28DW6 32LW 32KW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
120	25	0.2	5962-86063 06 XX 5962-86063 06 YX 5962-86063 06 ZX	28DW6 32LW 32KW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
150	25	0.2	5962-86063 05 XX 5962-86063 05 YX 5962-86063 05 ZX	28DW6 32LW 32KW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
170	25	0.2	5962-86063 04 XX 5962-86063 04 YX 5962-86063 04 ZX	28DW6 32LW 32KW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
200	25	0.2	5962-86063 01 XX 5962-86063 01 YX 5962-86063 01 ZX	28DW6 32LW 32KW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
250	25	0.2	5962-86063 02 XX 5962-86063 02 YX 5962-86063 02 ZX	28DW6 32LW 32KW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
300	25	0.2	5962-86063 03 XX 5962-86063 03 YX 5962-86063 03 ZX	28DW6 32LW 32KW	Military/883C Class B, Fully Compliant (-55°C to 125°C)

tACC (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
90	20	0.1	AT27C256R-90TC	28T	Commercial (0°C to 70°C)
120	20	0.1	AT27C256R-12TC	28T	Commercial (0°C to 70°C)
150	20	0.1	AT27C256R-15TC	28T	Commercial (0°C to 70°C)
200	20	0.1	AT27C256R-20TC	28T	Commercial (0°C to 70°C)
250	20	0.1	AT27C256R-25TC	28T	Commercial (0°C to 70°C)



## Ordering Information

Package Type	
<b>28DW6</b>	28 Lead, 0.600" Wide, Windowed, Ceramic Dual Inline Package (Cerdip)
<b>32J</b>	32 Lead, Plastic J-Leaded Chip Carrier OTP (PLCC)
<b>32KW</b>	32 Lead, Windowed, Ceramic J-Leaded Chip Carrier (JLCC)
<b>32LW</b>	32 Pad, Windowed, Ceramic Leadless Chip Carrier (LCC)
<b>28P6</b>	28 Lead, 0.600" Wide, Plastic Dual Inline Package OTP (PDIP)
<b>28R</b>	28 Lead, 0.330" Wide, Plastic Gull Wing Small Outline OTP (SOIC)
<b>28T</b>	28 Lead, Plastic Thin Small Outline Package OTP (TSOP)

