




**DB LECTRO** L I C  
*COMPOSANTS ÉLECTRONIQUES*  
*ELECTRONIC COMPONENTS*



**Pin Type**      **PK-35A29EP-110Q , PF-35A29EP-110Q , PL-35A29EP-110Q**

## Dimensions and material

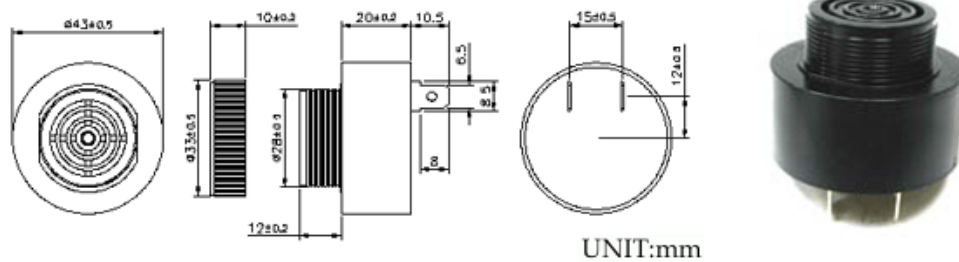

UNIT:mm

## Electrical Characteristics

| Model Number  | K-35A29EP-110Q | PF-35A29EP-110Q             | PL-35A29EP-110Q | Unit       |
|---|----------------|-----------------------------|-----------------|------------|
| Resonant Frequency                                    |                | $2.9 \pm 0.5$               |                 | KHz        |
| Operating Voltage                                     |                | 30~120                      |                 | VDC<br>VAC |
| Rated Voltage   |                | 110                         |                 | VDC<br>VAC |
| Sound Pressure Level(Min)                             |                | 95 at 30cm at Rated Voltage |                 | dB         |
| Current Consumption(Max)                              |                | 25 at Rated Voltage         |                 | mA         |
| Tone Sweep(Pulse)Rate at Rated Voltage(Hz) $\pm 20\%$ | Constant       | Fast Pulse 3.0              | Slow Pulse 1.2  |            |
| Operating Temperature                                 |                | -20 ~ +70                   |                 | °C         |
| Storage Temperature                                   |                | -30 ~ +80                   |                 | °C         |

# DB LECTRO<sup>U</sup><sub>Z</sub>

## Voltage/Current/Sound Pressure

