

Transistors

Power Transistor (-80V, -1A)

2SB1260 / 2SB1181 / 2SB1241


●Features

- 1) High breakdown voltage and high current.
 $BV_{CEO} = -80V, I_c = -1A$
- 2) Good h_{FE} linearity.
- 3) Low $V_{CE(sat)}$.
- 4) Complements the 2SD1898 / 2SD1863 / 2SD1733.

●Structure

Epitaxial planar type
 PNP silicon transistor

●External dimensions (Units : mm)

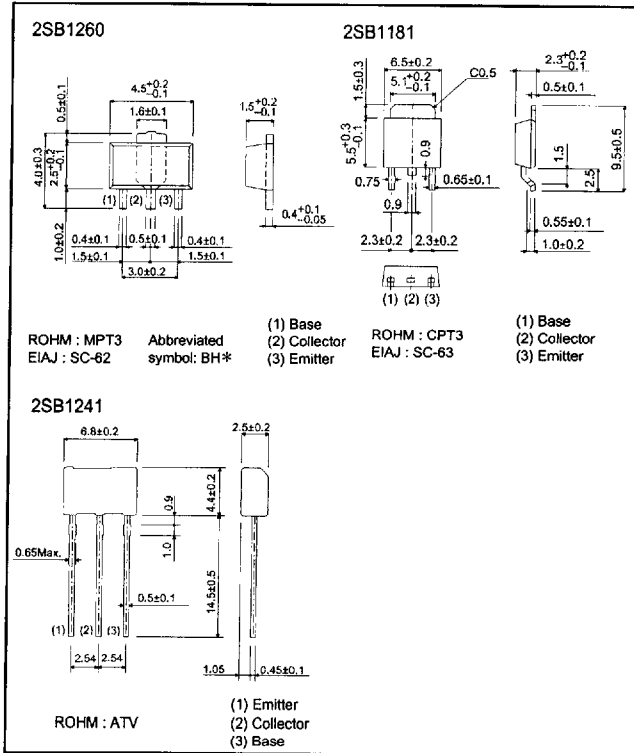

* Denotes h_{FE}

●Absolute maximum ratings ($T_a=25^\circ C$)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	-80	V
Collector-emitter voltage	V_{CEO}	-80	V
Emitter-base voltage	V_{EBO}	-5	V
Collector current	I_c	-1	A(DC)
	I_{CP}	-2	A(Pulse) *1
Collector power dissipation	2SB1260	0.5	W *2
	2SB1241, 2SB1181	2	
	2SB1181	1	W *3
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55~+150	$^\circ C$

*1 Single pulse, $P_w=100ms$

*2 When mounted on a 40x40x0.7 mm ceramic board.

*3 Printed circuit board, 1.7mm thick, collector copper plating 100mm² or larger.



Transistors

●Electrical characteristics (Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage		BV _{CB0}	-80	-	-	V	I _c =-50μA
Collector-emitter breakdown voltage		BV _{CE0}	-80	-	-	V	I _c =-1mA
Emitter-base breakdown voltage		BV _{EB0}	-5	-	-	V	I _E =-50μA
Collector cutoff current		I _{cBO}	-	-	-1	μA	V _{CB} =-60V
Emitter cutoff current		I _{EBO}	-	-	-1	μA	V _{EB} =-4V
Collector-emitter saturation voltage		V _{CE(sat)}	-	-	-0.4	V	I _c /I _E =-500mA/-50mA
DC current transfer ratio	2SB1260, 2SB1181	h _{FE}	82	-	390	-	V _{CE} =-3V, I _c =-0.1A
	2SB1241		120	-	390	-	
Transition frequency	2SB1260, 2SB1241	f _t	-	100	-	MHz	V _{CE} =-5V, I _E =50mA, f=30MHz
	2SB1181		-	100	-	MHz	V _{CE} =-10V, I _E =50mA, f=30MHz
Output capacitance		C _{ob}	-	25	-	pF	V _{CB} =-10V, I _E =0A, f=1MHz

●Packaging specifications and h_{FE}

Type	h _{FE}	Package	Taping		
		Code	TL	TV2	T100
		Basic ordering unit (pieces)	2500	2500	1000
2SB1260	PQR		-	-	○
2SB1241	QR		-	○	-
2SB1181	PQR	○	-	-	-

h_{FE} values are classified as follows :

Item	P	Q	R
h _{FE}	82~180	120~270	180~390

●Electrical characteristic curves




Fig.1 Grounded emitter propagation characteristics




Fig.2 Grounded emitter output characteristics




Fig.3 DC current gain vs. collector current

Transistors




Fig. 4 Collector-emitter saturation voltage vs. collector current




Fig. 5 Gain bandwidth product vs. emitter current




Fig. 6 Collector output capacitance vs. collector-base voltage




Fig. 7 Emitter input capacitance vs. emitter-base voltage




Fig. 8 Safe operating area (2SB1260)

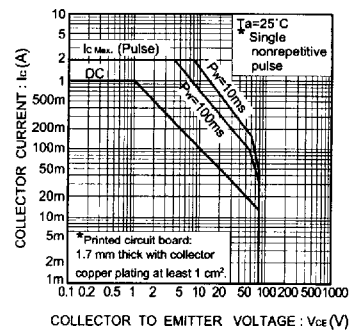


Fig. 9 Safe operating area (2SB1241)




Fig. 10 Safe operating area (2SB1181)