


TS26C Sensing Edge

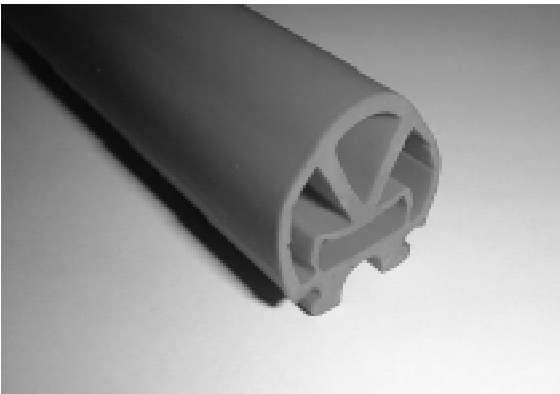

Features

- ▶ Custom configurations
- ▶ Choice of popular colours
- ▶ Easy installation
- ▶ Fail-safe wiring
- ▶ Variety of mounting options
- ▶ Durable construction

TS26C is a compact but very durable sensing edge which is ideal for a wide range of safety applications. Responding to head-on and side impact, TS26C can be supplied in custom configurations to provide increased flexibility. The exterior housing is available in a choice of popular colours as standard and is supplied with either flat or angle channel to satisfy most mounting arrangements.

Applications


- ▶ Side bumpers on AGV's
- ▶ Stage lifts
- ▶ Lift doors
- ▶ Moving doors

Technical specification

Actuating force (80mm dia. test piece)	<30N (3.0Kg)
Overtravel movement to 250N	8mm
Actuating distance (80mm dia. test piece)	approx. 2mm
Housing material	Santoprene
Housing colour	Black, red or yellow
Ingress protection	IP65
Operating temperature	-20°C to + 50°C
Typical weight	700g/m
Recommended max voltage	30Vdc
Switching current @ 30Vdc	1A

Tapeswitch is the registered trade name of Tapeswitch Corporation Inc.

Dimensions

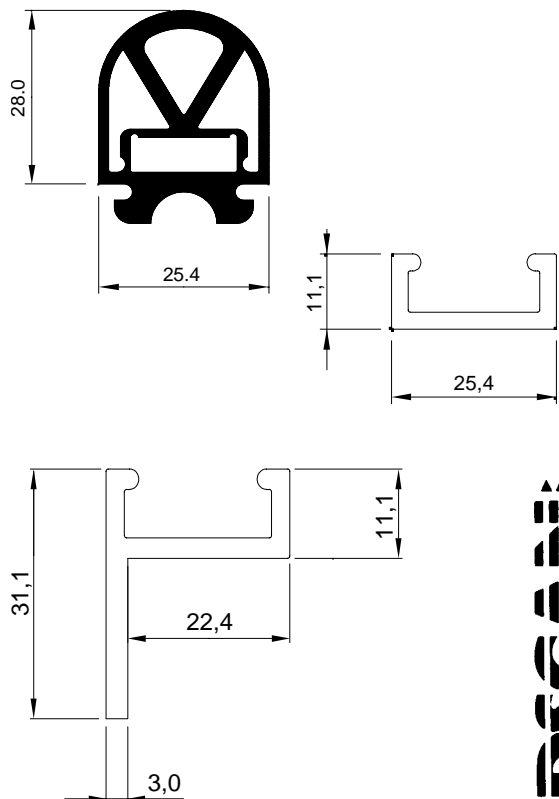

Guardscan Ltd.
 Unit 38 Drumhead Road
 Chorley North Industrial Park, Chorley
 Lancs PR6 7BX England
 Tel: +44 1257 249777
 Fax: +44 1257 246600
 e-mail: sales@guardscan.co.uk
 web: www.guardscan.co.uk

Guardscan GmbH
 Damm Strasse 8
 D-30976 Pattensen
 Germany
 Tel: +49 5101 14490
 Fax: +49 5101 14499
 e-mail: verkauf@guardscan.de
 web: www.guardscan.de

