

## Description

The μPD23C1010A is a 1,048,576-bit ROM fabricated with CMOS silicon-gate technology. The device is static in operation and organized as 131,072 words by 8 bits. It has three-state outputs, fully TTL-compatible inputs and outputs, and is available in a 28-pin plastic DIP.

## Features


- 131,072 words by 8-bit organization
- Fast access time
- TTL-compatible inputs and outputs
- Three-state outputs
- Single +5-volt power supply
- CMOS technology
- Fully static operation
- Low power dissipation of 220 mW

## Ordering Information

Part Number	Address Access Time (max)	Output Enable Access Time (max)	Package
μPD23C1010AC	200 ns	100 ns	28-pin plastic DIP

## Pin Configuration

### 28-Pin Plastic DIP

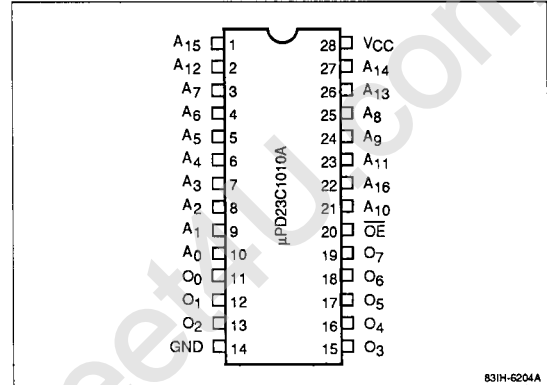

## Pin Identification

Symbol	Function
A <sub>0</sub> - A <sub>16</sub>	Address inputs
O <sub>0</sub> - O <sub>7</sub>	Data outputs
OE	Output enable
GND	Ground
VCC	+5-volt power supply

**Absolute Maximum Ratings**

Supply voltage, $V_{CC}$	-0.3 to +7.0 V
Input voltage, $V_I$	-0.3 V to $V_{CC} + 0.3$ V
Output voltage, $V_O$	-0.3 V to $V_{CC} + 0.3$ V
Operating temperature, $T_{OPR}$	-10 to +70°C
Storage temperature, $T_{STG}$	-65 to +150°C

Exposure to Absolute Maximum Ratings for extended periods may affect device reliability; exceeding the ratings could cause permanent damage. The device should be operated within the limits specified under DC and AC Characteristics.

**Capacitance**


$T_A = 25^\circ\text{C}; f = 1 \text{ MHz}$

Parameter	Symbol	Min	Typ	Max	Unit
Input capacitance	$C_I$			15	pF
Output capacitance	$C_O$			15	pF

**Recommended Operating Conditions**

Parameter	Symbol	Min	Typ	Max	Unit
Input voltage, high	$V_{IH}$	2.2		$V_{CC} + 0.3$	V
Input voltage, low	$V_{IL}$	-0.3		0.8	V
Supply voltage	$V_{CC}$	4.5	5.0	5.5	V
Ambient temperature	$T_A$	-10		70	°C

**Block Diagram**

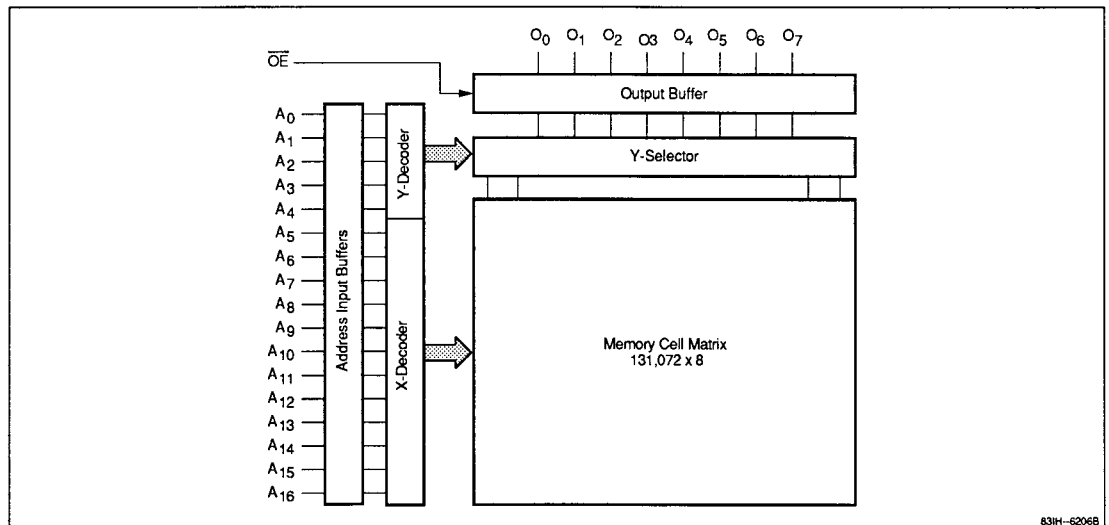

83H-6206B

### DC Characteristics

$T_A = -10$  to  $+70^\circ\text{C}$ ;  $V_{CC} = +5.0\text{ V} \pm 10\%$

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Output voltage, high	$V_{OH}$	2.4			V	$I_{OH} = -400\ \mu\text{A}$
Output voltage, low	$V_{OL}$			0.4	V	$I_{OL} = +2.5\ \text{mA}$
Input leakage current, high	$I_{LIH}$			10	$\mu\text{A}$	$V_I = V_{CC}$
Input leakage current, low	$I_{LIL}$			-10	$\mu\text{A}$	$V_I = 0\ \text{V}$
Output leakage current, high	$I_{LOH}$			10	$\mu\text{A}$	$V_O = V_{CC}$ ; output disabled
Output leakage current, low	$I_{LOL}$			-10	$\mu\text{A}$	$V_O = 0\ \text{V}$ ; output disabled
Power supply current	$I_{CC1}$			40	mA	

### AC Characteristics

$T_A = -10$  to  $+70^\circ\text{C}$ ;  $V_{CC} = +5.0\ \text{V} \pm 10\%$

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Address access time	$t_{ACC}$			200	ns	
Output enable access time	$t_{OE}$			100	ns	
Output hold time	$t_{OH}$	0			ns	
Output disable time	$t_{DF}$	0		60	ns	

#### Notes:

- (1) Input voltage rise and fall times = 20 ns; input and output timing reference levels = 0.8 and 2.0 V; output load = 1 TTL + 100 pF.

Timing Waveform

