



7x7 Square/ Single Turn /Trimming Potentiometer


-- 3323U --



... Install dimension

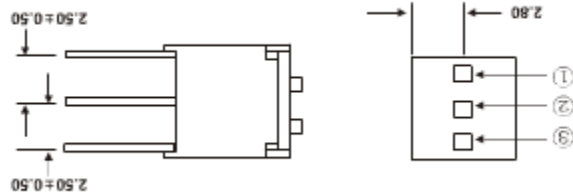



... Mutual dimension

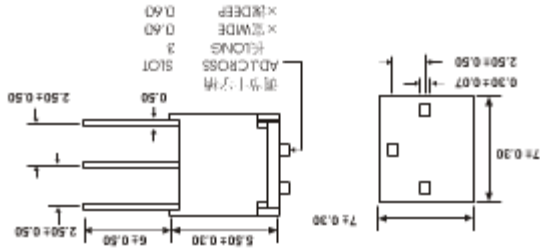

Standard Resistance Table

| Resistance Code | Resistance (Ohms) | Resistance Code | Resistance (Ohms) |
|-----------------|-------------------|-----------------|-------------------|
| 100 | 10 | 200 | 20 |
| 101 | 100 | 500 | 50 |
| 201 | 200 | 101 | 100 |
| 501 | 500 | 202 | 2,000 |
| 102 | 1,000 | 502 | 5,000 |
| 103 | 10,000 | 203 | 20,000 |
| 104 | 100,000 | 253 | 25,000 |
| 204 | 200,000 | 503 | 50,000 |
| 254 | 250,000 | 104 | 100,000 |
| 504 | 500,000 | 204 | 200,000 |
| 105 | 1,000,000 | 254 | 250,000 |
| 205 | 2,000,000 | 504 | 500,000 |

Special resistances available

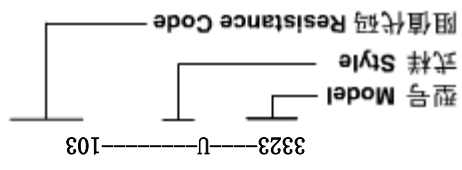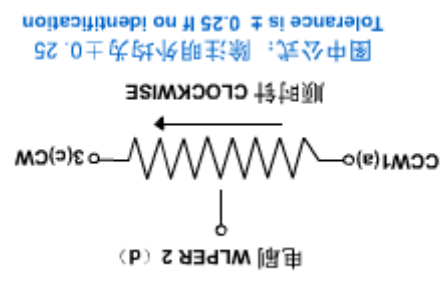

Environmental Characteristics

| Power Rating, 315 volts max | Temperature | Temperature Variation | Temperature Range | Temperature Coefficient | 30min 5cycles | Vibration | Collision |
|-----------------------------|-------------|-----------------------|-------------------|-------------------------|------------------------|---|---|
| 200 | 100°C | ±250ppm/°C | -55°C~100°C | ±250ppm/°C | 500Hz, 0.75mm, 6h, 10~ | 390m/s ² , 4000cycles, R≤5%R | 390m/s ² , 4000cycles, R≤5%R |

Electrical Characteristics

| Standard Resistance Range | Resistance | Tolerance | Absolute Minimum Resistance | Contact Resistance Variation | Insulation Resistance | Withstand Voltage | Effective Travel |
|---------------------------|------------|-----------|-----------------------------|------------------------------|-----------------------|-------------------|------------------|
| 50Ω~2MΩ | ±10% | ≤1%R或 | CRV≤3%或 | R1≥1GΩ | 70Vac | 250° | |

How To Order

Model 3323U-103
Style U
Resistance Code 103