
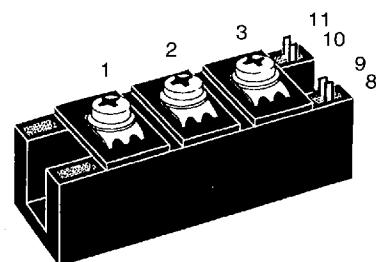


IGBT Modules

Half-Bridge and Chopper Configurations

VII 75-12S3 $I_{C(DC)} = 75 \text{ A}$
VID75-12S3 $V_{CES} = 1200 \text{ V}$
VDI75-12S3 $V_{CE(\text{sat})} = 3.4 \text{ V}$

High Short Circuit SOA Capability

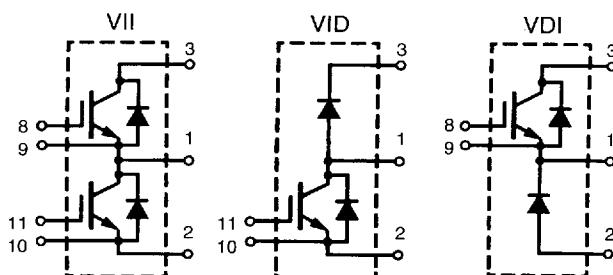

Symbol	Test Conditions	Maximum Ratings		
V_{CES}	$T_J = 25^\circ\text{C} \text{ to } 150^\circ\text{C}$	1200	V	
V_{CGR}	$T_J = 25^\circ\text{C} \text{ to } 150^\circ\text{C}; R_{GE} = 1 \text{ M}\Omega$	1200	V	
V_{GES}	Continuous	± 20	V	
V_{GEM}	Transient	± 30	V	
I_{C25}	$T_c = 25^\circ\text{C}$	75	A	
I_{C100}	$T_c = 100^\circ\text{C}$	64	A	
I_{CM}	$T_c = 25^\circ\text{C}, t_p = 1 \text{ ms}$	150	A	
t_{sc} (SCSOA)	$V_{GE} = 15 \text{ V}, V_{CE} = 0.6 \cdot V_{CES}, T_J = 125^\circ\text{C}$ $R_G = 7.5 \Omega, \text{non repetitive}$	10	μs	
RBSOA	$V_{GE} = 15 \text{ V}, T_J = 125^\circ\text{C}, R_G = 7.5 \Omega$ Clamped inductive load, $L = 100 \mu\text{H}$	$I_{CM} = 150$ @ $0.8 V_{CES}$	A	
P_{tot}	$T_c = 25^\circ\text{C}$	570	W	
T_J		-40 ... +150	$^\circ\text{C}$	
T_{Smax}		110	$^\circ\text{C}$	
T_{stg}		-40 ... +125	$^\circ\text{C}$	
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$ $I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$ Insulating material: Al_2O_3	3000 3600	V~ V~	
M_d	Mounting torque (M5) Terminal connection torque (M5)	2.25 - 2.75 20 - 25 2.50 - 3.70 22 - 33	Nm lb.in. Nm lb.in.	
d_s d_A a	Creepage distance on surface Strike distance through air Max. allowable acceleration	12.7 9.6 50	mm mm m/s^2	
Weight	Typical, including screws	0.13 4.60	kg oz.	

Data according to a single IGBT/FRED unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions.

VID75 has no pin 8 + 9
VDI75 has no pin 10 + 11

Features

- International standard package
- Package with DCB ceramic base plate
- Isolation voltage 3600 V~
- MOS-input (voltage controlled)
- Low saturation voltage
- High short circuit capability
- No latch-up
- Ultra fast free wheeling diode
- Low conduction and commutation losses
- Pulse frequency up to 20 kHz
- UL-registered E 72873


Applications

- AC motor speed control
- DC servo and robot drives
- Uninterruptible power systems (UPS)
- Switch-mode and resonant-mode power supplies
- Induction heating
- DC choppers


Advantages

- Space and weight savings
- Simple mounting with two screws
- Reduced protection circuits
- High $V_{GE(\text{th})}$ for good noise immunity


Symbol	Test Conditions	Characteristic Values		
		min.	typ.	max.
$V_{(BR)CES}$	$I_C = 8 \text{ mA}, V_{GE} = 0 \text{ V}$	1200		V
$V_{GE(\text{th})}$	$I_C = 30 \text{ mA}, V_{CE} = V_{GE}$	5		8 V
I_{CES}	$V_{CE} = V_{CES}$ $V_{CE} = 0.8 \cdot V_{CES}$	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$		8 mA 23 mA
I_{GES}	$V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}$			$\pm 500 \text{ nA}$
$V_{CE(\text{sat})}$	$I_C = 75 \text{ A}, V_{GE} = 15 \text{ V}$	3.4	3.7	V
C_{ies}	$V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}, f = 1 \text{ MHz}$	13.5	nF	
C_{oes}		1.5	nF	
C_{res}		0.27	nF	
$t_{d(on)}$	Inductive load, $T_J = 125^\circ\text{C}$	300	ns	
t_{rv}		200	ns	
$t_{d(off)}$		300	ns	
t_{fi}		600	ns	
E_{on}		12	15	mJ
E_{off}		12	15	mJ
R_{thJC}	for calculation of P_{tot} with heat transfer paste		0.22 K/W	
R_{thJS}			0.32 K/W	

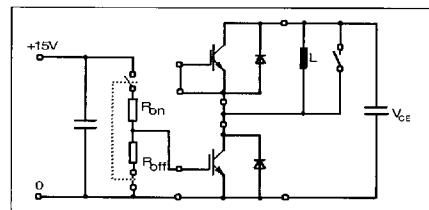

Test circuit for E_{on} , E_{off} , SCSOA and RBSOA
 $R_{on} = 2.5 \Omega$ $L = 100 \mu\text{H}$
 $R_{off} = 7.5 \Omega$ for RBSOA, E_{off}

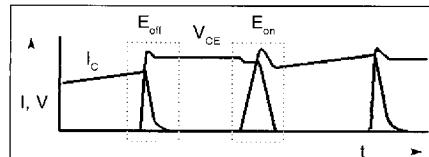

Typical V/I waveforms for inductive load

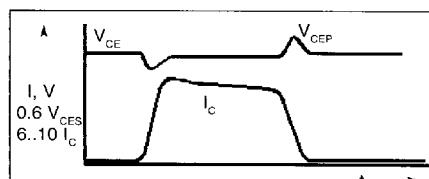



SCSOA conditions $V_{CE} = 0.6 V_{CES}$,
 $V_{CEP} < V_{CES}$, $T_J = 125^\circ\text{C}$

Reverse Diode (FRED)


Characteristic Values
 $(T_J = 25^\circ\text{C}, \text{unless otherwise specified})$

		min.	typ.	max.
V_F	$I_F = 75 \text{ A}, V_{GE} = 0 \text{ V}$	1.8	1.9	V
I_F	$T_c = 25^\circ\text{C}$ $T_c = 100^\circ\text{C}$		75 A 65 A	
I_{RM}	$I_F = 75 \text{ A}, V_{GE} = 0 \text{ V}, -di_F/dt = 600 \text{ A}/\mu\text{s}$		87 A	
t_{rr}	$T_J = 125^\circ\text{C}, V_R = 600 \text{ V}$	200	ns	
R_{thJC}	with heat transfer paste		0.5 K/W	
R_{thJS}			0.9 K/W	

Dimensions in mm (1 mm = 0.0394")

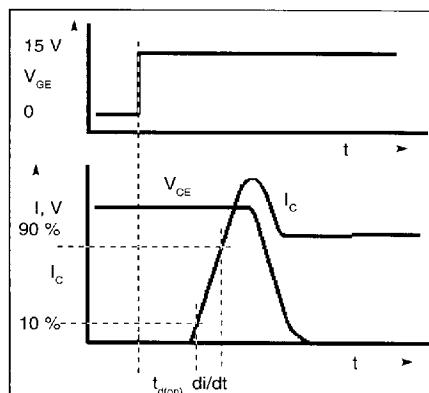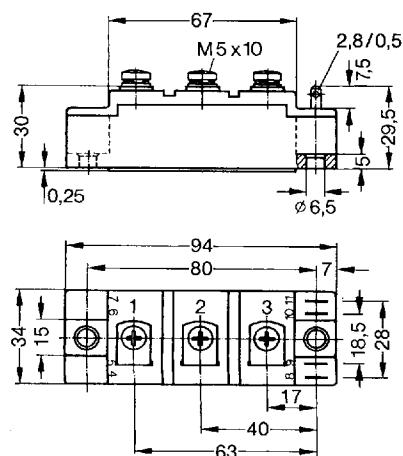

Turn-on waveforms E_{on}

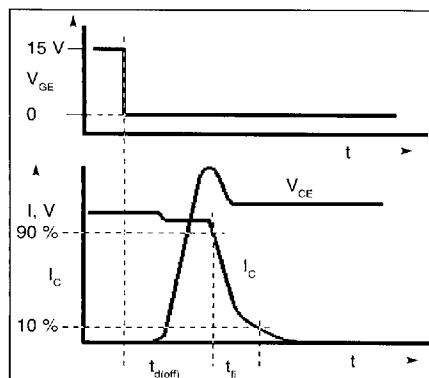

Turn-off waveforms E_{off} RBSOA

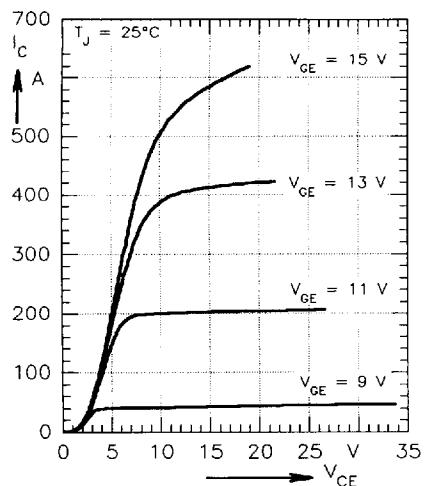


Fig. 1 Typ. output characteristics

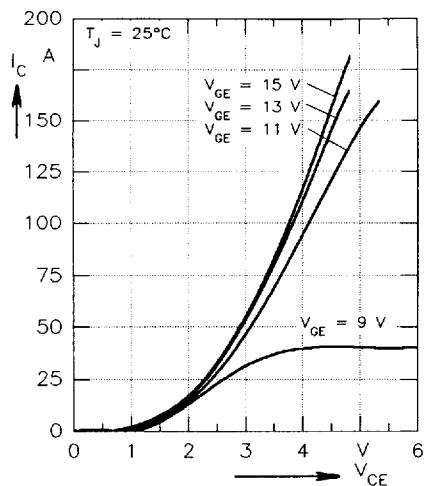


Fig. 2 Typ. output characteristics

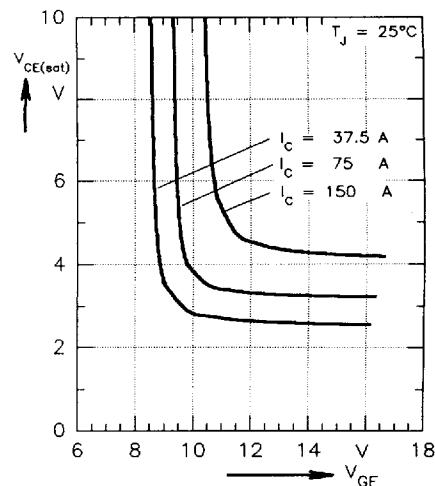


Fig. 3 Typ. on-state characteristics

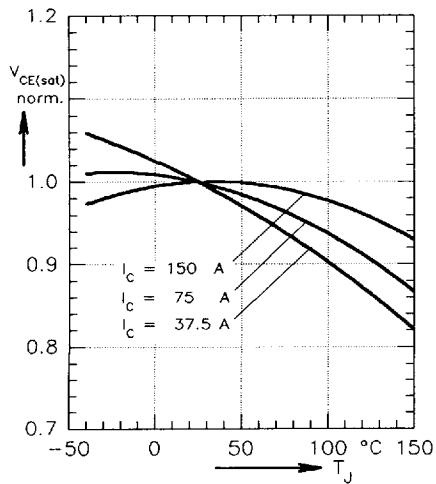


Fig. 4 Typ. temperature dependence of normalized $V_{CE(sat)}$

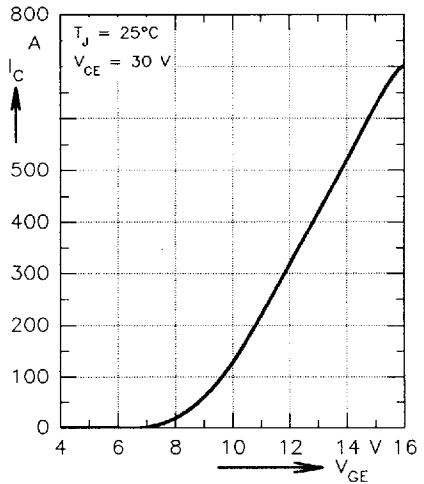


Fig. 5 Typ. transfer characteristics

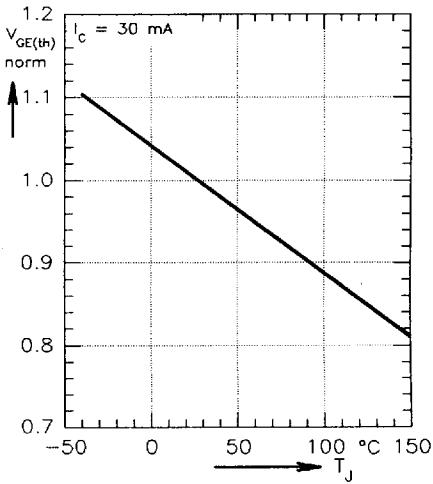


Fig. 6 Temperature dependence of normalized $V_{GE(\text{th})}$

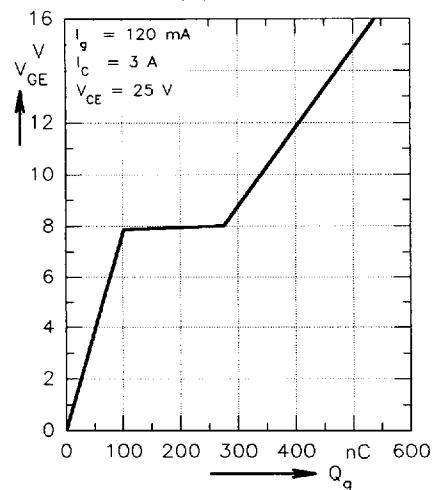


Fig. 7 Typ. turn-on gate charge characteristics

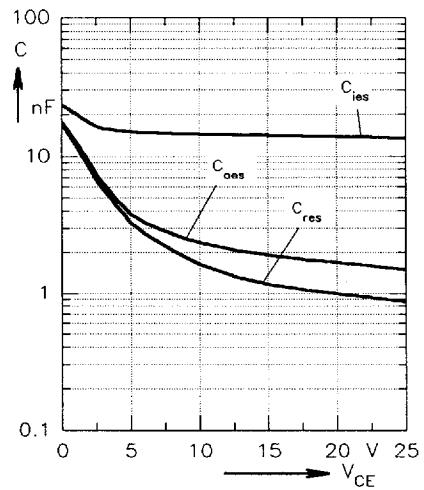


Fig. 8 Typ. capacitances

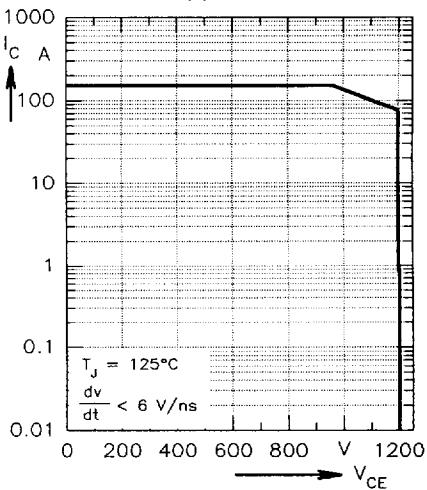


Fig. 9 Reverse biased SOA

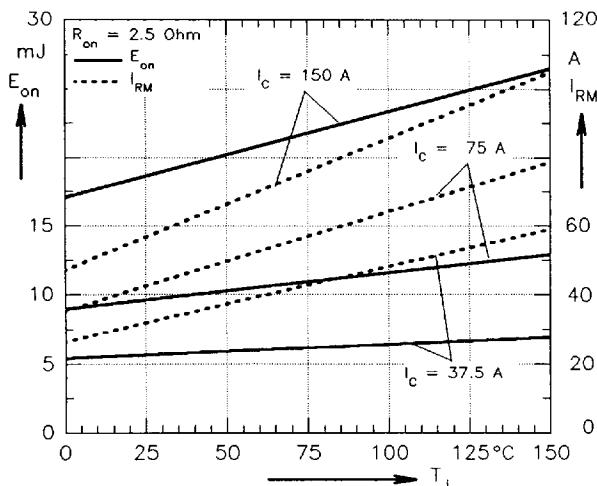


Fig. 10 Typ. turn-on energy per pulse

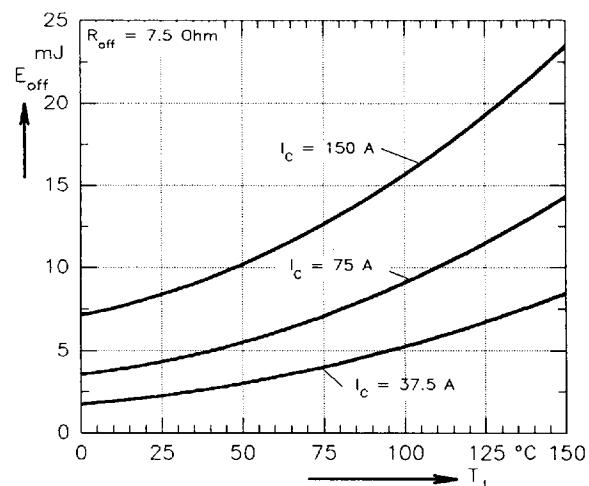


Fig. 11 Typ. turn-off energy per pulse

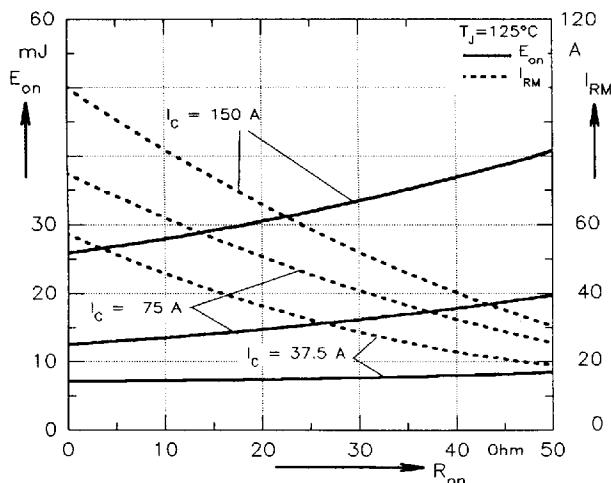


Fig. 12 Typ. turn-on energy per pulse

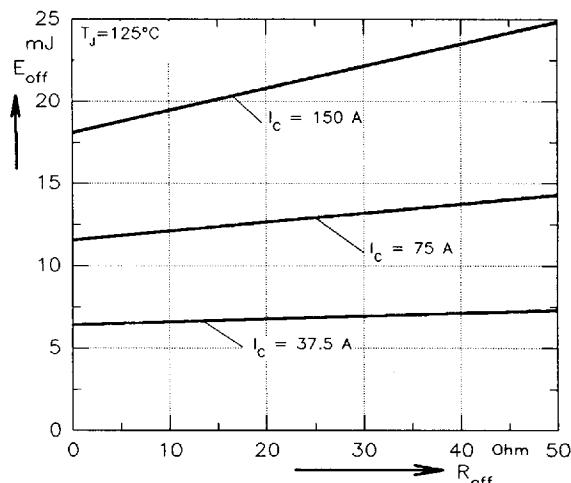


Fig. 13 Typ. turn-off energy per pulse

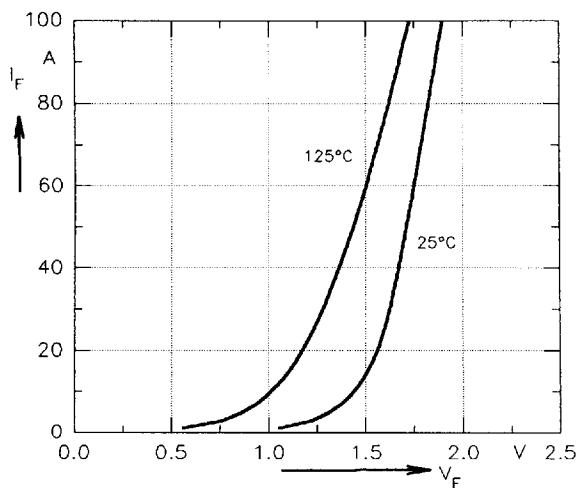


Fig. 14 Typ. forward characteristic of reverse diode

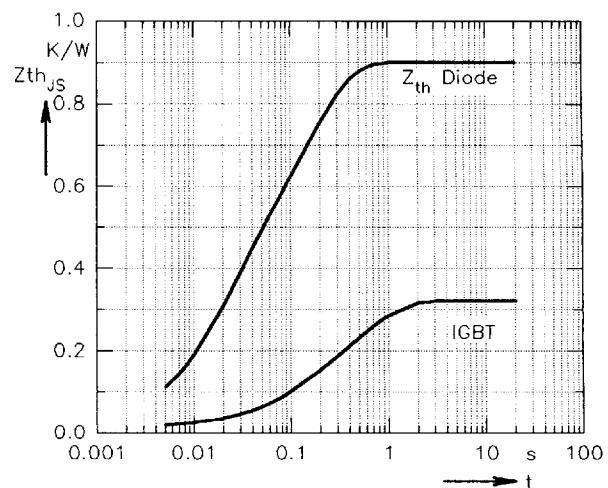


Fig. 15 Transient thermal resistance junction to heatsink of IGBT and Diode (per leg)