


MPT • CPT F5 • PSD

Application	Package			V _{CEO} (V) *V _{CE(sat)} **V _{CEB}	I _c (A)	I _c Max. (A)	P _c (W)		h _{FE}	V _{CE} (V)	I _c (mA)	Circuit	
	MPT	CPT F5	PSD				MPT (Ta=25°C)	CPT PSD (Tc=25°C)					
	Part No.												
Driver		2SB1132	-	-32	-1	-	2*	-	82~390	-3	-100	-	
	New	2SA1900	-	-50	-1	-2	2*	-	82~390	-3	-500	-	
		-	2SB1184	-	-50	-3	-	15	82~390	-3	-500	-	
		2SB1188	2SB1182	-	-32	-2	-	2*	10	82~390	-3	-500	-
		2SB1189	-	-80	-0.7	-	2*	-	82~390	-3	-100	-	
		2SB1260	2SB1181	-	-80	-1	-	2*	10	82~390	-3	-100	-
		-	2SB1275	-	-160	-1.5	-	10	56~270	-5	-100	-	
		-	2SB1516	-	-80	-3	-	10	56~270	-2	-400	-	
		-	2SB1535	-	-100	-6	-	10	56~270	-1	-550	-	
		2SC4132	-	120	2	-	2*	-	56~390	5	100	-	
		2SD1664	-	32	1	-	2*	-	82~390	3	100	-	
	New	2SC5053	-	50	1	2	2*	-	82~390	3	500	-	
		-	2SD1760	-	50	3	-	15	82~390	3	500	-	
		2SD1766	2SD1758	-	32	2	-	2*	10	82~390	3	500	-
		2SD1767	-	80	0.7	-	2*	-	82~390	3	100	-	
		2SD1898	2SD1733	-	80	1	-	2*	10	82~390	3	500	-
		2SD2211	2SD1918	-	160	1.5	-	2*	10	56~270	5	100	-
		2SD2167	-	31±4	2	3	2*	-	56~270	3	500	-	
Low V _{CE(sat)}		2SA1797	-	-50	-2	-5	2*	-	82~270	-2	-500	-	
		-	☆2SA1870	-60	-12	-	-	35	60~320	-2	-2000	-	
		2SB1424	-	-20	-3	-5	2*	-	82~390	-2	-100	-	
	New	2SB1561	-	-60	-2	-5	2*	-	82~270	-2	-500	-	
		2SC4672	-	50	2	5	2*	-	82~270	2	500	-	
		-	☆2SC4939	60	12	-	-	35	60~320	2	2000	-	
		-	2SC5103	60	5	10	-	10	82~270	2	1000	-	
		2SD2150	-	20	3	5	2*	-	120~560	2	100	-	
	New	2SD2391	-	60	2	5	2*	-	82~270	2	500	-	
	Strobo Flash Low V _{CE(sat)}		New 2SA1834	-	-20	-10	-15	-	10	120~560	-2	-500	-
		2SB1308	-	-20	-3	-5	2*	-	82~390	-2	-500	-	
		2SB1386	2SB1412	-	-20	-5	-10	2*	10	82~390	-2	-500	-
		-	2SC5001	-	20	10	15	-	10	120~560	2	500	-
		2SD1963	-	20	3	5	2*	-	120~560	2	500	-	
		2SD2098	2SD2118	-	20	5	10	2*	10	120~560	2	500	-
High h _{FE}		2SB1427	-	-20	-2	-3	2*	-	270~1200	-6	-500	-	
		2SD2153	-	25	2	3	2*	-	390~2700	6	500	-	
		-	2SD2318	-	60	3	4.5	-	15	390~1800	4	500	-
Darlington		-	2SB1183	-	-40**	-2	-	10	1k~200k	-3	-500	Fig.1	
		-	2SB1316	-	-100	-2	-	10	1k~10k	-2	-1000	Fig.3	
		-	2SB1474	-	-80	-4	-	10	1k~10k	-3	-2000	Fig.2	
		-	2SD1759	-	40**	2	-	10	1k~200k	3	500	Fig.5	
		2SD1834	-	60*	1	-	2*	-	2k~	3	500	Fig.4	
		2SD2195	2SD1980	-	100	2	-	2*	10	1k~10k	2	1000	Fig.6
		2SD2170	-	90 ⁺²⁰ ₋₁₀	2	3	2*	-	1k~10k	2	1000	Fig.7	
		2SD2212	2SD2143	-	60±10	2	-	2*	10	1k~10k	2	1000	Fig.7
High Voltage SW		2SA1759	-	-400	-0.1	-0.2	2*	-	56~270	-10	-10	-	
		2SA1812	2SA1727	-	-400	-0.5	-1	2*	10	56~270	-5	-50	-
		-	2SA1862	-	-400	-2	-4	-	10	56~180	-5	-100	-
		-	2SA1807	-	-600	-1	-2	-	10	56~180	-5	-100	-
		2SC4505	-	400	0.1	-	2*	-	56~270	10	10	-	
		-	☆2SC4937	400	2	-	-	35	16~50	5	0.1	-	
	-	☆2SC4938	400	5	-	-	35	16~50	5	3	-		

Notes : 1. ☆ Under development 2. * F5 denotes surface mount version of CPT (SC-64) 3. ★ Package mounted on ceramic 40×40×0.7mm

Darlington transistor internal circuit

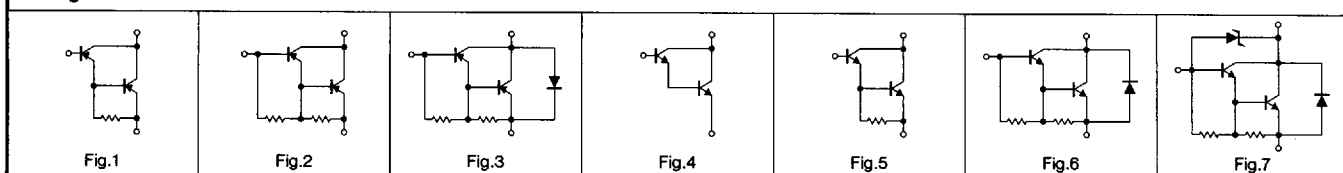

Transistors
 Transistors
 Land pattern
 Page 103
 The Base and Base-emitter Joints for Standard and Special Transistor Products Lists
 Page 107
 Part Marking
 Page 111

MPT • CPT F5 • PSD

●Product Designation

Specify part No., packaging specification code and h_{FE} ranking code.

Package	MPT	CPT F5	PSD
Code	T101	TL	TL
	T100	TR	TR

Packaging specification code



Part No.

Blank unless otherwise required

h_{FE} Ranking code

Code	h_{FE} Range
L	27~56
M	39~82
N	56~120
P	82~180
Q	120~270
R	180~390
S	270~560
E	390~820
U	560~1200
V	820~1800
W	1200~2700
A	1k~
B	5k~
C	10k~

(Unit : mm)

Package	MPT (SOT-89)	CPT F5 (D PAK)	PSD (D ² PAK)
Dimensions	<p>(1) Base (2) Collector (3) Emitter</p>	<p>(1) Base (2) Collector (3) Emitter</p>	<p>(1) Base (2) Collector (3) Emitter</p>
Actual size			
External dimensions (×1.0)			

●Packaging

Package	Packaging type	Packaging style	Direction	Code	Quantity /Package (pcs)	Quantity /Unit (pcs)
MPT	Taping	Embossed reel tape	Pin 3 side on sprocket hole side	T100	1,000	-
			Fin on sprocket hole side	T101		
CPT F5	Taping	Embossed reel tape	Fin on sprocket hole side	TL	2,500	-
	Bulk	Polyethylene bag	Pin 3 side on sprocket hole side	TR		
PSD	Taping	Embossed reel tape	Fin on sprocket hole side	TL	1,000	-
	Bulk	Polyethylene bag	Pin 3 side on sprocket hole side	TR		
					500	100

●Packaging Specifications

(Unit : mm)

Reel	Tape
<p>MPT (SOT-89)</p>	
<p>CPT F5 (D PAK)</p>	
<p>PSD (D² PAK)</p>	

Transistors

Transistors

Land pattern

Page 103

The Class and Basic marking units for SMD and SMD STANDARD PACKING UNITS

Page 107

Part Marking

Page 111