



CML 3 Series — Indicator Lights

C O N F I G U R A T I O N

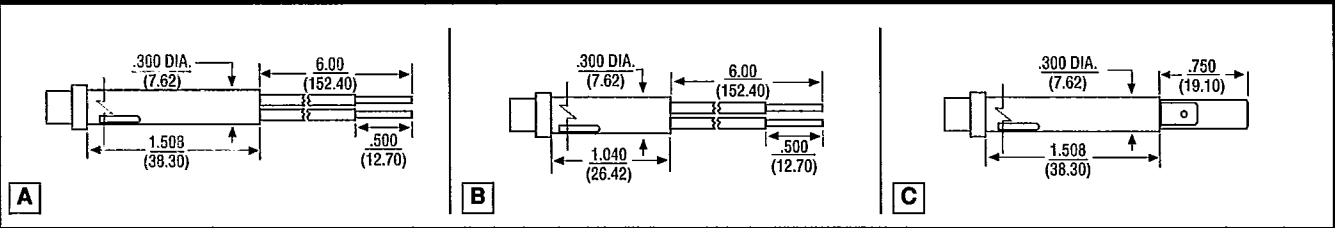

5
Indicator
Products

L E N S S T Y L E

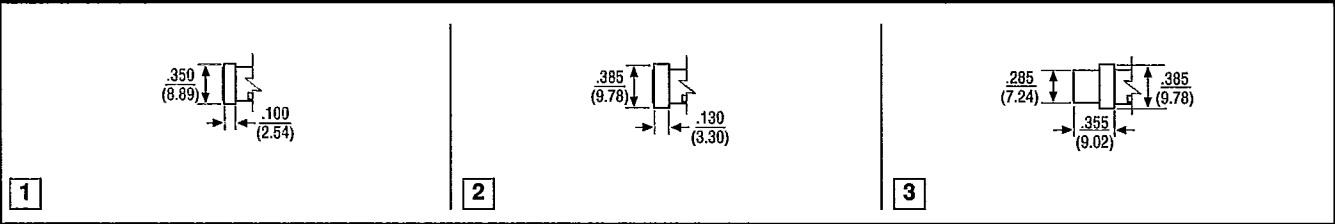

How To Order: 3 A 2 R N 7R

Series	Configuration	Lens Style	Lens Color	Lens Type	Lamp Type
3	A (Standard Body w/ 6" Wire Leads) B (Short Body w/ 6" Wire Leads) C (Standard Body w/ .187" Quick Connect Terminals)	1 (Flush, No Bezel) 2 (Flush, Chrome Bezel) 3 (Hi-Cap, Chrome Bezel)	A (Amber) B (Blue) C (Clear) G (Green) R (Red) W (White Type "T" Only)	N* (Non-Diffused, Transparent) T (Translucent)	1 (6.3V Incandescent) 2 (14V Incandescent) 3 (28V Incandescent) 4 (125V Neon)* 5 (250V Neon)* 6G (2V Green LED) 6R (2V Red LED) 6Y (2V Yellow LED) 7G (6V Green LED) 7R (6V Red LED) 7Y (6V Yellow LED) 8G (14V Green LED) 8R (14V Red LED) 8Y (14V Yellow LED) 9G (28V Green LED) 9R (28V Red LED) 9Y (28V Yellow LED)

* Recommended for LEDs and Neon lamps

* CML will utilize green and blue Neon lamps where appropriate

Mounting Information:

- All Chicago Miniature Lamp 3 Series indicator lights snapfit into a 0.312 (7.9mm) mounting hole.
- Minimum panel thickness is 0.030 (0.762mm).
- These indicator lights require no mounting hardware.
- For a more secure mount, a push nut is available as an accessory item.
- Maximum panel depth required is as follows:
Configuration A = 1.42 (36.1mm)
Configuration B = 0.940 (23.9mm)
Configuration C = 2.00 (50.8mm)

Materials:

- All indicator light bodies are molded of DuPont Zytel 132F or equivalent.
- All lenses are molded of high temperature Lexan.
- All wire leads are 18 AWG with 105°C black plastic insulation except on LED versions where the Anode lead will be red and the cathode lead black.
- Bezels are nickel plated brass.
- Quick connect terminals are brass.

Agency Approvals:

- A and C configuration indicator lights are Listed with Underwriters Laboratories to 277V and CSA Certified from 125V to 277V.
- B configuration indicator lights are Recognized by Underwriters Laboratories to 250V and CSA Certified from 125V to 277V.