

# SDT Series Micro Mini Pendulum Surface Mount Detect Switches



## Features/Benefits

- Low profile package sits just 3,30 mm off PCB
- Design allows top or side actuation
- Low actuation force, 30 grams max.
- Pick and place compatible, available in tape & reel packaging
- RoHS compliant and compatible

## Typical Applications

- Consumer electronics
- Computers
- Medical devices
- ATCA or MicroTCA devices



Advanced TCA®

μTCA®

## Specifications

CONTACT RATING: 1 mA 5 VDC  
 MECHANICAL AND ELECTRICAL LIFE: 100,000 cycles min.  
 CONTACT RESISTANCE: 1 Ω max. initial.  
 INSULATION RESISTANCE: 10 M Ω min. between adjacent contacts.  
 OPERATING TEMPERATURE: -20°C to +70°C  
 STORAGE TEMPERATURE: -30°C to +80°C  
 PACKAGING: Tape & reel, 2,200 per reel.

## Materials


BASE: LCP  
 COVER: PA 46  
 ACTUATOR: LCP  
 MOVABLE BLADE: Silver over nickel plate.  
 TERMINALS: Silver over nickel plate.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.


## Build-A-Switch

Complete part numbers for SDT Series are shown below.

PART NUMBER	TERMINALS	SCHEMATIC
<b>SDT004</b>	Silver	 CIRCUIT DIAGRAM

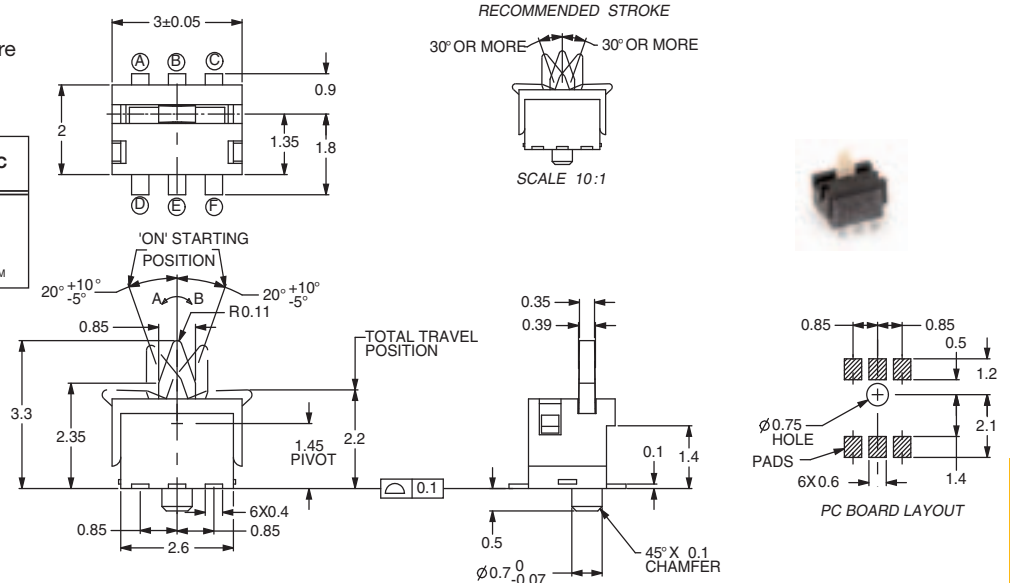

## TAPE & REEL

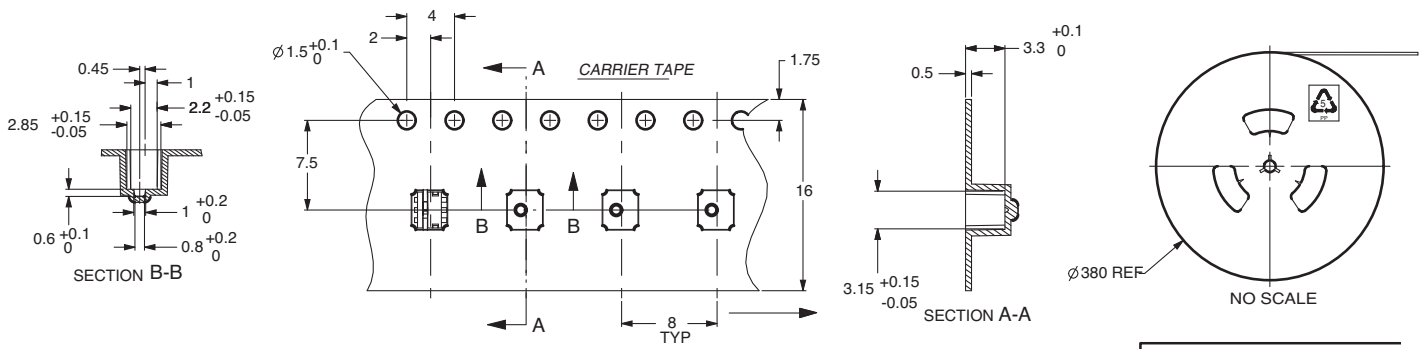

Third Angle Projection  
 Dimensions are shown: mm  
 Specifications and dimensions subject to change



Detect