

GENERAL DISCRIPTION

2SC2312 is a silicon NPN epitaxial planar type transistor specifically designed for linear amplifiers operating in HF band.

FEATURES


1. High Output, High Gain :  $P_o=17W$ ,  $G_{pe}=10.5dB$ ; @27MHz, 12V
2. Low IMD. 3rd;  $-30dB(TYP)$ , 11th;  $-62dB(TYP)$ , and higher order IMD bellow than  $-65dB$ . @  $V_{cc}=13.5V$ ,  $P_o=14W$
3. Convenient plastic molded package.

APPLICATIONS

Especially suitable for the output stage of 27MHz 4W AM/ 12W SSB transceiver sets.

Type	2SC2312									
Application	RF - Power Amplification									
Structure	Silicon NPN Epitaxial Planar Type									
Outline	See Fig. 1									
	$V_{CEQ}$	$V_{EBQ}$	$V_{CEO}$	$I_C$	$I_{EBO}$	$f_c$	$P_{Dc}$	$T_j$	$T_{Stg}$	$T_a$
			$R_{BE}=\infty$			$T_c=25^\circ C$				$25 \pm 3^\circ C$
Max. Ratings	60 V	5 V	20 V	6 A	— A	25 W	— W	+150°C	-55 ~ +150°C	
Characteristics	Symbol	Test Conditions	Limits			Unit				
			Min.	Typ.	Max.					
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 5mA$	5			V				
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 1mA$	60			V				
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10mA$	20			V				
Collector to Cutoff Current	$I_{CBO}$	$V_{CB} = 30V$			500	$\mu A$				
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 4V$			100	$\mu A$				
DC Forward Current Transfer Ratio	$h_{FE}$	$V_{CE} = 12V, I_C = 100mA$	20	50	180	-				
Output Power	$P_o$	$V_{CC} = 12V, f = 27MHz$	17	18.5		W				
Collector Efficiency	$\eta_c$	$P_{in} = 1.5W$	60	70		%				

Fig. 1 Outline Drawing

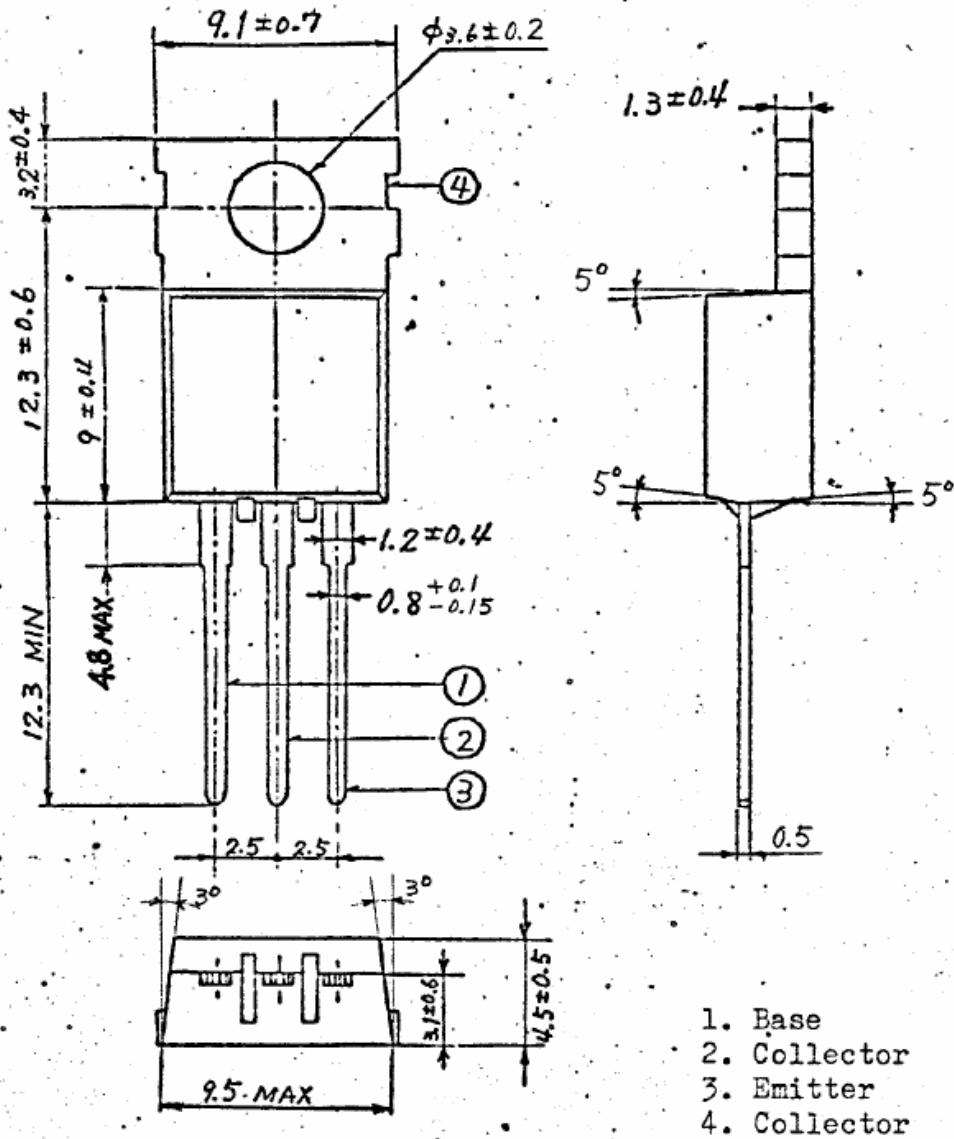

All dimensions in mm