

## KVR100X64C3/64 100MHz SDRAM 168-Pin PC100 DIMM Memory Module

### DESCRIPTION:

This document describes ValueRAM's 8M x 64-bit (64MB), CAS Latency 3 (CL3) SDRAM (Synchronous DRAM) 100MHz memory module. The components on this module include eight 8M x 8-bit (2M x 8-bit x 4 Bank / PC100 components) SDRAM in TSOP packages. This 168-pin DIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

### FEATURES:

- ✓ CLK Cycle Time (tCC) min. = 10ns (CAS Latency = 3) / max. = 1000ns
- ✓ Row Cycle Time (tRC) 70ns
- ✓ CLK to Output (tSAC) max. = 6ns (CAS Latency = 3)
- ✓ Single Power Supply of +3.3V (+/- .3V)
- ✓ Power 2.772 W (operating)
- ✓ UL Rating 94 V - 0

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.375" (34.92mm).

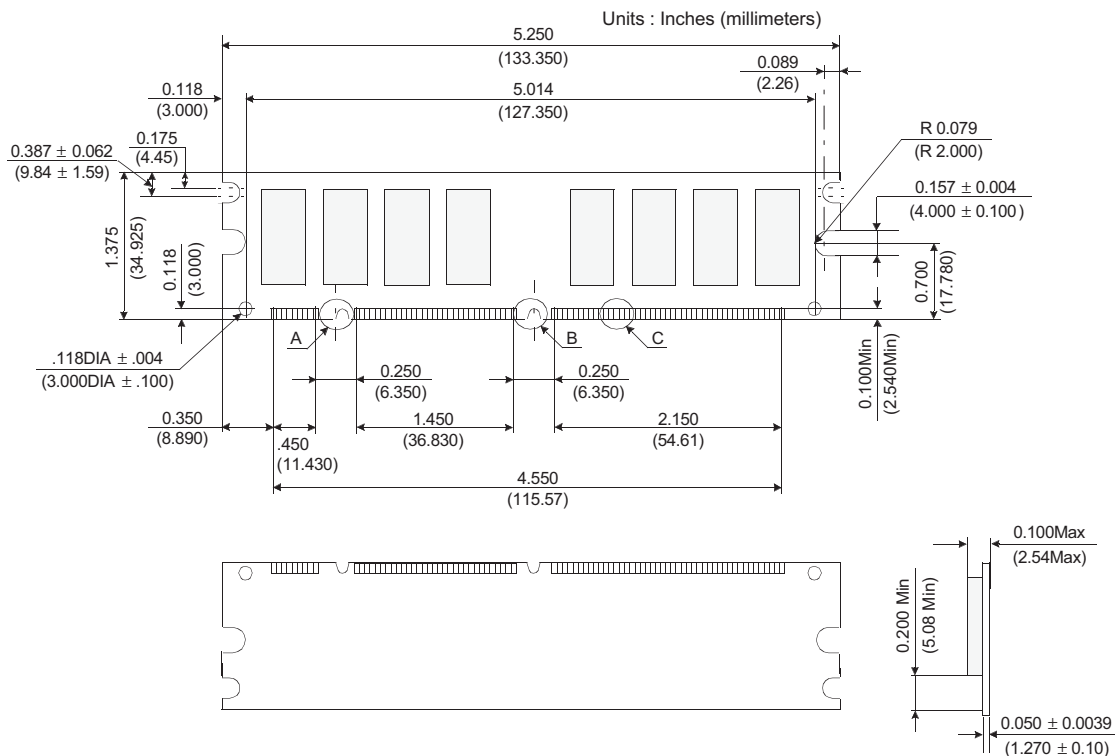


Figure 1: KVR100X64C3/64 168-Pin SDRAM Module