




Packaging & Handling

Production quantities supplied on T & R, 1k or 3k pcs per reel.
Small quantities may be supplied on tape (no reel), or in bulk.

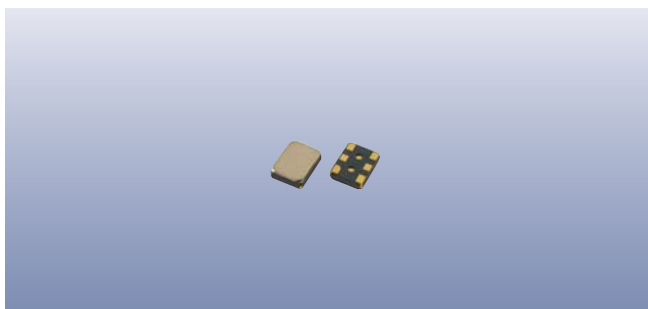

♦ Static sensitive product. Observe proper handling precautions


Marking

S92 DC
FREQUENCY

Marking type: Laser
DC = Date code in YM, eg "CE" = May 2003

	A	B	C	D	E	F	G	H	J	K	L	M
Y	1	2	3	4	5	6	7	8	9	0		
M	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

Tape & Reel Specification

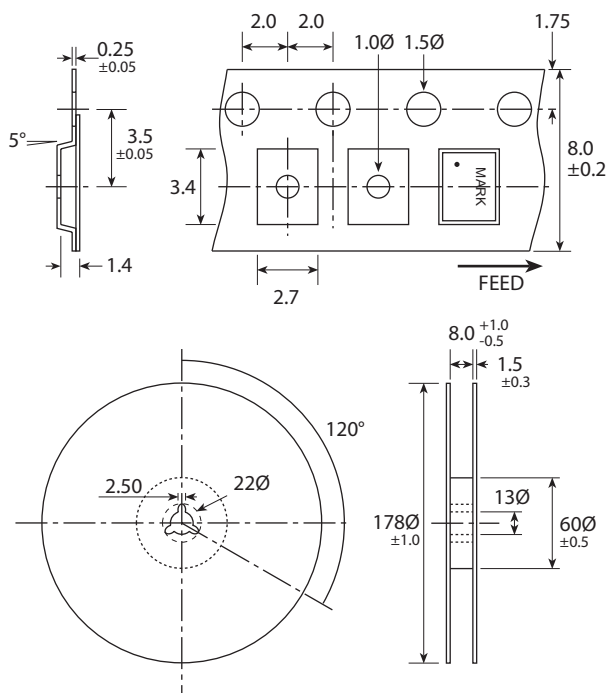

Not to scale. Dimensions in mm. Tolerances ± 0.1 mm unless otherwise stated

Construction

- ▮▮▮▮ **Ceramic body with gold-plated pads**
- ▮▮▮▮ **Metal lid, seam sealed**


Composition



This product is lead-free, and is fully compliant with the RoHS directive 2002/95/EC



Soldering Profile

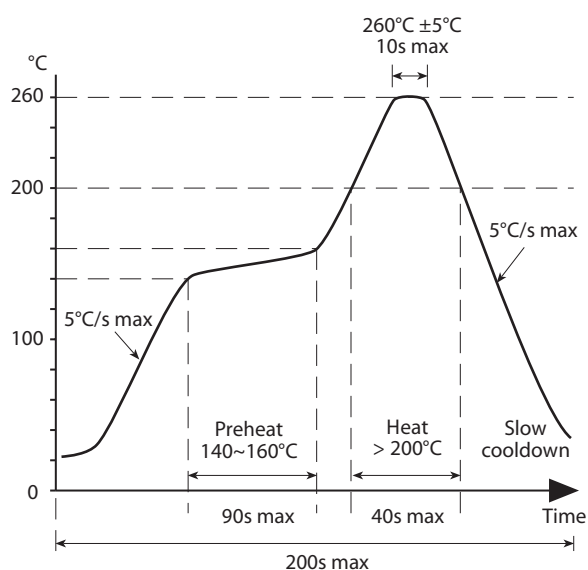

Solder resistance: 260°C x 10 secs x 2.