

APPLICATIONS

- ✓ T1/E1
- ✓ Customer Premise Equipment (CPE)
- ✓ Telecommunication Equipment: Base Stations, WAN, Routers, Multiplexers
- ✓ Wireless LANs

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 8/20 μ s - 100A

FEATURES

- ✓ 3,600 Watts Peak Pulse Power per Line ($t_p=8/20\mu$ s)
- ✓ 600 Watts Peak Pulse Power per Line ($t_p=10/1000\mu$ s)
- ✓ 100A (2/10 μ s) per Bellcore GR-1089 (Intra-Building)
- ✓ ITKU.20 I_{pp} @ 100A (5/310 μ s)
- ✓ Bidirectional Configuration
- ✓ High Surge Capability
- ✓ Available in Multiple Voltages
- ✓ Protects Two (2) Bidirectional Lines
- ✓ Low Capacitance: < 30pF per Line Pair
- ✓ RoHS Compliant

MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SO-16 Package
- ✓ Weight 0.15 grams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 16mm Tape and Reel per EIA Standard 481
- ✓ Marking: Logo, Part Number, Date Code & Pin One Defined By Dot on Top of Package

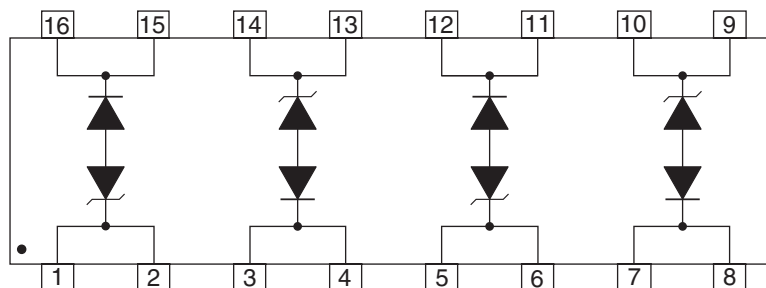
PIN CONFIGURATION


SMP6LC05-2P thru SMP6LC24-2P

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	3600	Watts
Peak Pulse Power ($t_p = 10/1000\mu s$) - See Figure 1	P_{PP}	600	Watts
Operating Temperature	T_L	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Peak Pulse Current ($t_p = 8/20\mu s$) - See Figure 1	I_{PP}	100	Amps

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_{PP} = 10A$ V_C VOLTS	TYPICAL CAPACITANCE @ 0V, 1MHz C pF
SMP6LC05-2P	5.0	6.0	300	9.6	15
SMP6LC6.5-2P	6.5	7.2	300	12.4	15
SMP6LC08-2P	8.0	8.5	25	13.6	15
SMP6LC12-2P	12.0	13.3	2	19.9	15
SMP6LC15-2P	15.0	16.7	2	24.4	15
SMP6LC24-2P	24.0	26.7	2	38.9	15

Note 1: Do no surge from pins 15/16 to 1/2, 3/4 to 13/14, 11/12 to 5/6 and 7/8 to 9/10. PIV typically greater than 100 Volts for each rectifier diode.

GRAPHS

FIGURE 1
 PEAK PULSE POWER VS PULSE TIME

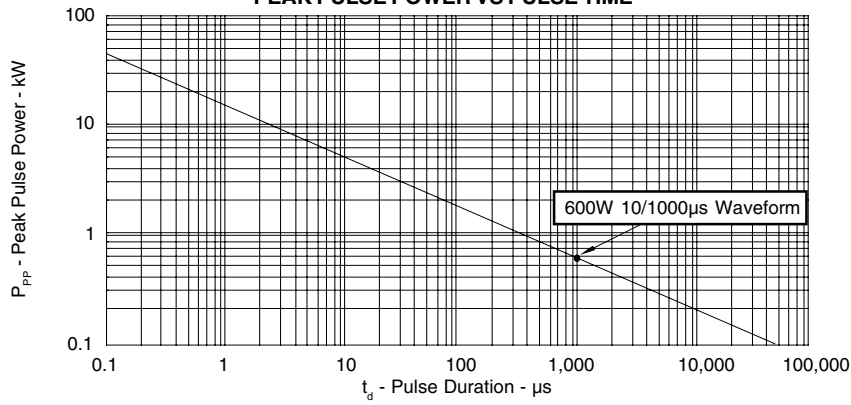


FIGURE 2
 PULSE WAVE FORM



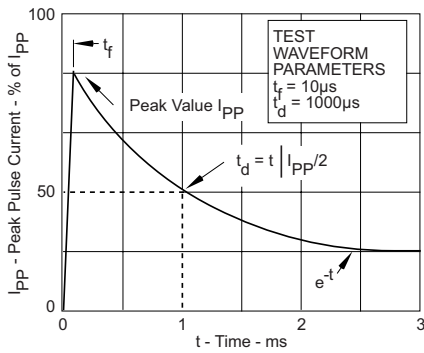


FIGURE 3
 POWER DERATING CURVE

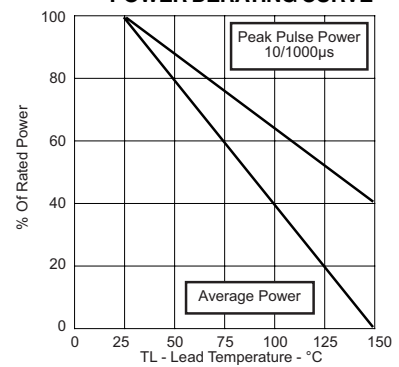

SMP6LC05-2P thru SMP6LC24-2P

SO-16 PACKAGE OUTLINE & DIMENSIONS

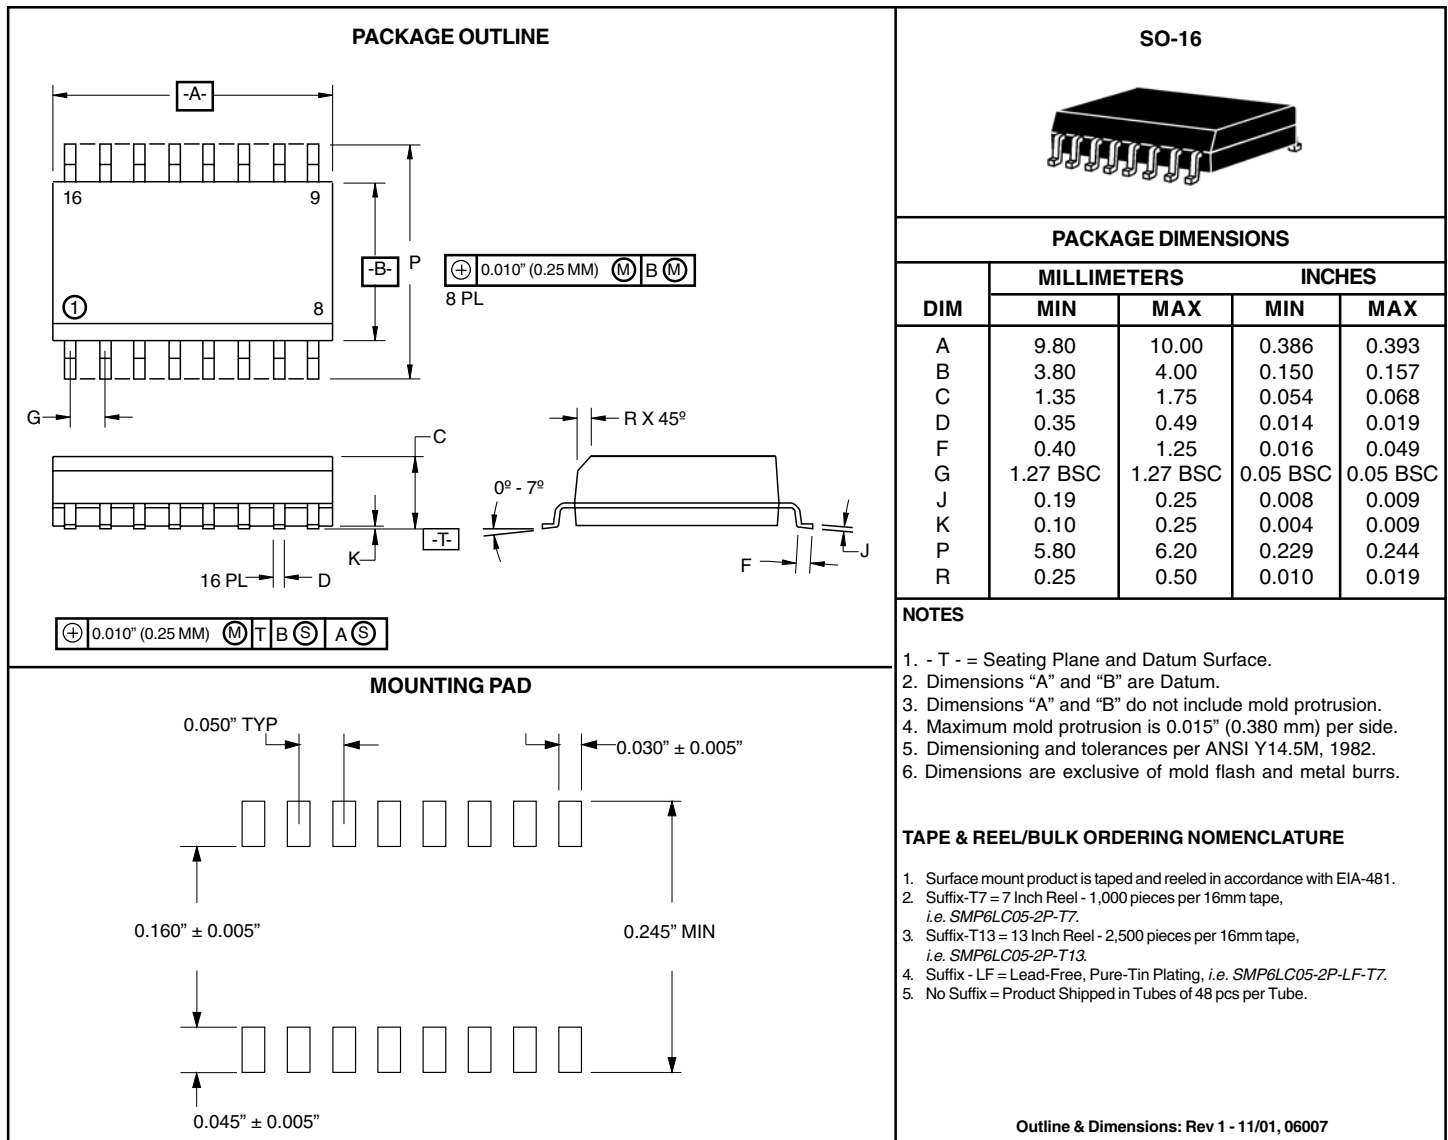

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
 2929 South Fair Lane, Tempe, AZ 85282
 Tel: 602-431-8101 Fax: 602-431-2288
 E-Mail: sales@protekdevices.com
 Web Site: www.protekdevices.com