

DATA SHEET

198 PHR-SI
Aluminum electrolytic capacitors
Power High Ripple Current Snap-in

Product specification
Supersedes data of 11th January 2001
File under BCcomponents, BC01

2001 Nov 15

Aluminum electrolytic capacitors

Power High Ripple Current Snap-in



198 PHR-SI

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, miniaturized dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Very high ripple current capability
- Keyed polarity version available.

APPLICATIONS

- Motor control and industrial systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems.

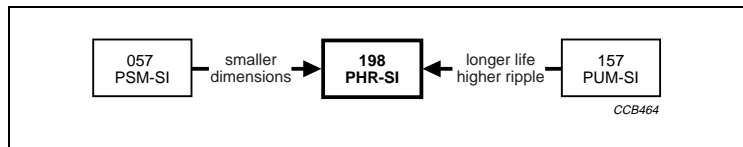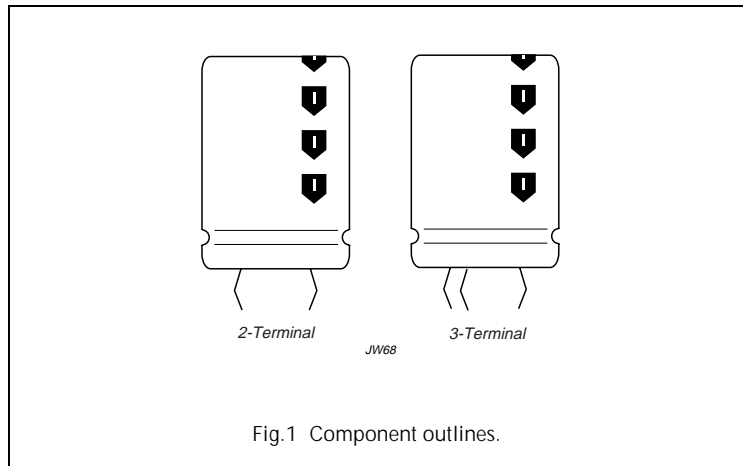

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Case size ($\varnothing D_{nom} \times L_{nom}$ in mm)	22 × 25 to 35 × 60
Rated capacitance range (E6/E12 series), C_R	56 to 680 μ F
Tolerance on C_R	$\pm 20\%$
Rated voltage range, U_R	400 and 450 V
Category temperature range	-25 to +85 °C
Endurance test at 85 °C	7000 hours
Useful life at 85 °C	15000 hours
Shelf life at 0 V, 85 °C	1000 hours
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	25/085/56

Aluminum electrolytic capacitors

Power High Ripple Current Snap-in

198 PHR-SI

Selection chart for C_R , U_R and relevant nominal case sizes ($\varnothing D \times L$ in mm)

Preferred types (2-terminals) in **bold**.



C_R (μF)	U_R (V)	
	400	450
56	22 × 25	22 × 25
68	22 × 25	22 × 30
82	–	22 × 30
	–	25 × 25
100	22 × 30	22 × 35
	–	25 × 30
120	22 × 35	22 × 40
	25 × 30	25 × 30
	–	30 × 25
150	22 × 40	25 × 40
	25 × 35	30 × 30
180	25 × 40	25 × 40
	30 × 30	30 × 35
	35 × 25	35 × 25
220	25 × 45	25 × 50
	30 × 35	30 × 40
	35 × 30	35 × 30
270	30 × 40	30 × 45
	35 × 30	35 × 35
330	30 × 45	30 × 50
	35 × 35	35 × 40
390	30 × 50	35 × 45
	35 × 40	–
470	35 × 45	35 × 50
560	35 × 50	35 × 60
680	35 × 60	35 × 60

Aluminum electrolytic capacitors Power High Ripple Current Snap-in



198 PHR-SI

MECHANICAL DATA AND PACKAGING QUANTITIES

Two terminal snap-in

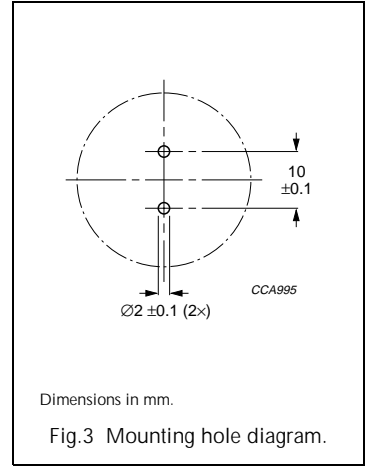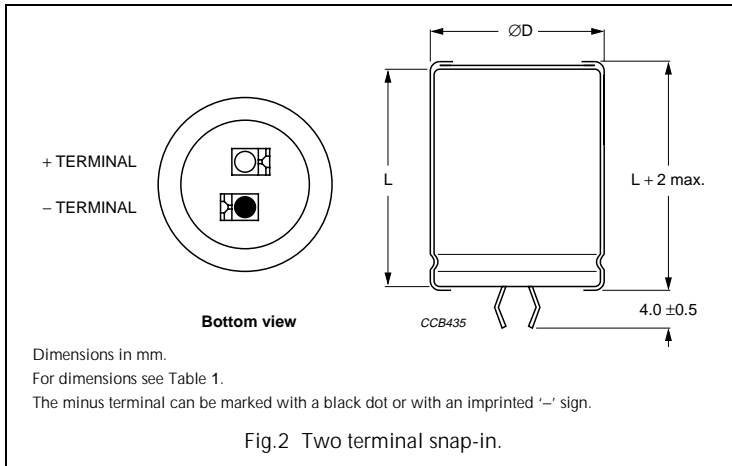

Three terminal snap-in

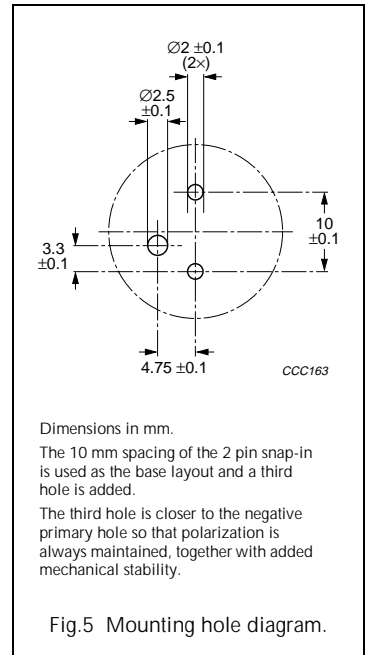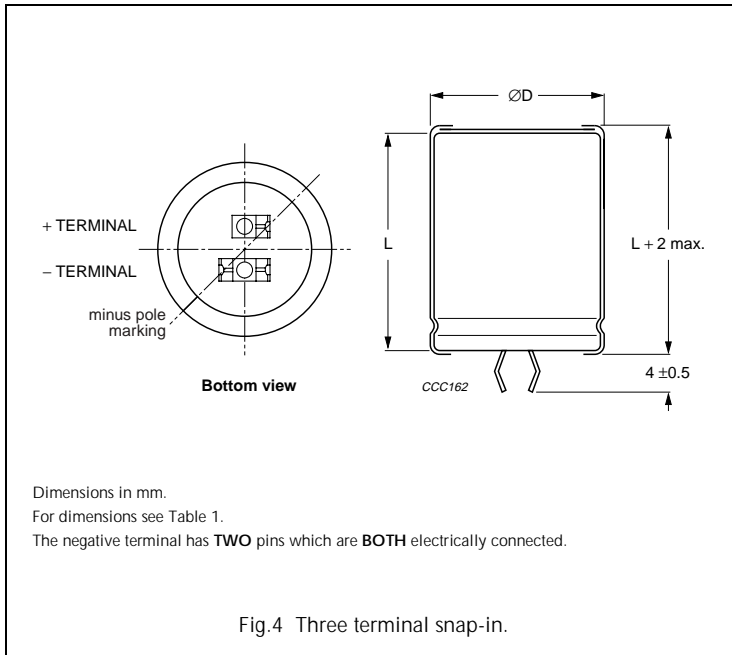

Aluminum electrolytic capacitors

Power High Ripple Current Snap-in

198 PHR-SI

Table 1 Physical dimensions, mass and packaging information; see Figs 2 and 4

NOMINAL CASE SIZE ØD × L (mm)	ØD _{max} (mm)	L _{max} (mm)	MASS (g)	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS l × w × h (mm)
22 × 25	23	27	≈12	100	260 × 250 × 39
22 × 30	23	32	≈16	100	260 × 250 × 44
22 × 35	23	37	≈20	100	260 × 250 × 49
22 × 40	23	42	≈23	100	260 × 250 × 54
25 × 25	26	27	≈20	100	290 × 280 × 39
25 × 30	26	32	≈22	100	290 × 280 × 44
25 × 35	26	37	≈24	100	290 × 280 × 49
25 × 40	26	42	≈27	100	290 × 280 × 54
25 × 45	26	47	≈32	100	290 × 280 × 59
25 × 50	26	52	≈38	100	290 × 280 × 64
30 × 25	31	27	≈25	100	340 × 330 × 39
30 × 30	31	32	≈30	100	340 × 330 × 44
30 × 35	31	37	≈35	100	340 × 330 × 49
30 × 40	31	42	≈40	100	340 × 330 × 54
30 × 45	31	47	≈45	100	340 × 330 × 59
30 × 50	31	52	≈50	100	340 × 330 × 64
35 × 25	36	27	≈33	50	390 × 198 × 39
35 × 30	36	32	≈40	50	390 × 198 × 44
35 × 35	36	37	≈48	50	390 × 198 × 49
35 × 40	36	42	≈55	50	390 × 198 × 54
35 × 45	36	47	≈63	50	390 × 198 × 59
35 × 50	36	52	≈72	50	390 × 198 × 64
35 × 60	36	62	≈87	50	390 × 198 × 74

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in µF)
- Tolerance code on rated capacitance (M for ±20%)
- Rated voltage (in V)
- Climatic category in accordance with "IEC 60068"
- Date code (year and week) in accordance with "IEC 60062"
- Code for factory of origin
- Name of manufacturer
- '-' sign to indicate the negative terminal, visible from the top and side of the capacitor
- Code number (last 8 digits).

Aluminum electrolytic capacitors

Power High Ripple Current Snap-in

198 PHR-SI

ELECTRICAL DATA AND ORDERING INFORMATION

Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20\text{ °C}$,
 $P = 86$ to 106 kPa , $RH = 45$ to 75% .

SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz
I_R	rated RMS ripple current at 100 Hz, 85 °C
I_{L1}	max. leakage current after 1 minute at U_R
I_{L5}	max. leakage current after 5 minutes at U_R
ESR	typ./max. equivalent series resistance at 100 Hz
Z	typ./max. impedance at 10 kHz

Ordering example

Electrolytic capacitor 198 PHR-SI

470 $\mu\text{F}/450\text{ V}$; $\pm 20\%$

Nominal case size: $\varnothing 35 \times 50\text{ mm}$

2-TERMINAL SNAP-IN:

Catalogue number: 2222 198 57471.

3-TERMINAL SNAP-IN:

Catalogue number: 2222 198 77471.

Table 2 Electrical data and ordering information; preferred types in **bold**

U_R (V)	C_R 100 Hz (μF)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	I_R 100 Hz 85 °C (A)	I_{L1} 1 min (μA)	I_{L5} 5 min (μA)	TYP. ESR 100 Hz (m Ω)	MAX. ESR 100 Hz (m Ω)	TYP. Z 10 kHz (m Ω)	MAX. Z 10 kHz (m Ω)	CATALOGUE NUMBER 2222 198	
										2-TERM.	3-TERM.
400	56	22 × 25	0.72	138	49	918	1706	521	1085	56569	76569
	68	22 × 25	0.79	167	59	762	1405	434	905	56689	76689
	100	22 × 30	1.00	244	84	520	956	297	610	56101	76101
	120	22 × 35	1.14	292	100	433	796	247	450	46121	26121
	120	25 × 30	1.14	292	100	438	796	252	450	36121	16121
	150	22 × 40	1.33	364	124	348	637	199	363	66151	86151
	150	25 × 35	1.33	364	124	351	637	202	363	36151	16151
	180	25 × 40	1.51	436	148	293	531	169	295	36181	16181
	180	30 × 30	1.49	436	148	305	531	180	295	66181	86181
	180	35 × 25	1.56	436	148	327	531	200	295	26181	76181
	220	25 × 45	1.75	532	180	241	434	139	280	36221	90008
	220	30 × 35	1.56	532	180	250	434	147	280	26221	76221
	220	35 × 30	1.81	532	180	259	434	155	280	16221	86221
	270	30 × 40	1.95	652	220	205	354	121	263	36271	16271
	270	35 × 30	1.93	652	220	222	354	137	263	66271	86271
	330	30 × 45	2.22	796	268	169	290	101	210	36331	16331
	330	35 × 35	2.18	796	268	181	290	112	210	66331	86331
	390	30 × 50	2.50	940	316	145	245	86	175	36391	16391
	390	35 × 40	2.44	940	316	154	245	95	175	66391	86391
	470	35 × 45	2.72	1132	380	129	203	80	153	36471	16471
	560	35 × 50	3.03	1348	452	110	171	70	133	46561	26561
	680	35 × 60	3.53	1636	548	91	140	57	110	46681	26681

Aluminum electrolytic capacitors

Power High Ripple Current Snap-in

198 PHR-SI

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ∅D × L (mm)	I _R 100 Hz 85 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	TYP. ESR 100 Hz (mΩ)	MAX. ESR 100 Hz (mΩ)	TYP. Z 10 kHz (mΩ)	MAX. Z 10 kHz (mΩ)	CATALOGUE NUMBER 2222 198	
										2-TERM.	3-TERM.
450	56	22 × 25	0.71	155	54.4	865	1706	479	940	57569	77569
	68	22 × 30	0.82	188	65.2	709	1405	392	765	57689	77689
	82	22 × 30	0.89	225	77.8	592	1165	329	645	47829	27829
	82	25 × 25	0.91	225	77.8	604	1165	339	645	57829	77829
	100	22 × 35	1.02	274	94	485	956	270	525	47101	27101
	100	25 × 30	1.05	274	94	491	956	274	525	57101	77101
	120	22 × 40	1.14	328	112	406	796	225	443	47121	27121
	120	25 × 30	1.13	328	112	415	796	233	443	57121	77121
	120	30 × 25	1.16	328	112	431	796	248	443	67121	87121
	150	25 × 40	1.36	409	139	328	637	184	353	47151	27151
	150	30 × 30	1.36	409	139	340	637	194	353	57151	77151
	180	25 × 40	1.47	490	166	277	531	157	303	47181	27181
	180	30 × 35	1.54	490	166	282	531	161	303	57181	77181
	180	35 × 25	1.46	490	166	316	531	191	303	67181	87181
	220	25 × 50	1.71	598	202	226	434	127	263	47221	27221
	220	30 × 40	1.75	598	202	232	434	133	263	57221	77221
	220	35 × 30	1.72	598	202	248	434	148	263	67221	87221
	270	30 × 45	1.98	733	247	191	354	110	225	47271	27271
	270	35 × 35	1.96	733	247	202	354	120	225	57271	77271
	330	30 × 50	2.22	895	301	158	290	91	195	47331	27331
330	35 × 40	2.22	895	301	167	290	100	195	57331	77331	
390	35 × 45	2.46	1057	355	142	245	85	170	57391	77391	
470	35 × 50	2.73	1273	427	120	203	73	145	57471	77471	
560	35 × 60	3.10	1516	508	100	171	60	120	57561	77561	
680	35 × 60	3.30	1840	616	88	140	55	110	57681	77681	

Customized products

If you are unable to find the capacitor you require, please contact your local BCcomponents sales organization; we are able to design and manufacture customized capacitors to meet your specific requirements.

Aluminum electrolytic capacitors

Power High Ripple Current Snap-in

198 PHR-SI

Additional electrical data

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	≥400 V versions	$U_s = 1.1 \times U_R$
Reverse voltage		≤1 V
Current		
Leakage current	after 1 minute at U_R	$I_{L1} \leq 0.006C_R \times U_R + 4 \mu A$
	after 5 minutes at U_R	$I_{L5} \leq 0.002C_R \times U_R + 4 \mu A$
Inductance		
Equivalent series inductance (ESL)	all case sizes	typ. 19 nH
		max. 25 nH

Aluminum electrolytic capacitors


Power High Ripple Current Snap-in

198 PHR-SI

RIPPLE CURRENT AND USEFUL LIFE

Table 3 Multiplier of ripple current (I_R) as a function of frequency

FREQUENCY (Hz)	I_R MULTIPLIER
50	0.86
100	1.00
300	1.17
600	1.24
1000	1.29
≥ 10000	1.40

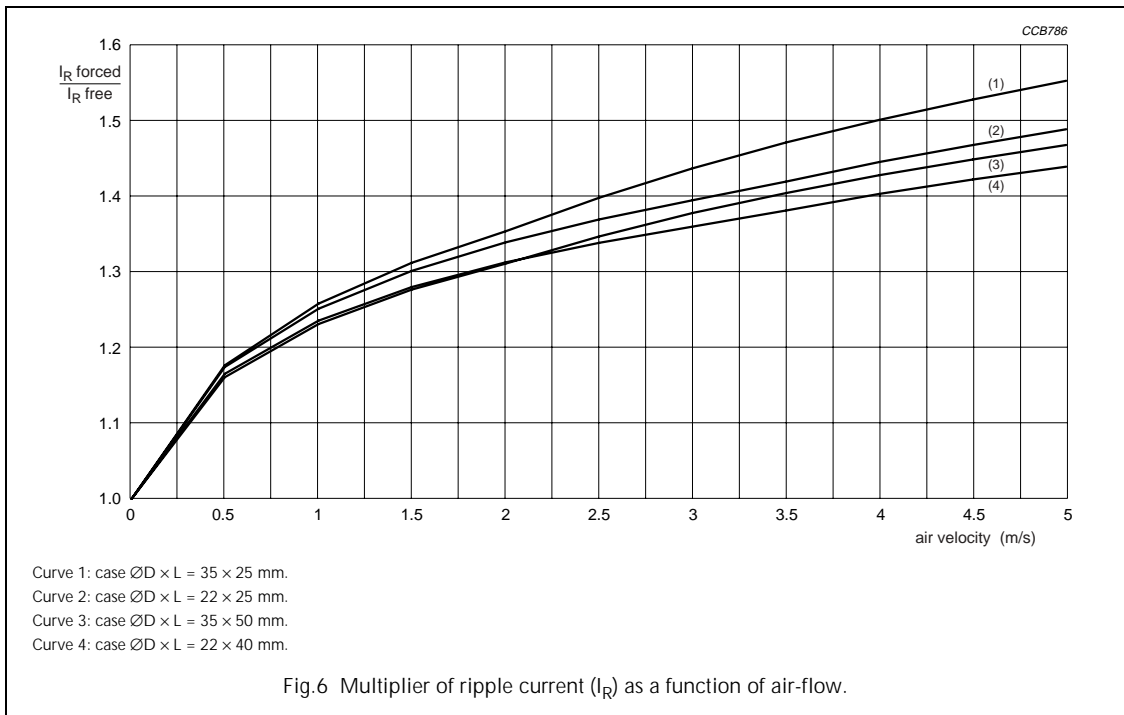

Maximum ripple current multiplier


CALCULATION EXAMPLE FOR CASE $\varnothing D \times L = 35 \times 25$ mm

PARAMETER	CONDITION	MAXIMUM RIPPLE CURRENT MULTIPLIER	VALUE
Ambient temperature (T_{amb})	70 °C	from nomogram; see Fig.7	1.57
Operating frequency (f)	300 Hz	from frequency table; see Table 3	1.17
Air-flow	2 m/s	from air-flow; see Fig.6	1.35

Therefore the maximum ripple current multiplier at 70 °C, 300 Hz and 2 m/s air-flow = $1.57 \times 1.17 \times 1.35 = 2.48$.

Aluminum electrolytic capacitors Power High Ripple Current Snap-in

198 PHR-SI

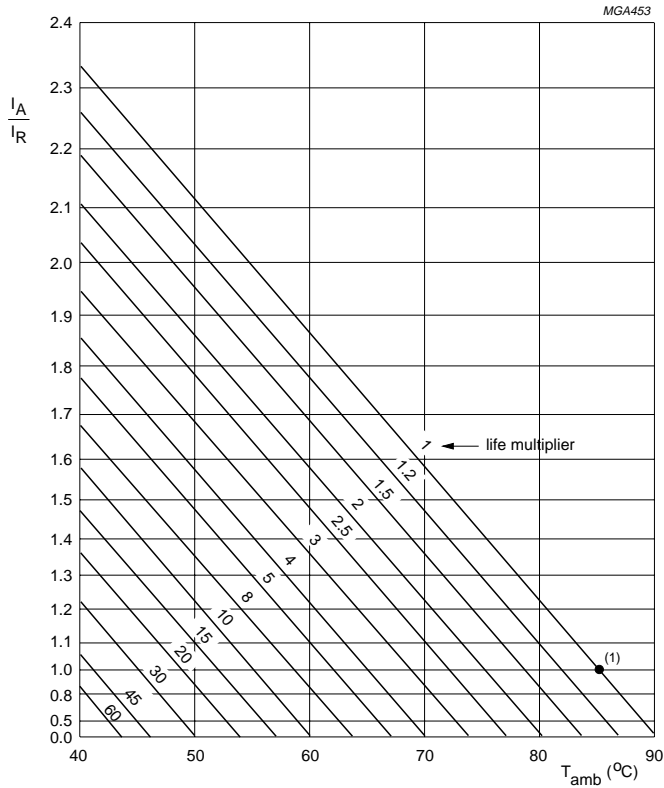

I_A = actual ripple current at 100 Hz.

I_R = rated ripple current at 100 Hz and 85 °C.

(1) Useful life at 85 °C and U_R applied: 15000 hours.

Fig.7 Multiplier of useful life as a function of ambient temperature and ripple current load.

Aluminum electrolytic capacitors

Power High Ripple Current Snap-in

198 PHR-SI

SPECIFIC TESTS AND REQUIREMENTS

General tests and requirements are specified in data handbook BC01, section "Tests and Requirements".

Table 4 Test procedures and requirements

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85\text{ °C}$; U_R applied; 7000 hours	$\Delta C/C: \pm 10\%$ $ESR \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85\text{ °C}$; U_R and I_R applied; 15000 hours	$\Delta C/C: \pm 30\%$ $ESR \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85\text{ °C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C: \pm 15\%$ $ESR \leq 2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$