


V23054E1026F110 Product Details

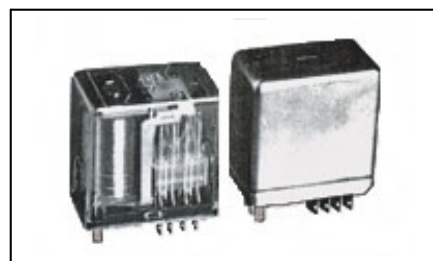

V23054E1026F110
(8-1393813-5)

TE Internal Number: 8-1393813-5

[Active](#)

Communications/Signal PC Board Relays

[Converted to EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- V23054/Cradle Relay S Series
- DC Actuating System
- Input Voltage = 60 VDC
- Contact Arrangement = 4 Form C, 4PDT, 4 C/O
- Contact Current Rating = 5 Amps.

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [Cradle S Relay Datasheet](#) (PDF, English)

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Termination Type = Solder/Plug-In Terminals

Electrical Characteristics:

- Actuating System = DC
- Input Voltage (VDC) = 60
- Contact Current Rating (Amps.) = 5
- [Coil Resistance \(?\)](#) = 3800
- Coil Power, Nominal (mW) = 1000
- Dielectric Between Coil and Contacts (V rms) = 500

Body Related Features:

- [Series](#) = V23054/Cradle Relay S
- Polarized = No

Contact Related Features:

- Mounting Options = Socket
- Enclosure = Dust Protected
- [FCC Part 68 Isolation](#) = No
- Approved Standards = None
- Contact Base Material = Silver, Gold Overlay
- Approx. Dimensions (L x W x H) (mm [in]) = 35.00 x 19.00 x 30.00 [1.378 x .748 x 1.181]
- Compatible Socket = With
- Contact Type = Single
- Pin Configuration = Industry Standard

Configuration Related Features:

- [Contact Arrangement](#) = 4 Form C, 4PDT, 4 C/O
- [Coil Magnetic System](#) = Non Polarized, Monostable
- Coil Suppression Diode = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive

Other:

- Brand = Axicom

Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat with Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)