


## Features:




- 1.1 dB NF**
- 15.0 dB Gain**
- +20.5 dBm P1dB**
- 34 dBm IP3**
- Single Positive Bias**
- Leadless Surface Mount Package**

The MPS-0810A9-02 is a low-noise, high dynamic range amplifier designed for ultra linear GSM, TDMA, CDMA, NMT-900 and ETACS receiver applications. The circuit is matched to 50 ohm and employs a single stage GaAs FET with internal matching to provide an exceptional noise figure, 1.1 dB, combined with a high IP3, +34 dBm. Typical applications are cellular base station receivers, tower mounted LNA's, picocell repeaters and receiver multi-couplers.



## Electrical Specifications @ 25°C, V<sub>dd</sub> = 6.0 V, Z<sub>o</sub> = 50 ohms

SYMBOL	PARAMETERS	Min	Typical	Max	Unit
<b>Freq</b>	Frequency Range	800		960	MHz
<b>SSG</b>	Small Signal Gain	14.0	15.0		dB
<b>P1 dB</b>	Pout at 1 dB Comp Point		+20.5		dBm
<b>IP3</b>	Third-Order Intercept		34.0		dBm
<b>NF</b>	Noise Figure		1.1	1.5	dB
<b>VSWR</b>	VSWR (Input/Output)		1.5:1	2.0:1	
<b>GOF</b>	Gain Var. over 40 MHz		± 0.2	± 0.5	dB
<b>GOT</b>	Gain Var. over Temp		-0.015		dB/°C
<b>I<sub>dd</sub></b>	DC Current		160	240	mA

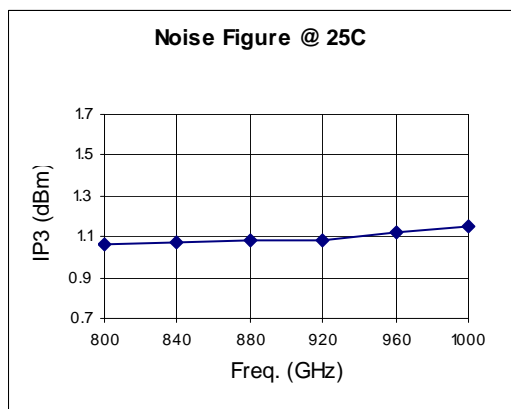


## Absolute Maximum Ratings

Maximum Bias Voltage	7.0 V
Maximum Continuous RF Input Power	+25 dBm
Maximum Peak Input Power	+27 dBm
Maximum Case Operating Temperature	+85 °C
Maximum Storage Temperature	- 65 to + 150 °C

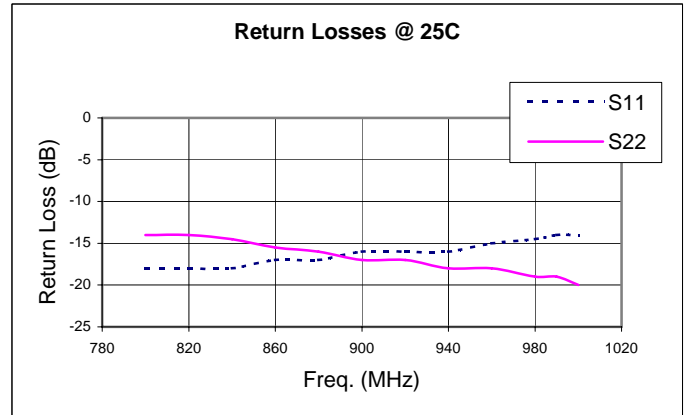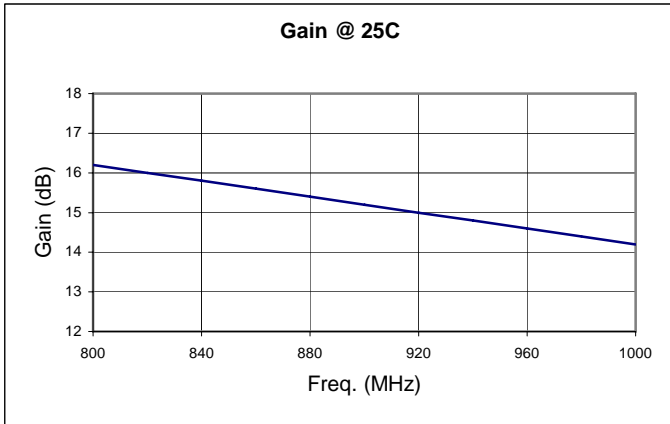

**Outline Diagram**

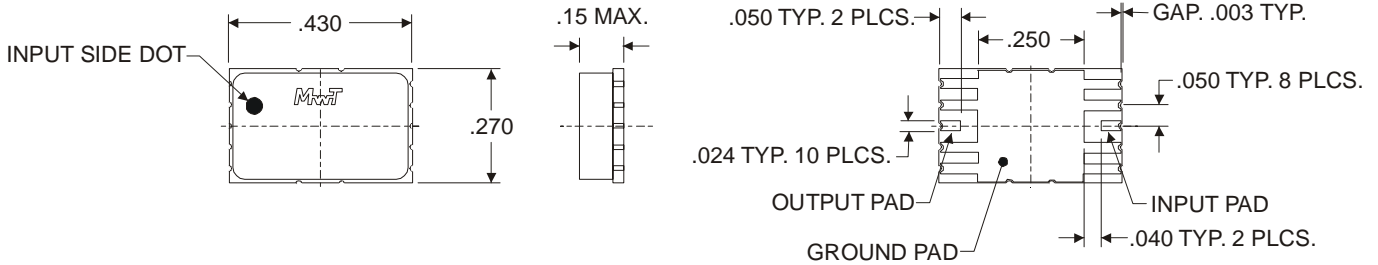

**Application Circuit**

