

PULSE RESISTORS, SURFACE MOUNT

PRM SERIES





- High voltage/ high surge capability
- Cost effective surface mount package
- Available on RCD's exclusive **SWIFT™** program

OPTIONS

- Opt. ER: Group A Screening per MIL-R-39008 RCR
- Opt. B: Increased power
- Opt. X: Non-inductive

Pulse tolerant surface mount resistors!

Series PRM withstand high energy pulses, and are superior to conventional film & wirewound types. The heavy duty construction features a ceramic core, enabling improved thermal transfer and long term stability. Elements are protected by flame-retardant molding for excellent environmental performance. Alpha-numeric marking is standard. PRM resistors are cost effective in a wide variety of pulse applications including telecom line feed resistors, snubber circuits, in-rush currents, capacitor charge/discharge circuits, lightning surges, etc.

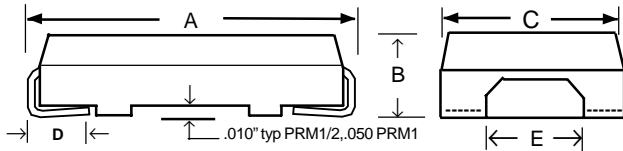


SUGGESTED
PAD LAYOUT

SPECIFICATIONS

RCD Type	Wattage Rating		Max. Voltage ^{1,3,4}	Max. Peak Pulse Voltage ^{2,4}	Resistance Range	DIMENSIONS Inch [mm]							
	Std	Opt B				A	B	C	D	E	F	G	H
PRM1/8	.125W	.5W	150V	3KV	0.1Ω - 2K	.200 ± .02 [5.1 ± .5]	.096± .015 [2.44± .38]	.120 ± .01 [3.18± .25]	.025 Min. [.63]	.045 ± .015 [1.14 ± .38]	.080 [2.0]	.100 [2.5]	.08 [2.0]
PRM1/4	.25W	1W	250V	5KV	0.1Ω - 8.2K	.250 ± .02 [6.3 ± .5]	.110± .015 [2.79± .38]	.150± .015 [3.81± .38]	.032 Min. [0.8]	.060 ± .015 [1.5 ± .38]	.100 [2.5]	.125 [3.2]	.120 [3.0]
PRM1/2	.5W	2W	350V	7KV	0.1Ω - 24K	.449 ± .032 [11.4 ± .81]	.180 ± .02 [4.57 ± .5]	.225± .015 [5.71± .38]	.060 Min. [1.50]	.080 ± .015 [2.0 ± .38]	.160 [4.0]	.157 [4.0]	.200 [5.0]
PRM1	1W	4W	500V	12KV	0.1Ω - 100K	.811 ± .020 [20.6 ± .5]	.275± .020 [6.99± .5]	.273± .020 [6.93± .5]	.085 ± .02 [2.16 ± .5]	.110 ± .02 [2.79 ± .5]	.200 [5.0]	.200 [5.0]	.600 [15.2]

¹ Rated continuous voltage = \sqrt{PxR} , nte value listed. ² Pulse voltage capability is dependent on res.value, waveform, & repetition rate. ³ Expanded range available ⁴ Multiply by 0.7 on Opt.X parts

SURGE CAPABILITY

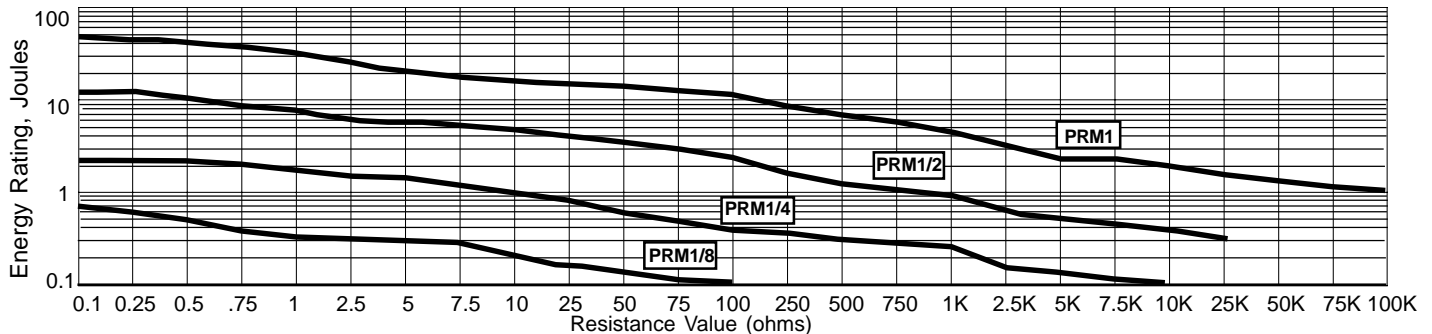

TYPICAL PERFORMANCE CHARACTERISTICS

Wattage Derating	1.25%/°C >70°C (Opt. B to be derated 0.8%/°C >25°C)
Max. Induc*: Opt. X ≤ 50Ω Max. Induc*: Opt. X > 50Ω	0.2uH PRM1/8-1/2, .3uH PRM1 0.37uH PRM1/8-1/2, .6uH PR1M
Short-time Overload	±0.5%
Temperature Cycling	±0.5%
TCR (20ppm avail.)	±120ppm/°C (<0.2Ω=200ppm)
Moisture Resistance	±1%
Shock and Vibration	±0.2%
Effect of Soldering	±0.2%
Voltage Coefficient	±0.005%/V
Load Life	±0.5% Std, ±1% Opt.B
Operating Temp Range	-55 to +150°C, +275°C avail.
Dielectric Strength	500V (1KV avail.)

* specify Opt.75 for induc levels 50% that of Opt.X, or Opt.76 for 33% that of Opt.X

APPLICATION NOTE

Use above chart to select appropriate model⁴ to meet the required surge level. Pulse voltage not to exceed Peak Voltage rating, and the average power during repetitive pulses not to exceed rated wattage. For improved reliability and performance, a 30% safety factor is recommended for infrequent pulses and 50% for repetitive pulses (e.g. select part rated 13joules for a single 10j pulse, or 15j for repetitive 10j pulses). Verify selection by evaluating under worst-case conditions. Depending on res. value, Series PRM can satisfy the surge requirements of UL217, UL268, UL294, UL497A, UL508, UL913, UL943, UL991, UL1459, UL1971, ANSI/IEEE C62.41, CCITT (Rec. K17), Bellcore TR-NWT-001089, Bellcore TR-TSY-000057, CSA C22.2 No. 225, IEC 664, IEC 801.5, IEEE587, Canadian Doc. CS-03, FCC Part 68. Consult factory for assistance.

P/N DESIGNATION:

PRM1/2 - **1001** - **K** **T**

RCD Type **PRM1/2**
 Options: X, ER, B (leave blank if std)
Resis. Code 0.5%-1%: 3 signif. figures & multiplier, e.g. R100=0.1Ω, 1R00=1Ω, 1000=100Ω, 1001=1K.
Resis. Code 2%-10%: 2 signif. figures & multiplier, e.g. R10=0.1Ω, 1R0=1Ω, 101=100Ω, 102=1KΩ
Tolerance: J=5% (standard), F=1%, G=2%, K=10%
Packaging: B = bulk, T = Tape & Reel
Optional TC: 20 =20ppm, 50= 50ppm (leave blank if standard)