



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	20A 277V AC 1HP 277V AC 1/2HP 125V AC	Mounting Hole	Circuit									
	<table border="1"> <tr> <td>Contact Resistance</td> <td>50m ohm Max.</td> </tr> <tr> <td>Insulation Resistance</td> <td>DC 500V 100M ohm Min.</td> </tr> <tr> <td>Dielectric Strength</td> <td>AC 1500V 1 minute</td> </tr> <tr> <td>Switch Function</td> <td>4P DPST ON-OFF</td> </tr> <tr> <td>Operation Temp.</td> <td>0° C ~ 85° C</td> </tr> </table>	Contact Resistance	50m ohm Max.	Insulation Resistance	DC 500V 100M ohm Min.	Dielectric Strength	AC 1500V 1 minute	Switch Function	4P DPST ON-OFF	Operation Temp.	0° C ~ 85° C	
Contact Resistance	50m ohm Max.											
Insulation Resistance	DC 500V 100M ohm Min.											
Dielectric Strength	AC 1500V 1 minute											
Switch Function	4P DPST ON-OFF											
Operation Temp.	0° C ~ 85° C											

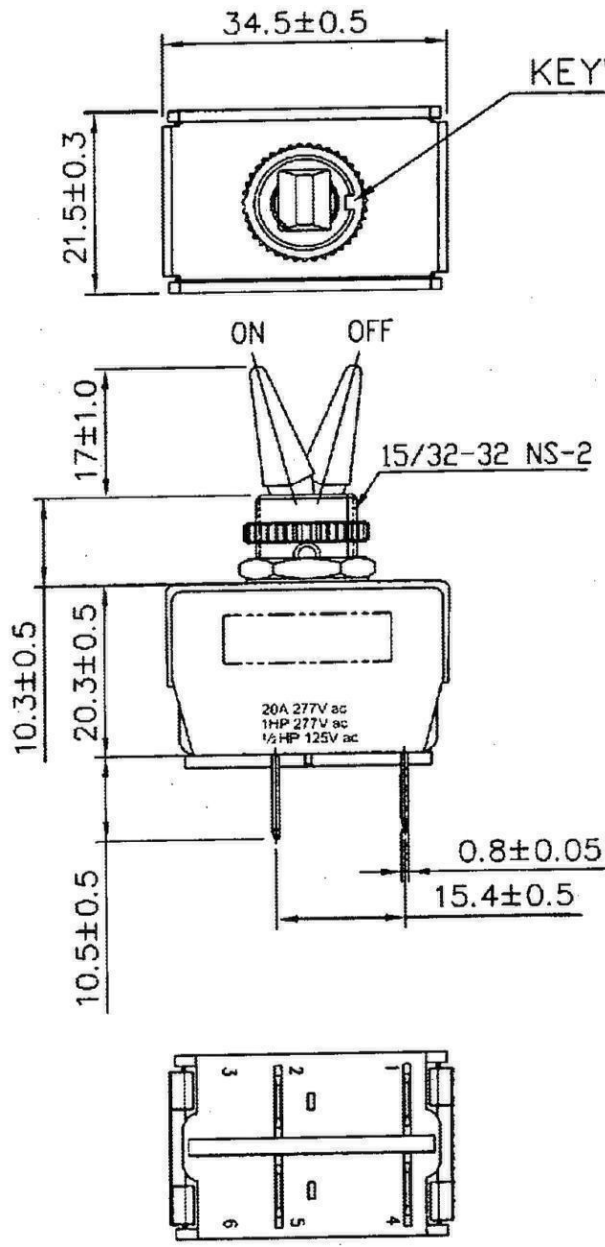

MATERIAL:
 Frame: Nylon 66, Black UL Flame: 94-V2
 Lever: Plastic
 Cover: PA#66+30%GF A0520
 UL Flame: 94-V0
 Terminal: Copper Alloy
 Contact: Copper Alloy
 Waterproof: IP56

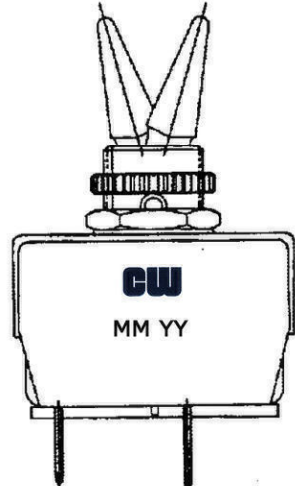

RoHS Compliant

1 Removed ϕ_{US} from drawing. 8/17/10.

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 2/3/09
 Title: **TOGGLE SWITCH**

Rev. 1
 Unit: mm
 CW P/N:

Checked By: **G. Guld**
GTS448F301AHR