

isc Silicon NPN Power Transistor

2SC3371

DESCRIPTION



- Collector-Emitter Sustaining Voltage-  
:  $V_{CEO(SUS)} = 500V(\text{Min.})$
- Low Collector Saturation Voltage  
:  $V_{CE(sat)} = 1.0V(\text{Max.}) @ I_C = 8A$
- High Speed Switching

APPLICATIONS

- Designed for power switching applications.

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ C$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	800	V
$V_{CEO}$	Collector-Emitter Voltage	500	V
$V_{EBO}$	Emitter-Base Voltage	7	V
$I_C$	Collector Current-Continuous	15	A
$I_{CM}$	Collector Current-Peak	30	A
$I_B$	Base Current-Continuous	5	A
$P_C$	Collector Power Dissipation @ $T_C = 25^\circ C$	200	W
$T_j$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ C$

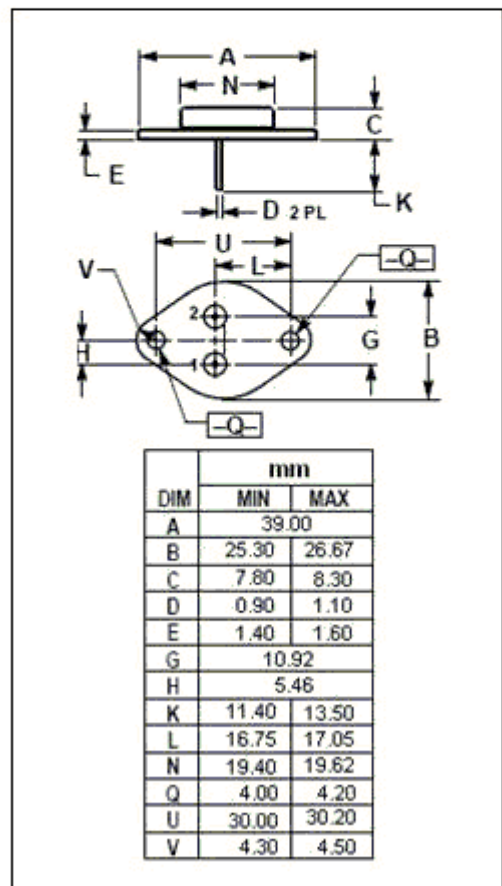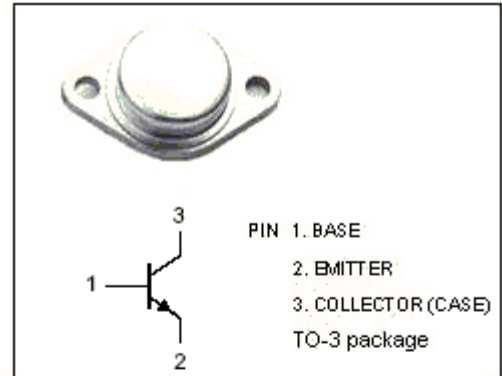

## isc Silicon NPN Power Transistor

## 2SC3371

## ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=0.5\text{A}$ ; $L=25\text{mH}$	500			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=8\text{A}$ ; $I_B=1.6\text{A}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=8\text{A}$ ; $I_B=1.6\text{A}$			1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=800\text{V}$ ; $I_E=0$			0.1	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5\text{V}$ ; $I_C=0$			0.1	mA
$h_{FE-1}$	DC Current Gain	$I_C=0.1\text{A}$ ; $V_{CE}=5\text{V}$	15			
$h_{FE-2}$	DC Current Gain	$I_C=8\text{A}$ ; $V_{CE}=5\text{V}$	10			

Switching Times; Resistive Load

$t_{on}$	Turn-on Time	$I_C=8\text{A}$ ; $I_{B1}=-I_{B2}=1.6\text{A}$ ; $V_{CC}=200\text{V}$			1.0	$\mu\text{s}$
$t_s$	Storage Time				3.0	$\mu\text{s}$
$t_f$	Fall Time				1.0	$\mu\text{s}$