

塑封快恢复高压二极管


反向电压 4KV

正向电流 5mA

Plastic Fast Recover High Voltage Rectifier

Reverse Voltage 4KV

Forward Current 5mA

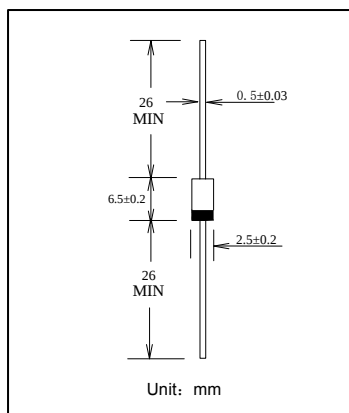

特征 Features

- 适用于高稳定显示器或电视接收机及办公类自动化设备
For high resolution displays or TV receivers and Working automation equipment
- 扩散结
Diffused-junction
- 具有良好的高温输出特性
Excellent high temperature output characteristics
(Small leakage current at high temperature and excellent reverse characteristics)

极限值和温度特性 $T_A = 25^\circ\text{C}$ 除非另有规定。Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL04	单位 Unit
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	4	KV
正向平均电流 Average Forward Current	$I_{F(AV)}$	5 (正弦半波50HZ, 电阻负载 $T_A=25^\circ\text{C}$) (50HZ half-sine wave, Resistance load $T_A=25^\circ\text{C}$)	mA
正向(不重复)浪涌电流 Non-Repetitive Forward Surge Current	I_{FSM}	0.5 (正弦半波50HZ, 1/2周期, $T_A=25^\circ\text{C}$) (50HZ half-sine wave, 1/2 cycle, $T_A=25^\circ\text{C}$)	A
工作环境温度 Ambient Temperature	T_{amb}	-40 --- +100	$^\circ\text{C}$
最高结温 Maximum Junction Temperature	$T_{(vj)}$	120	$^\circ\text{C}$
贮存温度 Storage Temperature	T_{stg}	-40 --- +120	$^\circ\text{C}$

电特性 $T_A = 25^\circ\text{C}$ 除非另有规定。Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL04	单位 Unit
正向压降 Forward Voltage Drop $I_F = 10\text{mA}$	V_F	15	V
常温反向漏电流 Normal Temperature Reverse Current $V_R = V_{RRM}$	I_{RM1}	2	μA
高温反向漏电流 High Temperature Reverse Current $T_A = 100^\circ\text{C}$ $V_R = V_{RRM}$	I_{RM2}	5	μA
反向恢复时间 Reverse Recovery Time $I_F = 2\text{mA}$, $I_{rp} = 4\text{mA}$ 1mA recovery	t_{rr}	100	nS

特性曲线 Characteristic Curves

