

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 110g only
- High Power Density: 2.8Watts/Cubic Inch
- Efficiency 62%~77%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION


Item \ Model	* SA01H12~17	* SA01H17~24	SA0112H
Output Voltage	+12V~17V	+17V~24V	12V
Output Rating	15W Max.	15W Max.	1.25A
Input Voltage	AC 90~264V		AC 90~132V or 180~264V
Input Frequency	47~63Hz		
Input Current	0.6A Maximum		0.6A or 0.3A Maximum
Inrush Current	30A Maximum		
Line Regulation	2% Maximum		
Load Regulation	± 5%		
Ripple & Noise	1% Maximum		
Efficiency	80% Typical	82% Typical	77% Typical
Temperature Coefficient	0.05%/°C		
Over-Voltage Protection	24V~34V Maximum	34V~48V Maximum	24V Maximum
Operating Temperature	0~40°C		
Storage Temperature	-20~85°C		
Safety Description	Fig. A	---	UL, CUL, PSE
	Fig. B	---	---
	Fig. C	---	---
	Fig. D	---	TUV

(*): Under Development (I/P): In Process


Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434

ORDERING INFORMATION

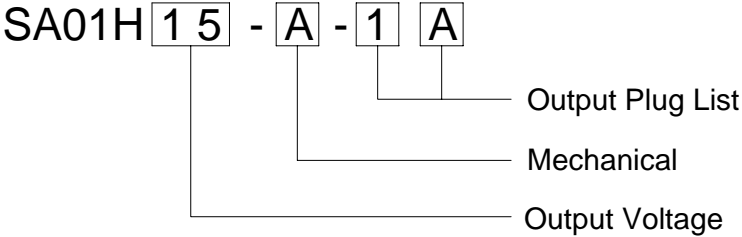

MECHANICAL

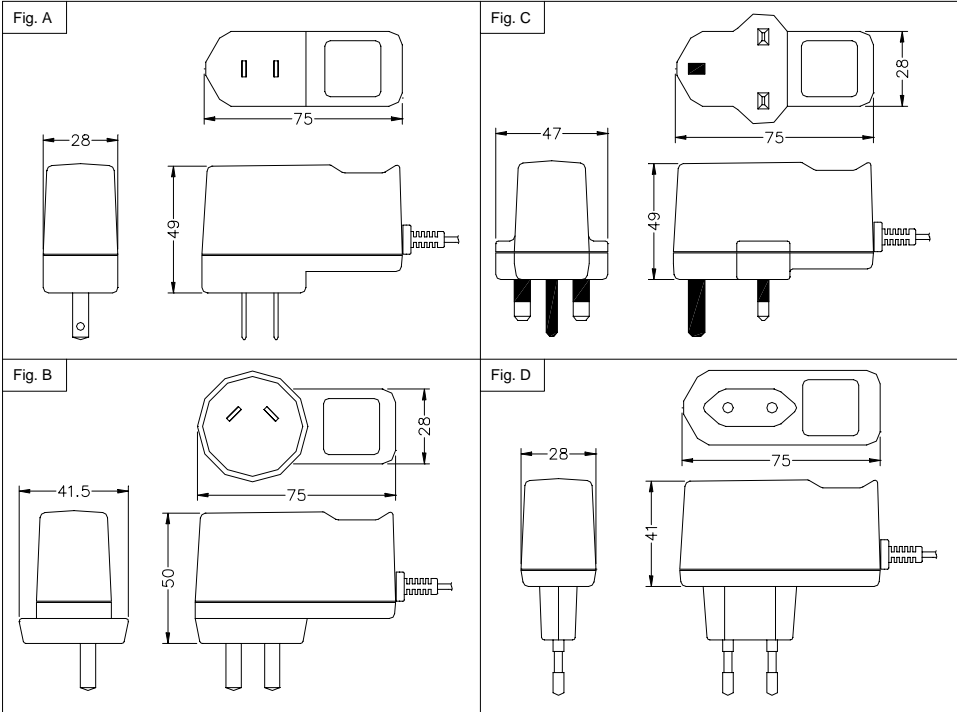

Unit: m.m.

Standard Output Cable:
20AWG, UL 2468, 1800mm

