



1. Dimensions:

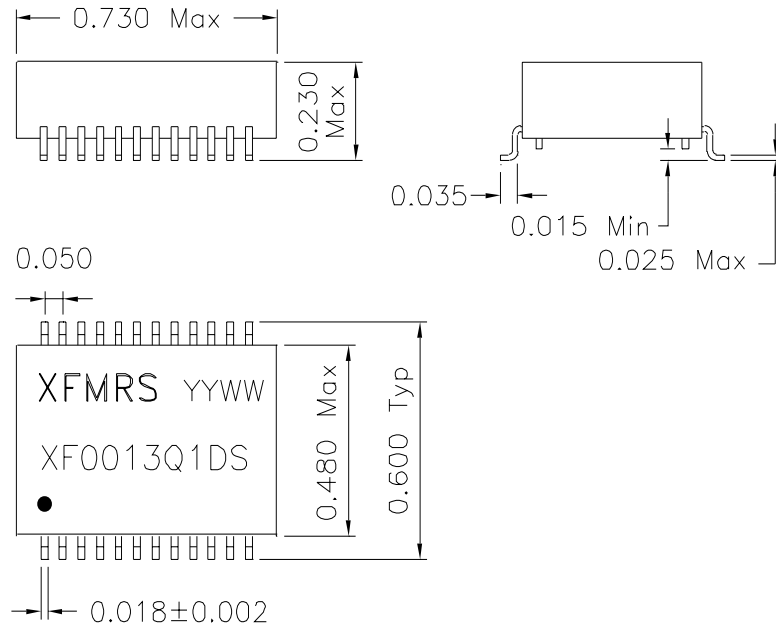

2. Schematic:

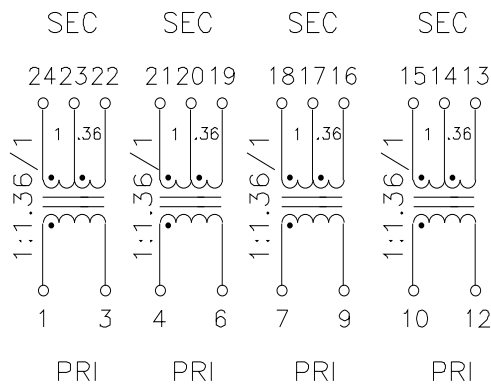

DOC. REV: A/1

3. Electrical Specifications: @25°C

- Isolation: 1500 Vrms (PRI to SEC)
- Turns Ratio: 1:1.36/1±2% (PRI:SEC)
- PRI OCL: 1.20mH Minimum @100KHz 50mV
- Cw/w: 30pF Maximum @100KHz 50mV (PRI/SEC)
- PRI LL: 0.4uH Maximum @100KHz 50mV (SEC Shorted)
- PRI DC Res.: 0.7 Ohms Max
- SEC DC Res.: 1.0 Ohms Max

XFMRS Inc		Title: T1/E1/CEPT QUAD PORT	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XFO013Q1DS	REV. A	
	DWN.	李清儿	Mar-10-00
	CHK.	孙悦	Mar-10-00
SHEET 1 OF 1	APP.	Joe Huff	Mar-10-00