NOTES:

1. HOOD: ZINC DIE CAST; NICKEL PLATED
2. CABLE STRAIN RELIEF: ZINC DIE CAST; NICKEL PLATED
3. PLASTIC SPACERS TO PREVENT MISALIGNMENT OF HIGH POWER CONTACTS: PBT GF UL 94 V-0; BLACK
4. JACKSCREW: STEEL; NICKEL PLATED; SLOTTED
5. FIXING SCREW: ZINC PLATED; CROSS RECESSED; TYPE H, SIZE 1
6. SCREW FOR CABLE STRAIN RELIEF: ZINC PLATED; CROSS RECESSED; TYPE H, SIZE 1

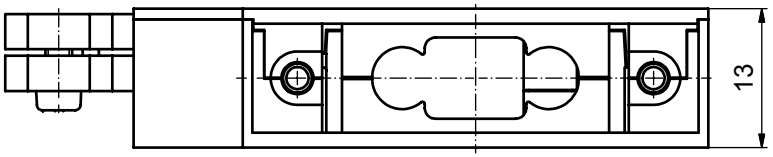

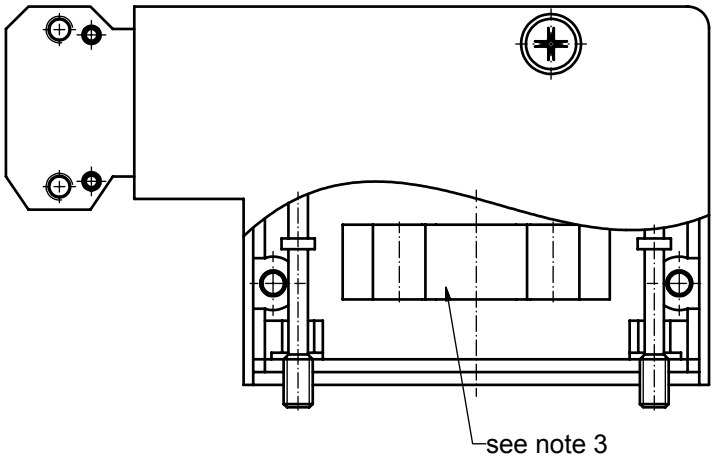

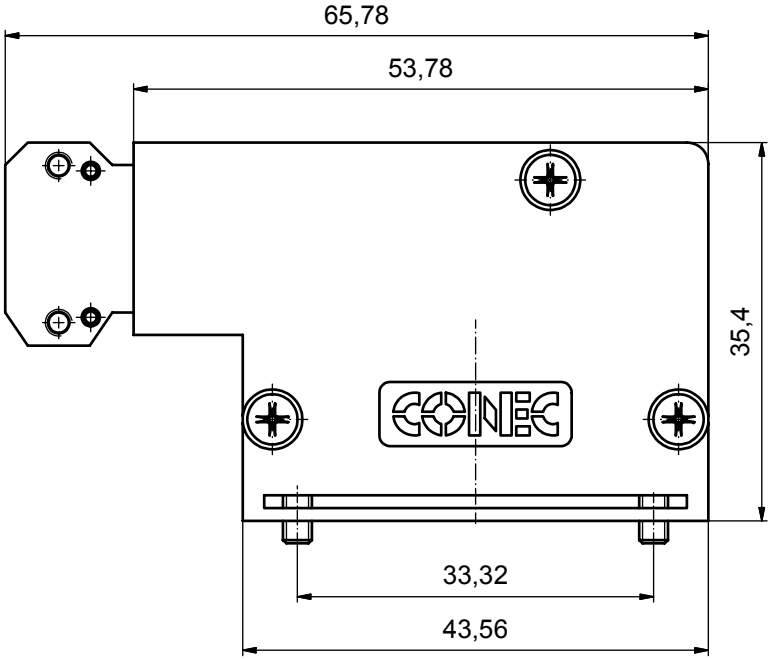

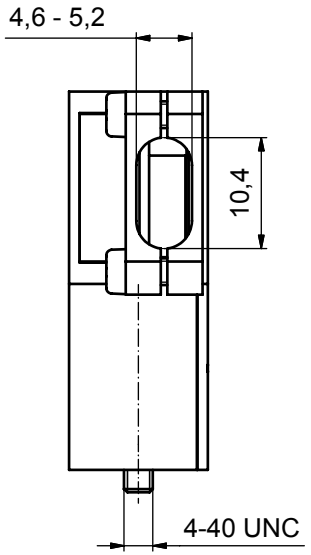

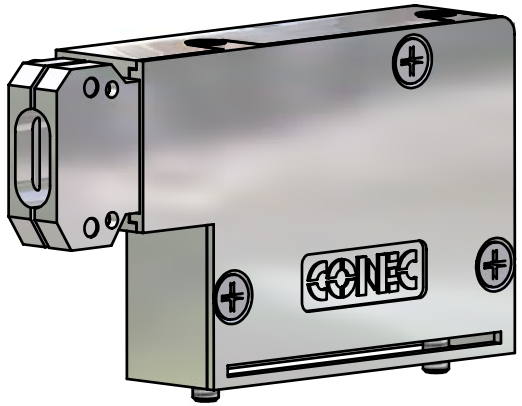

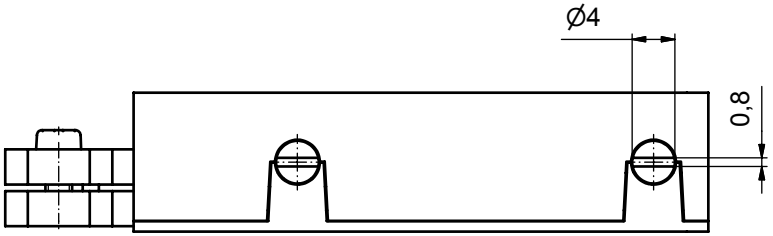

Directive 2002/95/EC „RoHS“ Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance

dim. in mm

	date	name
drawn	20.09.07	Schmidt
appd.	20.09.07	Koch
norm		
d-old	SK0726T1	

scale: 2:1

material: see notes

title: Hood µTCA
for use with 7W2 connector
side cable exit

dwg no: 16K1A2148

Inventor 10

DIN-A3

sh: 1

part no: 16-000010